Color Television

Service
Service
Service

7621

ServiceManual

Contents **Page**

Safety Notes 2
General Information 10
Disassembly 13
Adjustment Procedures 26
Circuit Description 56
Waveforms 100
Electrical Diagrams 114
Exploded Views 184
Parts List 188

©Copyright 2004 Philips Consumer Electronics
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by means, electronic, mechanical, photographic, or otherwise without the prior permission of Philips.

Published by Philips Consumer Electronics Subject to modification 2004 Nov 30

IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done, or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a ⚠ or "S" by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

*** Broken Line ____ _ ____ _ ____ _ ____**

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.

2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.

3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.

4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.

5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.

6. Critical components having special safety characteristics are identified with an **'S'** by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematic diagrams and /or exploded views.

7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.

8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.

9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

*** Broken line ____ _ ____ _ ____ _ ____**

LEAKAGE CURRENT COLD CHECK

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.

2. Turn on the power switch.

3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.

2. Connect a 1.5k, 10W resistor paralleled by a 0.15uF. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown below.

3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.

4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5mA. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.

5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the ac line cord directly into a 120Vac outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument ac switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5mA. Reverse the instrument power cord plug in the outlet and repeat the test. See the graphic below.

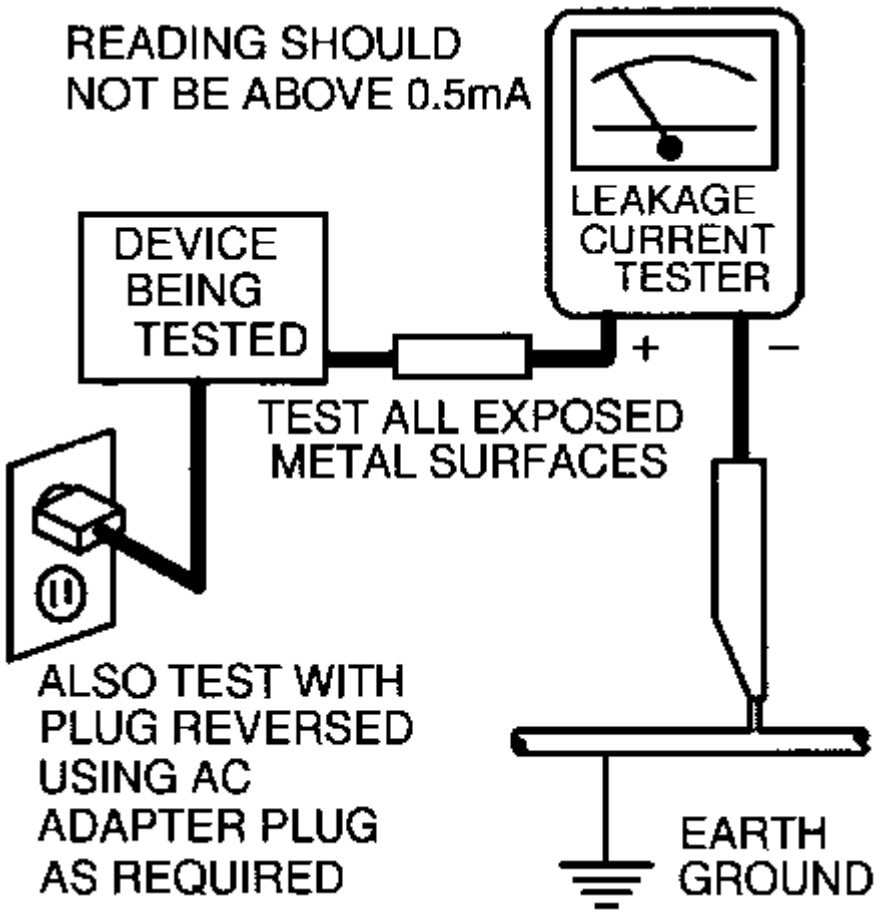
READING SHOULD
NOT BE ABOVE 0.5mA
LEAKAGE
CURRENT
TESTER
DEVICE
BEING
TESTED
+
–
TEST ALL EXPOSED
METAL SURFACES
ALSO TEST WITH
PLUG REVERSED
USING AC
ADAPTER PLUG
AS REQUIRED
EARTH
GROUND

TV SAFETY NOTES

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

Fire and Shock Hazard
Implosion
X-Radiation
Leakage Current Cold Check
Leakage Current Hot Check
Picture Tube Replacement
Parts Replacement

WARNING: Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.

SERVICE NOTE: The CRT DAG is not at chassis ground.

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.

2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.

2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.

3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.

4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.

5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.

7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.

8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.

USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices, Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.

3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.

4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.

5. Do not use Freon propelled chemicals. These can generate electrical charges sufficient to damage ES devices.

6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).

7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:
This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

PRACTICAL SERVICE PRECAUTIONS

IT MAKES SENSE TO AVOID EXPOSURE TO ELECTRICAL SHOCK. While some sources are expected to have a possible dangerous impact, others of quite high potential are of limited current and are sometimes held in less regard.

ALWAYS RESPECT VOLTAGES. While some may not be dangerous in themselves, they can cause unexpected reactions – reactions that are best avoided. Before reaching into the powered color TV set, it is best to test the high voltage insulation. It is easy to do, and is just a good service precaution.

BEFORE POWERING UP THE TV WITH THE BACK OFF (or on a test fixture), attach a clip lead to the CRT DAG ground and to a screwdriver blade that has a well insulated handle. After the TV is powered on and high voltage has developed, probe the anode lead with the blade, starting at the bottom of the High Voltage Transformer (flyback – IFT). Move the blade to within two inches of the connector of the CRT. **IF THERE IS AN ARC, YOU FOUND IT THE EASY WAY, WITHOUT GETTING A SHOCK!** If there is an arc to the screwdriver blade, replace the High Voltage Transformer or the lead, (if removable) whichever is causing the problem.

PICTURE TUBE REPLACEMENT PROCEDURE

Note: a. Two (2) people are required to handle this picture tube.
b. Safety Glasses must be worn during this procedure or whenever directly handling a picture tube.
c. Take care in each step not to damage the CRT or the cabinet.

1. Remove the Chassis and the CRT Socket Board Module from the cabinet.
2. A furniture pad or blanket should be positioned on the floor to support only the CRT Face. This pad or blanket should be high enough to keep the CRT Face approximately 12 to 14 inches off the floor.
3. Using two people, place the cabinet in a front down position with the CRT Face on the pad or blanket.
4. Place padded blocks under each corner of the cabinet to keep it from rocking.
5. Remove the four screws, at the corners of the CRT.
6. With two people lowering the cabinet to the floor, leave the CRT elevated by the pad or blanket.

Note: Take care not to grasp the neck of the CRT during this procedure, as it is extremely fragile.

7. Two (2) people may then lift the CRT from the cabinet.
8. Remove the degaussing coil from the defective CRT and mount on the replacement. Take care to maintain the exact shape and fit.

To install the new CRT, reverse steps 1 to 7.

GENERAL INFORMATION

The following Product highlights while specific to the 43PP92 model, are typical of the features found on many of the HDR2002, DPT300 Series Models.

Product highlights

Multipoint digital convergence
Designed to meet the demands of curved CRT faceplates and short focal length lenses, our expansive 35-point convergence brings with it the accuracy of digital technology for flawless convergence of red, green, and blue guns and a superb picture with no colored haloes.

Automatic Phosphor Aging Compensation — APAC
Non-moving images can be bad for a television screen. If a video image remains stationary, it can eventually leave a permanent after-image on the screen. Video games and the stationary black bars which outline standard 4:3 programming on a widescreen TV compound this problem. Now, Philips has found a way to combat this problem through APAC technology. Periodically, APAC automatically shifts your television picture in very small increments, but increments large enough to blur image retention.

Coupled with the Philips Auto Format feature, you have excellent protection from the dreaded screen burn. Think of it as a screen saver for your TV.

Active Control™
Continuous picture analysis and control of Automatic Digital Noise Reduction and Auto Sharpness. Automatically offers the best picture settings. The demo menu shows real-time adjustments of two parameters based on picture content.

Eye Fidelity — Progressive Scan/Interlaced
Eye Fidelity gives the consumer a choice between two different scanning techniques — Progressive Scan and Interlaced. Progressive Scan doubles the number of visible picture lines per field by displaying all picture frame lines at once — also eliminating line flicker. The Interlaced mode provides for a double vertical display (interlaced) of Progressive Scan, which reduces annoying motion artifacts. The Interlaced mode also helps smooth out jagged lines sometimes seen on curved and angled surfaces.

Protective screen filter
This filter has been specifically formulated by Philips for HD displays to give the best possible picture and still protect your investment. The protective screen filter helps prevent accidental damage to the delicate front Lenticular screen.

High definition component
Supports HD video input for superb color purity, crisp color detail, and reduced color noise - Includes separate inputs for Y, Pb, Pr, horizontal sync and vertical sync.

3 line digital comb filter
Improved chroma/luminance separation over standard two-line glass comb filters for a difference you can really see. Offering vertical edge enhancement and virtually no "dot crawl," it easily supports the demands of DVD video players, Web browsers, and other advanced, high resolution video media programming
information for all television program listings, plot (through A/V inputs).

Picture-In-Picture
Used in conjunction with a second video source such as a DVD, VCR, or cable tuner, picture-in-picture allows you to monitor one TV channel while watching another; monitor a DVD or tape playback while watching another program, or monitor a TV channel while viewing an external source. Plus the main and secondary pictures may be swapped. In all cases, the main picture is provided with its corresponding audio.

Virtual Dolby ® Surround — 20 Watt RMS
Dolby ® processing circuitry for enhanced surround sound effect creates the sensation of Dolby ® Pro Logic without the hassle of additional rear speakers.

Universal remote control - RC2018/1

Universal RC managing TV and peripherals.

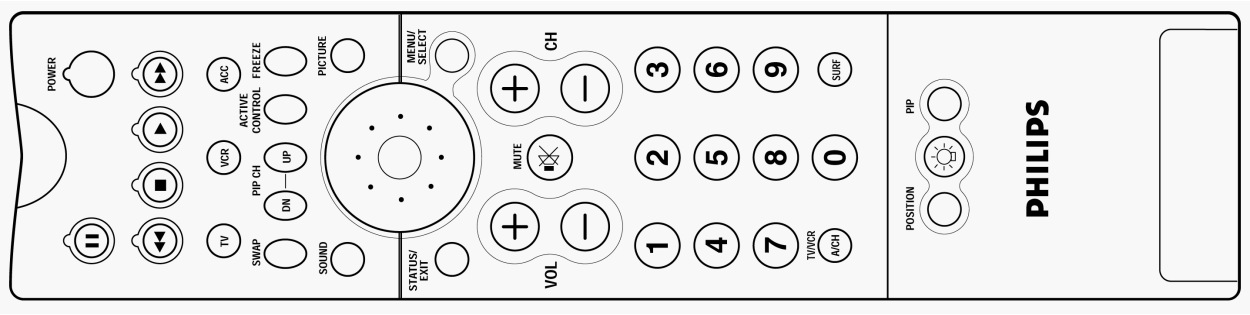

Supporting features

• Digital Color Transient Improvement (CTI)
• Digital Histogram
• Picture Freeze
• Auto Aspect Ratio Adaptation
• Incredible Surround™
• Automatic Volume Leveler (AVL)
• Independent headphone volume control
• EasyTune™ (Auto Search, Auto Tune, Auto Install)
• Alternate Channel
• AutoSurf™
• Low power standby (<1W)

DISASSEMBLY PROCEDURES

Disassembly Procedures (46, 50, 55, & 60 Inch Models)

All numbers found in the following text refer to the CABINET DISASSEMBLY EXPLODED VIEW drawing and apply to 46", 50", 55", and 60" models.

NOTE: If you are servicing a PCB or speaker, you do not have to remove the plastic upper Back cover.

Upper Back Cover (AC02)

1. Remove 12 screws (A).
2. Remove 3 screws (B).
3. Lift cover up to dislodge from pegs (J) and remove cover.

Lower Center Back Cover (AC04)

1. Remove 3 screws (B).
2. Remove 8 screws (C).

Lower Back Cover Removal

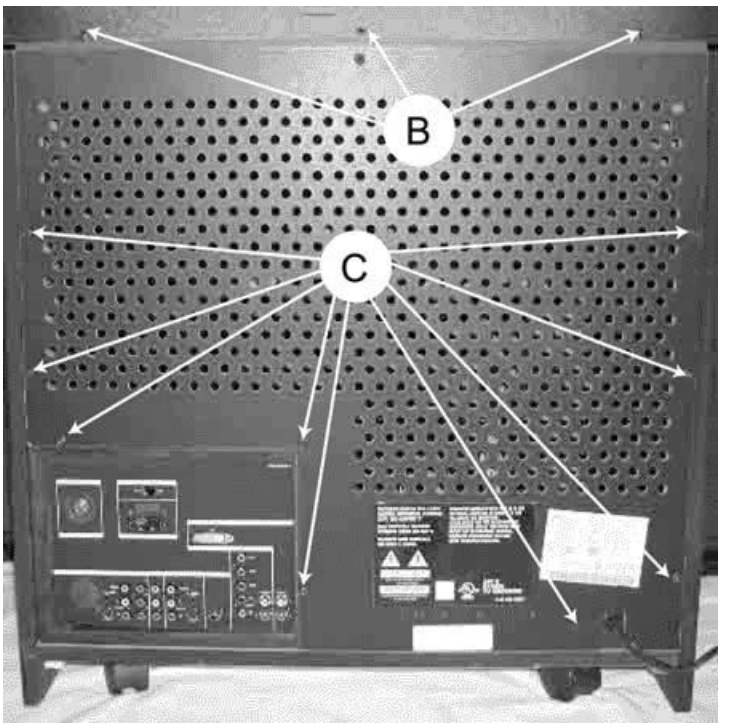

Service Position

(Note: Unplug the AC Line Cord)

This Service Position exposes the entire bottom side of the Power Supply Panel, Large Signal Panel (LSB), & the Small Signal Panel (SSM). A major portion troubleshooting can be accomplished after completing this procedure.

Display Service Position

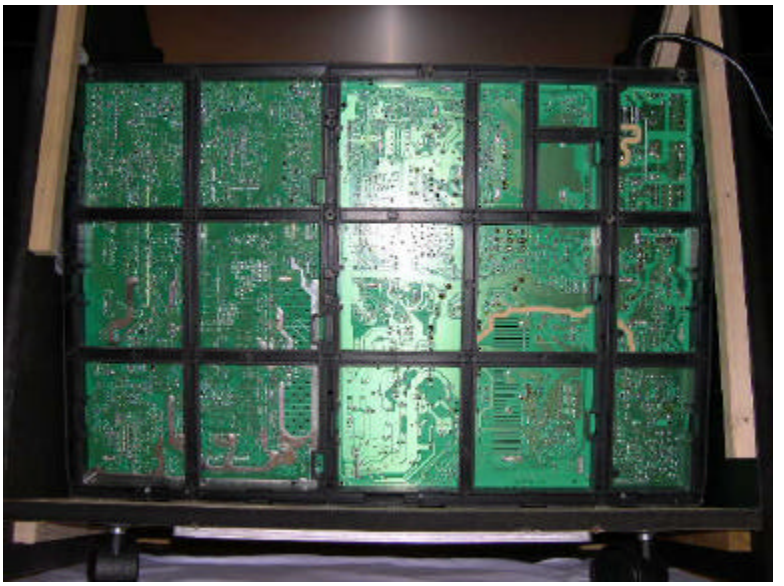

1. Remove Lower Back Cover.
   Remove 12 screws “B & C” required for Lower Back Cover Removal.
   Lower Back Cover Removal.

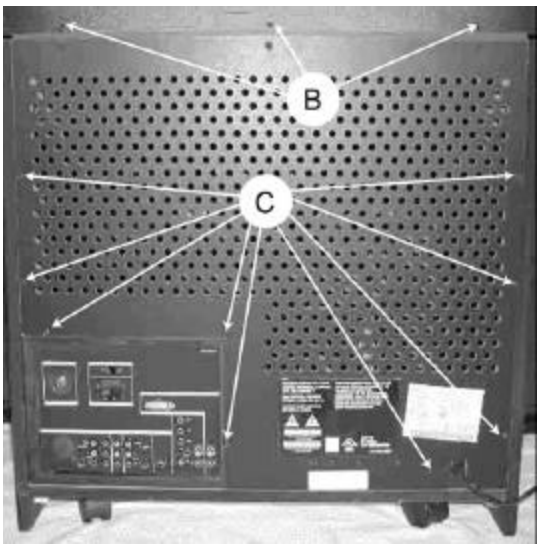

2. Loosen the Chassis Frame.
   Remove 5 screws “D” that fasten the Chassis Frame to the Cabinet Bottom.
   Service Pos. Detail - A.

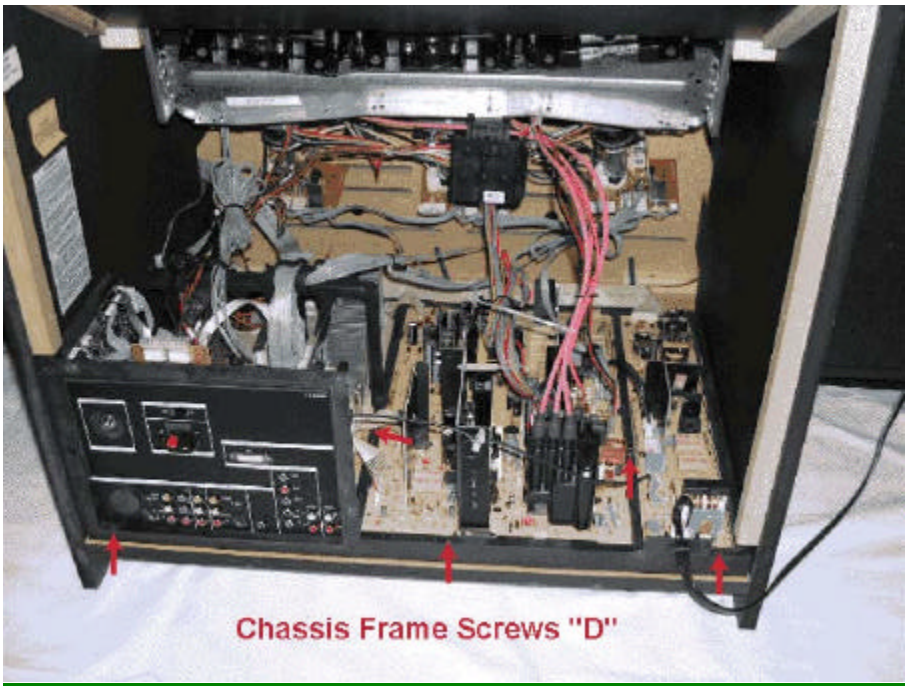

3. Remove Light Barrier (AC07)
   Service Detail - B

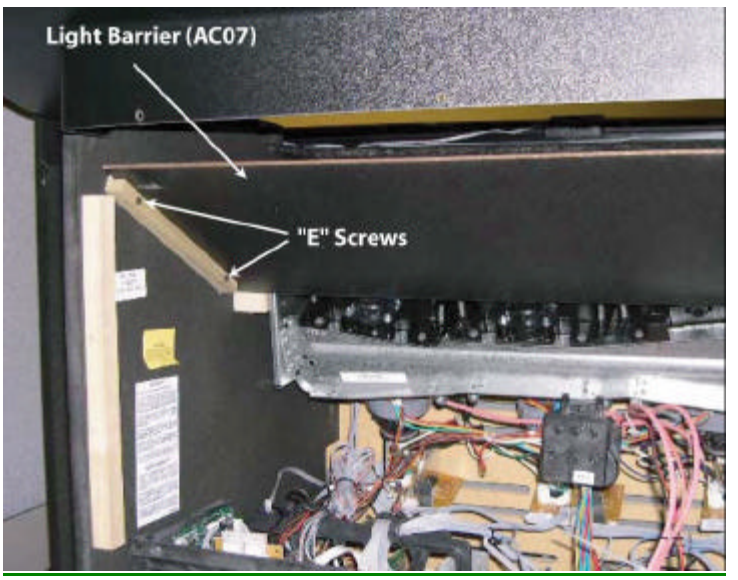

4. Remove 2 screws “E” from the Left Side - Light Barrier Guide and remove this Guide.
5. Grasp the corners of the Chassis Frame and slide in towards you about a inch.
   This is required in order that 3 metal cleats (AC36) holding the front edge of the Chassis Frame are released.
6. While holding the back edge of the Chassis Frame down, grasp the Panel Mounting Bracket (AC21) and slightly lift the front of the Chassis Frame.
   Service Detail - C

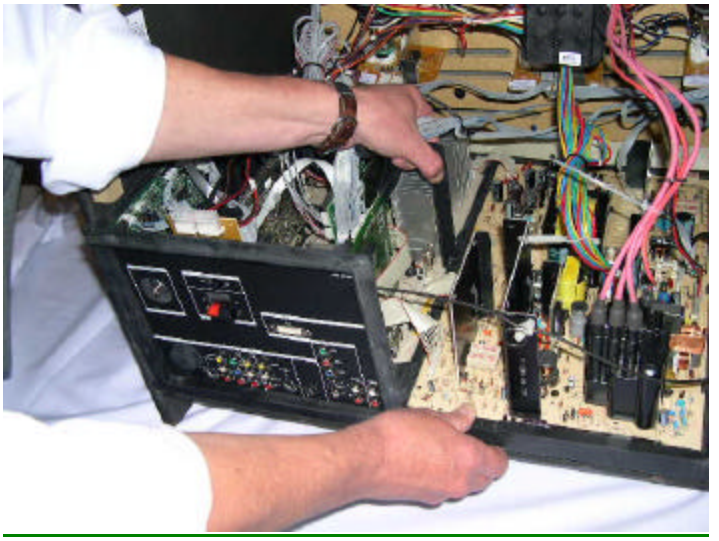

7. With the rear of the Chassis slightly raised, slide the entire Chassis forward (toward the Cabinet Front), just far enough that the Rear Jack Panel (AC08) clears the Left Side Mounting Block (for the Lower Back Cover).
   Service Position Detail - D

8. Now, lift the back edge of the Chassis Frame (nearest you), up while also lifting (slightly), the front edge to slide forward in to the Service Position shown.
   Service Position Detail - E

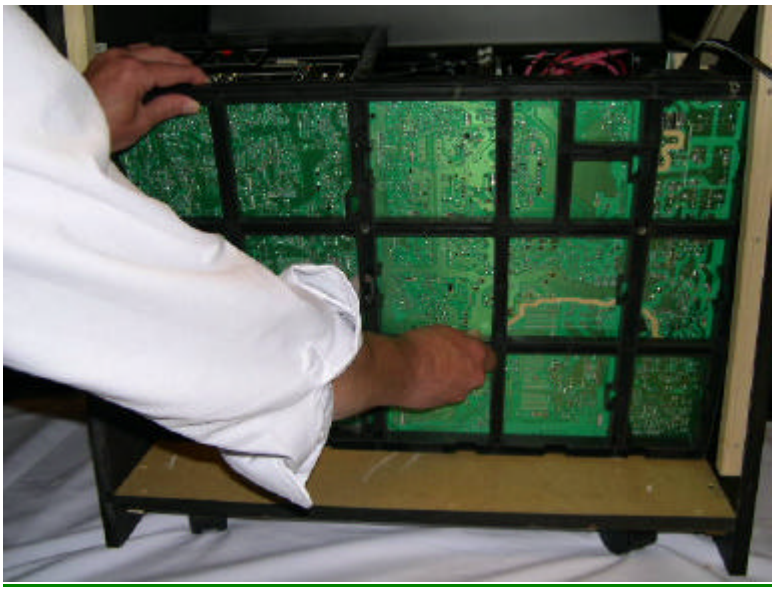

Mirror Mounting Board (AC18)

1. Remove 6 screws located in the mirror mounting board brackets and remove the board.
   Note: Care should be taken **NOT** to place fingerprints or smudges on the mirror.

Side Back Covers

1. Remove 4 screws (F) from each of the Side Back Covers. (Some prying may be necessary to dislodge covers.
   Note: This allows access to the Side Jack Panel and Left and Right Speakers.

Large Signal Panel

1. Remove 3 screws from center of the CBA and pull 3 tabs on right of bracket.
2. Lift right side of LSP and slide panel up and out.

Power Supply Panel

1. Remove 4 screws from CBA.
2. Lift PFC Filter Panel up and out.

Rear Jack Panel Cover (AC08 & AC27)

1. Complete steps 1 through 7 of the Service Position Procedure (see above). Note: Steps 3 & 4 may be omitted as removal of the Light Barrier and its Mounting Guide is not required.
2. With the Chassis loose from the cabinet bottom, and the entire chassis repositioned back towards the Cabinet Front, lift the left end of the Chassis Assembly in order to remove the previously hidden screw shown in the following detail. Note: This screw may be removed using a ¼ " nut driver or a T20 Torx Driver. In either case, an extension may be required in order to achieve the proper angle to the head of the screw.
   Jack Panel Hidden Screw.

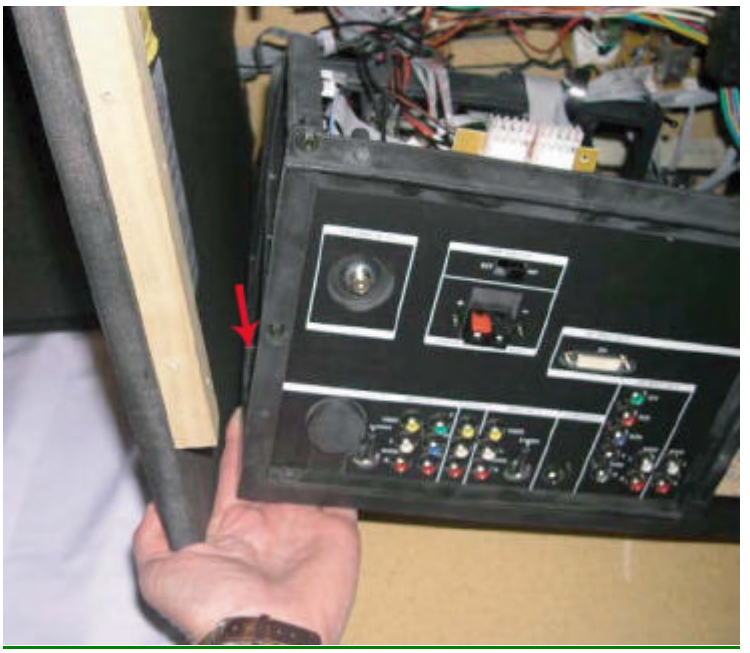

3. Remove 2 screws from the left edge and upper left corner of the Rear Jack Panel Cover. These 2 screws may be removed using a ¼ " nut driver or a T20 Torx Driver and be seen in the following display on the left edge and upper left corner.
4. Remove the nut around the 75 Ohm Antenna Input
5. Remove 10 more screws shown in the following using a Torx 10 Driver.

Jack Panel Screw Removals

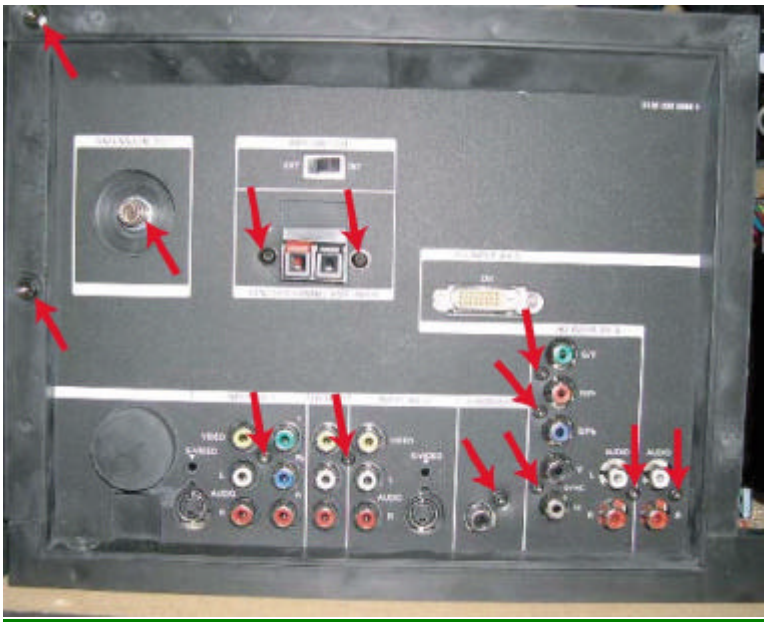

6. Disconnect 2 Connectors from the top of the Rear Switch Panel. This Panel fastens to the Jack Panel Cover and may easily be removed or reconnected once the Jack Panel Cover is completely free of the Chassis Assembly.
7. Although all screws should now have be removed, care must taken on Core Models featuring the HD Input. The Jack Panel Cover has a plastic hook that clips in to a hole on the DVI Panel. Gently lift this hook while removing the Jack Panel Cover.
   Jack Panel Hook to DVI Module.

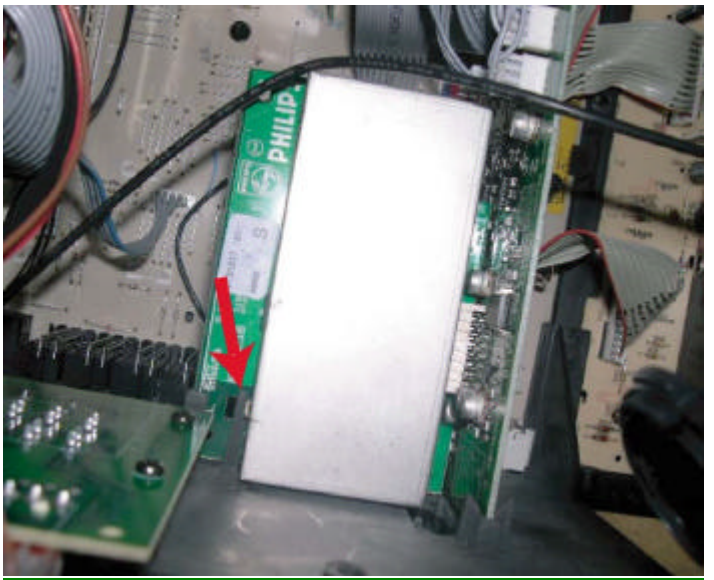

Small Signal Panel (SSM)

1. Remove rear Jack Panel cover (AC08).
2. Remove 2 screws from the center of the SSP CBA.
3. Pull 3 tabs on right of panel bracket.
4. Lift right side of SSP, then move to the right to remove.

Side Jack Panel

1. Remove Left Side Back Cover. (See procedure above.)
2. Remove 2 screws from panel.
3. Slide Side Jack Panel CBA out of bracket.

PIP Panel Removal

1. Remove rear Jack Panel cover (AC08).
2. Remove 3 screws from PIP panel.

Small Signal Board (SSB)

1. Remove panel support bracket (AC23).
2. Remove panel support bracket (AC21).
3. Tilt SSB to the right and then up.

Convergence (ACS) Panel Removal

1. Remove panel support bracket (AC21).
2. Release stay tabs on Left side of each board connector and carefully separate ACS from SSP connectors.

Wide Band Video (HOP) Panel

1. Remove panel support bracket (AC21).
2. Disconnect ribbon cable connectors.
3. Release stay tabs on Left side of each board connector and carefully separate from SSP connectors.

Front Control Panel and Left or Right Speaker

1. Remove front speaker baffle (AC30) by removing Left and Right Side Back Covers.
2. Release 2 tabs on either side of the speaker baffle.
3. Loosen ribbon cable and grounding wire to allow working space.
4. Remove 2 screws to remove Front Control panel.
5. Remove 4 screws each to remove speakers.

Plastic Light Barrier (Optical Assembly)

1. Remove 2 screws (E) located at either end of the plastic light barrier.

Complete Optical Assembly or Individual Light Box Assemblies

1. Remove the Plastic Light Barrier.
2. Disconnect the CRT panels, 2nd anode leads (at HVT), and yoke connectors from assemblies to be removed.
3. To remove the complete Optical Assembly, remove 4 screws (G), and lift assembly up and out.
4. To remove individual CRT assemblies, remove 4 screws (H), from the assembly you wish to remove, and lift assembly up and out.
   DO NOT disturb the focus assembly wing nuts.

Disassembly Procedures (43 Inch)

All numbers found in the following text refer to the CABINET DISASSEMBLY EXPLODED VIEW drawing for 43" models.

NOTE: If you are servicing a PCB or speaker, you do not have to remove the plastic upper Back cover.

Lower Back Cover (AC04)

1. Remove 8 screws (A).
2. Remove 4 screws (B).

Upper Back Cover (AC02)

Note: The upper back is a part of the MAIN unit and holds the Mirror.
Removal is only necessary for optical assembly maintenance.

1. Remove 9 screws (C).
2. Perform Lens frame removal procedure.
3. Remove 10 screws (D).

Speaker Baffle (AC30) and Speakers (AC25)

1. Perform Lower Back cover removal procedure. (AC04)
2. Remove 4 screws (E)
3. Carefully pull on Baffle to release guide tabs.
   (Note: Unit may have to be tilted backward to remove Baffle.)
4. Remove 4 screws each to remove speakers. (AC25)

Lens Frame Assembly (AC09) and Convergence Sensors

1. Perform Lower Back cover removal procedure. (AC04)
2. Perform Speaker Baffle removal procedure. (AC30)
3. Remove 9 screws (C). (Upper Back)
4. Remove 4 screws (F).
5. Tilt frame forward from top and disconnect cables to Side Jack Panel and Front Control Panel.
   NOTE: Before performing the next procedure, note the proper location of each of the 4 Convergence Sensors. **(Not in all models.)**
6. Snap out the 4 Convergence Sensors and slip connecting wires through slits in the Lens mounting rails.
   Note: Be sure to note proper wire routing for later replacement. Wires CANNOT be left so as to obstruct the mirror reflection.

Front Control Panel

1. Perform Lens Frame removal procedure.
2. Remove 2 screws (G).

Side Jack Panel

1. Perform Lens Frame removal procedure.
2. Remove 2 screws (H)
3. Slide Side Jack Panel CBA out of bracket.

Mirror (AC18) Removal

1. Perform Lens Frame removal procedure.
2. Remove 4 screws located in the mirror mounting brackets and remove the mirror.
   Note: Care should be taken **NOT** to place fingerprints or smudges on the mirror.

Large Signal Panel (LSB)

1. Remove 3 screws from center of the CBA and pull 3 tabs on right of bracket.
2. Lift right side of LSP and slide board up and out.

Power Supply Panel

1. Remove 4 screws from CBA.
2. Lift PFC Filter Panel up and out.

Small Signal Panel (SSM)

1. Remove 2 screws from the center of the CBA.
2. Pull 3 tabs on right of bracket.
3. Lift right side of Small Signal Board up, then to the right to remove.

PIP Panel Removal

1. Remove 3 screws from panel.

Removal of SSB Panel

1. Remove panel support clip (AC04).
2. Tilt top of SSB to the right and then up.

Complete Optical Assembly or Individual Light Box Assemblies

1. Perform Lower Back Cover removal procedure.
2. Perform Speaker Baffle removal procedure.
3. Perform Lens Frame removal procedure.
4. Perform Upper Back Cover removal procedure.
5. Disconnect the CRT Panels, 2nd anode leads (at HVT), and yoke connectors from all CRT assemblies.
6. Remove 4 screws located at front of Optical assembly and lift assembly up and out.
7. To remove individual CRT assemblies, loosen 4 screws located in the assembly you wish to remove and lift assembly up and out.

Service Position

(Note: Side Jack and Front Control Panels may have to be removed to allow cable slack.)

1. Perform Back Cover removal procedure.
2. Remove 7 screws (I).
3. Pull Chassis Frame back and up.
4. Tilt Chassis Frame upward on bottom of PTV.

Picture Tube Replacement

Refer to CRT Assembly Exploded View

Replacement of the cathode ray tube (CRT) and/or optical system components of a Projection TV (PTV) can be easily accomplished by following general guidelines. Use care when working around the CRT and optical systems of the PTV. The PTV light path encompasses a number of precision optical components. These include lenses, mirrors, the lenticular screen, and fresnel lens. The PTV incorporates three separate CRTs, representing green, red, and blue outputs. Each CRT uses an independent deflection/convergence yoke, magnetic centering ring, coupler, C-element lens, and output lens (A/B lens). Each tube is mechanically fastened to a coupler which houses fluid (a glycol-type substance) used to cool the high temperatures generated by the small (7") CRTs. The fluid also provides an optical characteristic supporting the optical system of the PTV. When replacement of a CRT or optical component is required, caution must be exercised in preventing fluid spillage. The technician must carefully reassemble the CRT/optical components, ensuring a proper seal of the coupling fluid. Use only factory original coupling fluid.
Caution: Do not use or add water as an alternative to the prescribed coupling fluid.
The following procedure should be used when performing repairs on the CRT/optical assemblies of the Projection TV.
Note: Upon completion of CRT/optical assembly repair, the centering, convergence, gray scale, mechanical and electrical focus adjustments are required. If more than one assembly requires repair, it is recommended the service technician fully complete one assembly at a time, using the existing assemblies as a reference for the alignment of the centering and convergence.

A. Single CRT/Lens Assembly from the Light Rack

1a) Remove AC power from the PTV.
2a) Remove the upper and lower back covers (1/4" screws).
3a) Remove the barrier board and the shield cover from around the lens assemblies (1/4" screws).
4a) Carefully remove the CRT Socket Board from the CRT of the CRT/optical assembly being serviced.
5a) Remove the yoke and convergence plugs, of the CRT/optical assembly being serviced, from the Large Signal Module.
6a) Remove the high voltage anode lead from the HV splitter block on the Large Signal Module of the CRT/optical assembly being serviced. Remove ground lug connectors from the coupler frame.
7a) Remove the four 1/4" screws that secure the CRT/lens assembly to the light rack. These four screws are located in each corner, on the top of the coupler assembly.

Caution: Do not remove the bolts with pressure springs or the inverted Torx screws of the CRT/lens assembly. The removal of these components could result in fluid spillage into the PTV cabinet.

8a) Carefully remove the CRT/lens assembly from the PTV cabinet.

Servicing the CRT/Optical Assembly

Caution: Do not attempt any repairs on the CRT/optical block assembly without first removing the CRT coupling fluid. Removal of the delta output lens will result in spillage of the coupling fluid.
Caution: Coupling fluid is a poisonous solution containing a high concentration of ethylene glycol. Do not leave exposed fluid unattended. Prevent children or pets from coming into contact with the fluid. Clean up spills immediately.

B. Removing the PTV Coupling Fluid

All repairs made to the CRT/optical block assembly require the removal of the coupling fluid. The following procedure describes how to remove the PTV coupling fluid.

1b) Lay the CRT assembly on its side with the plug pointing up.
2b) Remove the plug (X8).
3b) Remove some of the fluid from the coupler to prevent spillage when the CRT is removed. An empty coupling fluid bottle with a cone top is recommended to lower the fluid level within the coupler. Squeeze and hold the bottle and insert the tip of the cap into the drain hole of the coupler. Loosen the grip on the bottle, allowing the fluid to be pulled up into the bottle. Save the fluid.
4b) Reinstall the plug (X8).
5b) Stand the CRT assembly up with the neck of the CRT pointing up.
6b) With an awl or marking pen, outline the edges of the CRT onto the coupler.

Note: The correct positioning of the CRT to the coupler is critical to the optimum performance of the optical system.

7b) Remove the four CRT mounting bolts (A) (with springs and spacers) and remove the mounting bracket (D).
8b) Remove the four CRT mounting ear screws.

Note: The CRT mounting ear screws are not used on some assemblies.

9b) Gently remove any metal shavings from around the screw holes. Do not allow the metal shavings to get into the fluid.
10b) Note the position of the high voltage anode cap with respect to the coupler.
11b) Carefully remove the CRT from the coupler. Wipe any excess fluid from the faceplate of the CRT. Set the CRT aside.
12b) Use an empty coupling fluid bottle to extract the remainder of the fluid from the coupler.

Note: Complete removal of the coupling fluid is not necessary when only replacing the CRT.

13b) Clean any remaining fluid from the coupler and the CRT gasket channel using absorbent tissue. Refer to "C". Cleaning the Coupler, C-element Lens and CRT Faceplate procedure if the fluid is discolored or contaminated.
14b) Make all necessary repairs.

C. Cleaning the Coupler, C-element Lens and CRT Faceplate

1c) Remove CRT coupling fluid as described in steps 1b through 13b.
2c) Using denatured alcohol on a cloth made of 100% cotton or a lens cleaning tissue, gently clean the C-element (fisheye) lens, coupler and the CRT faceplate. Thoroughly clean the coupler assembly, including the expansion chamber bladder, and allow to fully dry.

Caution: Do not use soap or detergent type substances to clean the coupler and its related assemblies. Water can be used as an alternative to denatured alcohol, but the assemblies must be completely dry prior to reassembly of the coupler and the addition of the coupling fluid. A hair dryer may be used to dry the coupler and its assemblies prior to reassembly. If contaminated fluid is discovered, the coupler and its related assemblies must be completely disassembled and cleaned to prevent a reoccurrence.

3c) Replace the CRT and C-element lens gaskets.
4c) Reassemble the C-element lens and the output lens to the coupler.
5c) Refer to "Replacing the CRT Coupling Fluid" upon completion of necessary repairs and cleaning of the optical/coupler assemblies.

D. Replacement of the CRT

1d) Remove CRT coupling fluid as described in steps 1b through 13b.
2d) Remove the plastic protective coating (if present) from the faceplate of the replacement CRT.
3d) Refer to "Replacing the CRT Coupling Fluid" to complete the CRT replacement.

E. Repair or Replacement of the Optical/Coupler Assembly

1e) Remove CRT coupling fluid as described in steps 1b through 13b.
2e) Remove the four inverted-type Torx screws which secure the Delta output lens to the coupler. An inverted-type Torx socket can be purchased using part number 483539517303.
3e) Removal of the Delta output lens will allow access to the C-element lens, C-element gasket, coupler, and its assemblies.
4e) Refer to "Replacing the CRT Coupling Fluid" upon completion of necessary repairs to the optical/coupler assemblies.

F. Replacing the PTV Coupling Fluid

Note: Prior to replacing the CRT coupling fluid, ensure the expansion chamber bladder is fully collapsed. This can be easily inspected by viewing the bladder through the small hole on the expansion chamber assembly. If the rubber of the bladder is not easily visible through the small hole, then the bladder may be considered collapsed and fluid can be added. If the rubber of the expansion chamber bladder is visible at the hole of the expansion chamber, then replacement of the expansion chamber bladder is required.

Note: The CRT coupling fluid is critical to the optical performance of the PTV. Use only part number 483531057233 (3 bottle kit) or 483531067004 (1 bottle) to ensure the optical integrity and performance reliability of the PTV when replacing the CRT coupling fluid.

1f) Reinstall the CRT gasket into the gasket channel of the coupler. Confirm the placement of the CRT, C-element lens, and vent plug gaskets.
2f) Place the CRT onto the coupler with the high voltage anode lead positioned as marked in step 10b of procedure B.
3f) Carefully position the CRT onto the coupler, using the outline defined in step 6b of procedure B as a reference.
4f) Start the CRT mounting ear screws but do not tighten them.
5f) Tighten the CRT mounting ear screws in a star pattern (like tightening lug nuts on the wheel of a car). Make sure the CRT does not shift position from the outline defined in step 6b.

Caution: Do not over tighten the CRT ear screws.

Note: The CRT mounting ear screws are not used on some assemblies.

6f) Install the CRT mounting bracket and start the four CRT mounting bracket bolts with springs.
7f) Tighten the bolts in a star pattern.
8f) Lay the CRT assembly on its side with the plug pointing up.
9f) Remove the plug.
10f) Using the PTV coupling fluid bottle with the cone top, refill the coupler with fluid through the drain access hole. Completely fill the coupler chamber so the fluid is level with the top of the coupler at the plug. Wipe any excess fluid from around the coupler.
11f) Reinstall the plug and check for any fluid leaks.
12f) Install the repaired CRT/optical block assembly into the PTV and perform any necessary adjustments.

HDR2002 Service Adjustments

Manual 7621
DPTV300 Series Chassis Adjustments

The following topics are covered:

- Service Modes
- Error code buffer and error codes
- The “blinking LED” procedure
- Trouble shooting tips
- Customer Service Mode

Measurements should be performed under the following conditions:
Video: color bar signal
Audio: 3kHz left, 1kHz right

Panel Location Guide

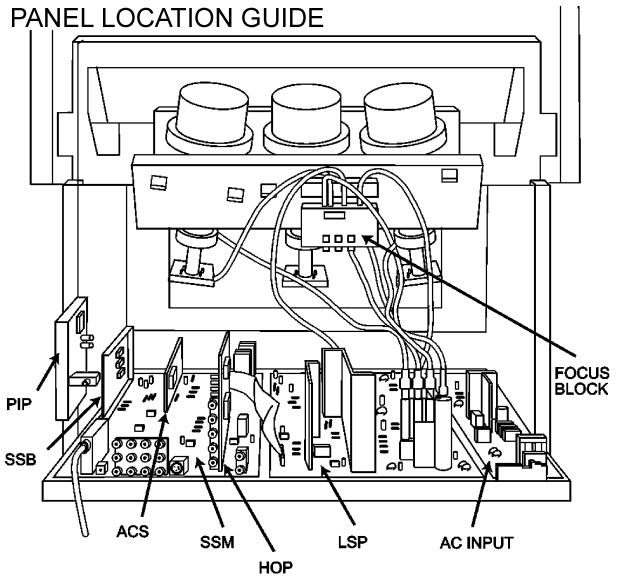

Voltage Checks

Display DPTV300 Series Voltage Diagram

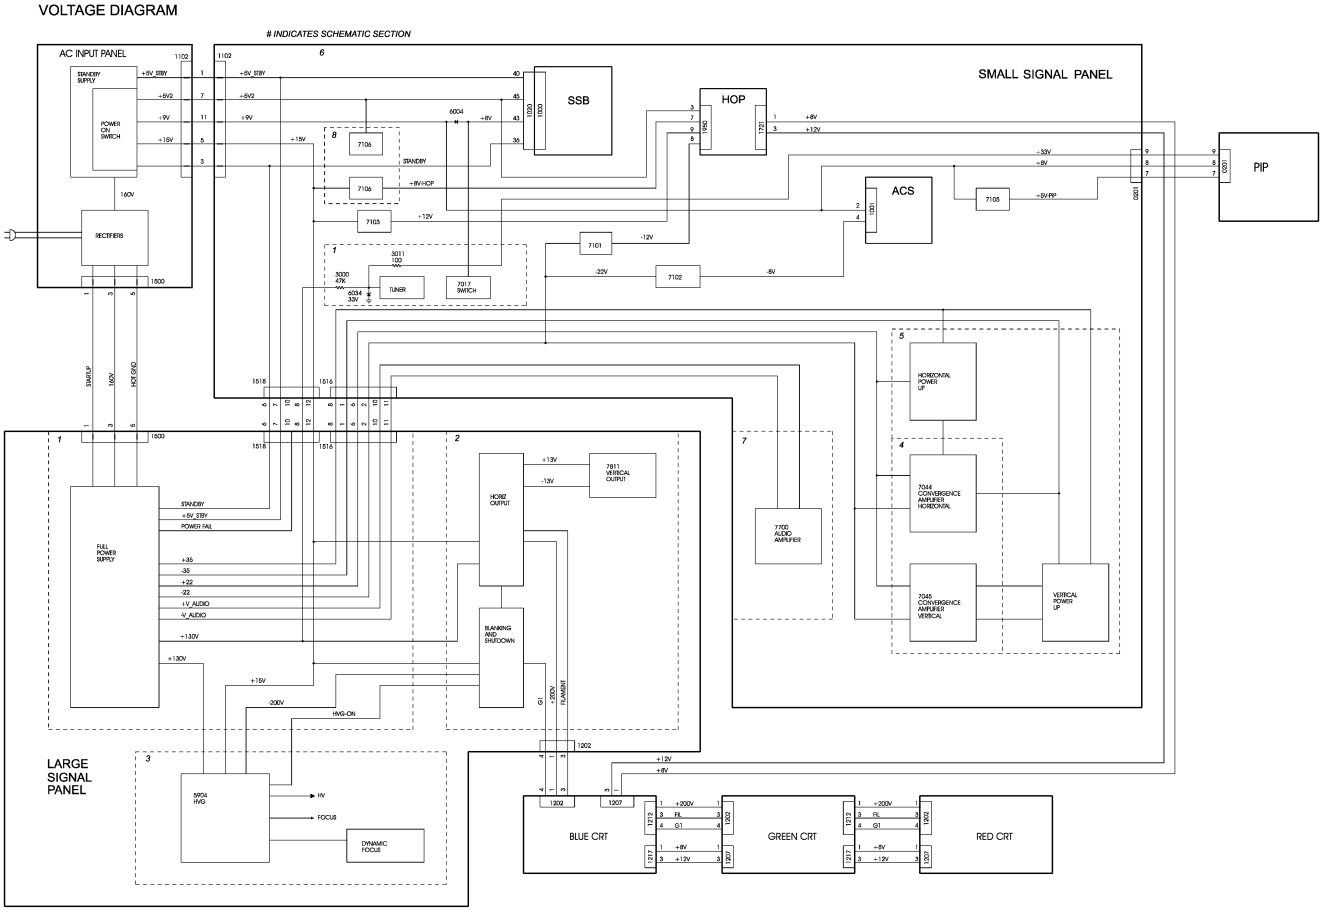

Service Default Mode (SDM)

Introduction

The **Service Default Mode** (SDM) is a technical aid for the service technician. The Service Default Mode (SDM) establishes fixed, repeatable settings of customer controls, which allow consistent measurements to be made. The SDM also initiates the blinking LED procedure and, if necessary, overrides the 5V protection.

The SDM places the set in the following pre-defined conditions:

- Tuning frequency set to channel 3.
- Volume level set to 25% (of the maximum volume level).
- Other picture and sound settings set to 50% (mid-range).

The following functions are turned OFF while in SDM:

- Timer
- Sleep timer

The following functions are disabled during SDM (and enabled after leaving SDM):

- Parental lock
- Blue mute
- Hospitality Mode
- No-ident Timer (normally the set is automatically switched off when no video signal (IDENT) is received for 15 minutes).

All other controls operate normally.

Entering Service Default Mode

To enter the Service Default Mode, press the following key sequence on the remote control transmitter:

0-6-2-5-9-6-MENU

Do not allow the display to time out between entries while keying the sequence.
Upon entry into the Service Default Mode, the letters “SDM” will be displayed at the upper right corner of the screen.

Display SDM Screen

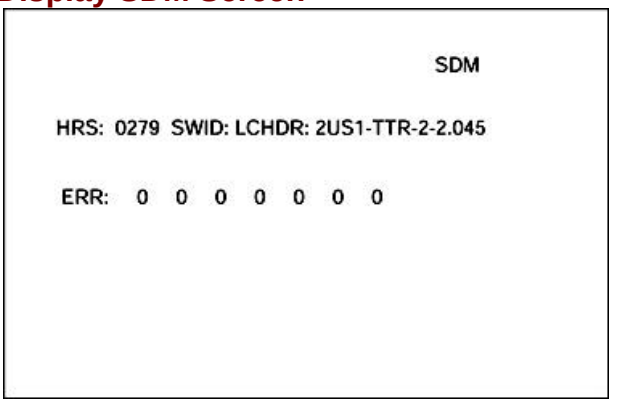

Special SDM functions

Access to normal user menu

Pressing the “MENU” button on the remote control switches between the SDM and the normal user menus (with the SDM mode still active in the background)

Run timer, software identification, and error buffer

Press the Status button on the remote control to toggle the OSD (except “SDM”) ON and OFF to prevent the OSD from interfering with measurements and oscilloscope waveforms.

Access to SAM

To access the Service Alignment Mode while in the SDM press the “VOLUME +” and “VOLUME –“ buttons on the local keyboard simultaneously for at least 4 seconds.

Exiting Service Default Mode

To exit the Service Default Mode, press the Power button.

Note: To save the error codes, unplug the AC power cord without turning off the set. When the power is turned back on, the Service Default Mode will still be active.

Service Alignment Mode (SAM)

Introduction

The Service Alignment Mode (SAM) is used to align the set and/or adjust the option settings and to display/clear the error code buffer values.

Entering Service Alignment Mode

To enter the Service Alignment Mode (SAM), press the following key sequence on the remote control transmitter:

0-6-2-5-9-6-STATUS

Do not allow the display to time out between entries while keying the sequence

It is also possible to enter the Service Alignment Mode by pressing the “VOLUME +” and “VOLUME -” key on the local keyboard simultaneously for at least 4 seconds when the set is in SDM.

Exiting SAM:

To exit the Service Alignment Mode, press the Power button.

Note: To save the error codes, unplug the AC power cord without turning off the set. When the power is turned back on, the Service Alignment Mode will still be active.

In SAM the following information is displayed on the screen:

Display SAM Menu

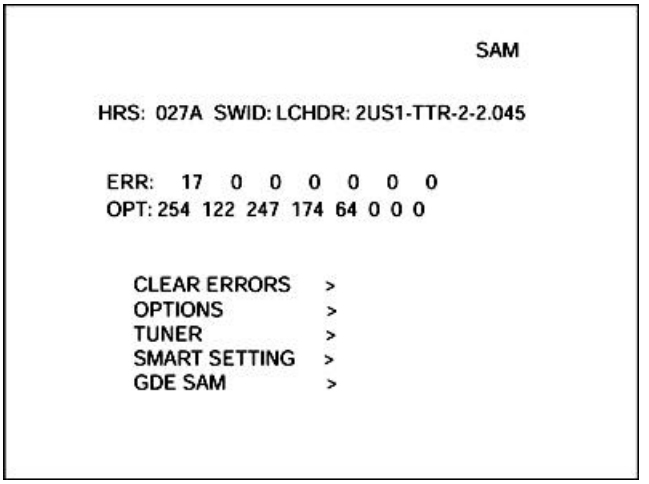
SAM
HRS: 027A SWID: LCHDR: 2US1-TTR-2-2.045
ERR: 17 0 0 0 0 0 0
OPT: 254 122 247 174 64 0 0 0
CLEAR ERRORS >
OPTIONS >
TUNER >
SMART SETTING >
GDE SAM >

Explanation of SAM Menu:

1	**Operation Hours (Run Timer):** This display indicates the accumulated total of operational hours. (Shown in hexadecimal format)
2	**Software identification of the main micro controller (2US1-2.045)** **LCHDR** is the engineering chassis name for the HDR2002-PTV chassis. · **US1** is 2 letter and 1 digit combination to indicate the software type and the supported languages: · **US** = NAFTA · **1** = Main Software language version number · 2**.045** = sub-version number
3	**Error buffer (7 errors possible):** Displays the 7 most recent errors. The most recent error is displayed at the upper left.
4	**Option bytes (8 codes possible):** Summary of options is explained below.
5	**Sub menus are listed in a scroll menu.**

SAM Menu Control

Menu items may be selected using the cursor UP/DOWN keys.

- the selected item will be highlighted.
- when not all menu items will fit on the screen, pressing the cursor UP/DOWN keys on the remote transmitter will display the next/previous menu items.

With the cursor LEFT/RIGHT keys, it is possible to:

- activate/deactivate the selected menu item (e.g. GEOMETRY)
- change the value of the selected menu item (e.g. VER-SLOPE)
- activate the selected submenu (e.g. SERV-BLK)

Access to normal user menu

Pressing the “MENU” button on the remote control switches between the SAM and the normal user menus (with the SAM mode still active in the background). Pressing the “MENU” key in a submenu will return the screen to the previous menu.

Menu and Sub-menu Definitions

Clear Errors

Erases the contents of the error buffer. Select the CLEAR ERRORS menu item and press the cursor LEFT or cursor RIGHT key. The contents of the error buffer are cleared.

The functionality of the OPTIONS and ALIGNMENTS (TUNER, WHITE TONE, GEOMETRY, SOUND, and SMART SETTING) sub-menus are described in the service adjustments.

Error code buffer and error codes

Explanation of the Error code buffer

The error code buffer contains all errors detected since the last time the buffer was erased. The buffer is written from left to right. When an error occurs that is not yet in the error code buffer, the error code will appear at the left side and all other errors shift one position to the right.

The error code buffer will be cleared in the following cases:

- by activating CLEAR ERRORS in SAM menu
- exiting SDM or SAM with the “Standby" command on the remote control
- upon automatic reset when content has not changed for 50 consecutive hours

By leaving SDM or SAM via the power switch, the error buffer will not be reset.

Examples:

ERROR: 0 0 0 0 0 0 0 : No errors detected
ERROR: 6 0 0 0 0 0 0 : Error code 6 is the last and only detected error
ERROR: 9 6 0 0 0 0 0 : Error code 6 was first detected and error code 9 is the last detected (newest) error

The contents of the error buffer can also be displayed by use of the “blinking LED” procedure, if no picture is available. See explanation of “The blinking LED procedure “below.

Error code definition

In case of non-intermittent faults, clear the error buffer before starting the repair. Make sure “old” error codes are not present. If possible check the entire content of the error buffers. In some situations an error code is only the result of another error code (and not the actual cause).
Note: A fault in the protection detection circuitry can also lead to a protection.

Error codes 1,2, 3, and 4 are protection codes, and in this case the supplies of some circuits will be switched off. Also in protection, the LED will blink the number of times equivalent to the most recent error code.

Error Code Table

Error number	Explanation	Valid for PEMG99	Addresses in HCS	Remarks
0	No error	X	X	
1	FBX 3V3 protection	X	X	
2	No Horizontal Flyback protection	X	X	GDE reported critical error HFB error
3	X-Ray protection **Significance changed to: GDE critical error – Vertical Output Failure**	X		Must have been supported by GDE. But it is not so. GDE reported critical error
4	+5V protection active (detected via MSP34xx & tuner)	X	X	
5	**HOP POR not successful**	X	X	GDE reported critical error – HOP Initialization Failure
6	General I^2C error main I^2C bus	X	X	
7	Mains Dip error **Significance changed to: GDE critical error – DAC Initialization failure**	X	X	Cannot be supported in HCS since the hardware supports. GDE reported critical error
8	3D Comb filter I^2C communication error	X	X	
9	Bocma IC TDA888xx 8V failure (SUP bit) **Significance changed to: HCS-GDE communication failure**		X	GDE did not communicate with Initialization complete message.
10	NVM IC STM24xxx I^2C communication failure	X	X	
11	New NVM IC error (NVM_ IDENTIFICATION_ERROR)	X	X	
12	Main uP (Painter) Internal RAM test failure	X	X	
13	Main tuner I^2C failure UV13xx	X	X	
14	Sound IC MSP34xx I^2C failure	X	X	
15	SRAM IC uPD431000A-B test failure	X	X	
16	PIP/DW Tuner (ETA50) I^2C failure	X	X	
17	PIP IC M65669SP I^2C failure or Double window IC SAB9081 I^2C failure	X	X	

18	I/O expander IC M62320P I^2C failure (DW & PIP)	X	X	
19	Guide+ I^2C failure	X	X	
20	V-chip for PIP, IC ZILOG 86130 I^2C failure (TBC)	X	X	
21	NV clock IC MK41T56 I^2C failure			
22	Flash protection (detected via Bocma)			
23	Bocma IC TDA888xx (on DW panel) I^2C communication	X	X	
27	Virtual Dolby error	X	X	
30	HIP I/O-video processing error	X	X	
31	Picnic	X	X	
32	HOP video control/geometry	X		
33	8v6	X		
34	Hikup protection	X		
35	HD interface I/O expander M62320 I^2C failure	X		
1.	**New Error codes for LCHDR**			
101	No Ack or response from GDE for the transmitted message even after maximum no. of retries		X	Unrecoverable error for transmissions
102	HCS encountered errors on MAX RETRY consecutive received messages		X	Unrecoverable errors on reception
103	Sony A/V Switch I^2C communication failure		X	I^2C communication on interaction with Sony A/V switch
104	GDE non-critical error		X	GDE reported non-critical error on - 1 Am Alive message
105	Change Display Config Exit did not occur		X	HCS did not receive the Display Config Exit command From GDE within 2s from Change Display Config Enter command sent.
106 to 119	Reserved for future error codes		X	

Table 1 LCHDR error codes for US cluster

The Blinking LED Procedure

The contents of the error buffer can also be made visible through the “blinking LED” procedure. This is especially useful when there is no picture.

- When the SDM is entered, the LED will blink the number of times equal to the value of the error code. Error-codes equal to or greater10 are shown in the following manner: A long blink of 750 mSeconds indicating the decimal digit, followed by a pause of 1500 mSeconds. The LED will then blink the number equal to the error code. When all error-codes are displayed, the sequence is finished with an LED display of 3 seconds. At this point the sequence will begin again.

Example:

Error code position	1	2	3	4	5
Error buffer:	12	9	6	0	0

- After entering SDM: The sequence will begin with 1 long blink of 750 mSeconds, then pause 1500 mSeconds, then blink twice (indicating error code 12), then the LED will pause for 3 seconds, then blink 9 times (indicating error code 9), then the LED will pause for 3 seconds, then blink 6 times (indicating error code 6), then pause 3 seconds and blink for 3 seconds again, ending the blinking sequence.

NOTE: If errors 1, 2, 3, or 4 occur the LED ALWAYS blinks indicating the last error which occurred, even if the set is NOT in service mode.

Option Codes - NAFTA

Bits	Basic 2US1		Basic W		Basic+ 2US2		Core 2US3		Basic+ 2US4	
7	SBNP	1	SBNP	1	SBNP	1	SBNP	1	SBNP	1
6	CVI	1	CVI	1	CVI	1	CVI	1	CVI	1
5	C169	1	C169	1	SMCK	1	C169	0	SMCK	1
4	E149	1	E149	1	AV3	1	E149	0	AV3	1
3	SMCK	1	SMCK	1	CBFL	1	SMCK	1	CBFL	1
2	AV3	1	AV3	1	IPIX	0	AV3	1	IPIX	0
1	CBFL	1	CBFL	1	IPMU	0	CBFL	1	IPMU	0
0	IPIX	0	IPIX	0	VDBY	1	IPIX	0	VDBY	1
	OB1=	**254**		**254**		**249**		**206**		**249**
7	IPMU	0	IPMU	0	PLST	1	IPMU	0	PLST	1
6	VDBY	1	VDBY	1	SOSD	1	VDBY	1	SOSD	1
5	PLST	1	PLST	1	PIPC	1	PLST	1	PIPC	1
4	SOSD	1	SOSD	1	PIPT	1	SOSD	1	PIPT	1
3	PIPC	1	PIPC	1	PIPF	1	PIPC	1	PIPF	1
2	PIPT	0	PIPT	0	VSLC	0	PIPT	1	VSLC	0
1	PIPF	1	PIPF	1	SURF	1	PIPF	1	SURF	1
0	VSLC	0	VSLC	0	CCAP	1	W4X3	1	CCAP	1
	OB2=	**122**		**122**		**251**		**127**		**251**
7	SURF	1	SURF	1	TIME	1	VSLC	0	TIME	1
6	CCAP	1	CCAP	1	AAVL	1	SURF	1	AAVL	1
5	TIME	1	TIME	1	FUNN	0	CCAP	1	FUNN	0
4	AAVL	1	AAVL	1	SPKC	1	TIME	1	SPKC	1
3	FUNN	0	FUNN	0	VCBK	1	AAVL	1	VCBK	1
2	SPKC	1	SPKC	1	VBNR	1	FUNN	0	VBNR	1
1	VCBK	1	VCBK	1	BNUM	1	SPKC	1	BNUM	1
0	VBNR	1	VBNR	1	TMWIN	0	VCBK	1	TMWIN	0

	OB3=	**247**		**247**		**222**		**123**		**222**	
7	BNUM	1	BNUM	1	AOUT	1	VBNR	1	AOUT	1	
6	TMWIN	0	TMWIN	0	INCF	0	BNUM	1	INCF	0	
5	AOUT	1	AOUT	1	APC	1	TMWIN	0	APC	1	
4	INCF	0	INCF	0	PAGC	1	AOUT	1	PAGC	1	
3	APC	1	APC	1	INIT TIME OUT	1	INCF	0	INIT TIME OUT	1	
2	PAGC	1	PAGC	1	I AM ALIVE	0	APC	1	I AM ALIVE	0	
1	WSCR	0	WSCR	1	ACS	0	PAGC	1	ACS	0	
0	INIT TIME OUT	1	INIT TIME OUT	1	MCS	1	WSCR	1	MCS	1	
	OB4=	**173**		**175**		**185**		**215**		**185**	
7	I AM ALIVE	0	I AM ALIVE	0	AV5	1	INIT TIME OUT	1	AV5	1	
6	ACS	0	ACS	0	DVI	0	I AM ALIVE	0	DVI	0	
5	MCS	1	MCS	1	WDT	1	ACS	1	WDT	1	
4	AV5	0	AV5	1	CFMU	1	MCS	1	CFMU	1	
3	WDT	1	WDT	1		0	AV5	1		0	
2		0		0		0	DVI	1		0	
1		0		0		0	WDT	1		0	
0		0		0		0	CFMU	1		0	
	OB5=	**40**		**56**		**176**		**191**		**176**	
	OB6=	**0**		**0**		**0**		**0**		**0**	
	OB7=	**0**		**0**		**0**		**0**		**0**	
	OB8=	**0**		**0**		**0**		**0**		**0**	

Option Setting	**Basic 2US1**	**Basic W**	**Basic+ 2US2**	**Core 2US3**	**Basic+ 2US4**	
AAVL	1	1	1	1	1	Auto Volume Level via Sound Menu
ACS	0	0	0	1	0	Auto Convergence
AOUT	1	1	1	1	1	Audio Out
APC	1	1	1	1	1	Auto Picture Control
AV3	1	1	1	1	1	Side AV Source
AV5	0	1	1	1	1	
BNUM	1	1	1	1	1	Numerics Displayed in Menus
C169	1	1	NA	0	NA	Compress 16:9 mode available
CBFL	1	1	1	1	1	Comb Filter Present
CCAP	1	1	1	1	1	Closed Caption
CFMU	NA	NA	1	1	1	Comb Filter Menu Item
CVI	1	1	1	1	1	Component Video Input
DVI	NA	0	0	1	0	Digital Video Input
E149	1	1	NA	0	NA	Expand 14:9 mode available
FUNN	0	0	0	0	0	Fine Tuning Menu Item
I AM ALIVE	0	0	0	0	0	I am Alive Message (on Time-Out take set to Protection)
INCF	0	0	0	0	0	Internal Comb Filter Present
INIT TIME OUT	1	1	1	1	1	Initialization Time Out (on Time-Out take set to Protection)
IPIX	0	0	0	0	0	Incredible Picture Feature
IPMU	0	0	0	0	0	Incredible Picture Menu Item
MCS	1	1	1	1	1	"Manual Convergence" Feature in Customer Mode
PAGC	1	1	1	1	1	Painter AGC
PIPC	1	1	1	1	1	PIP Control (PIP is present)

PIPF	1	1	1	1	1	PIP Function
PIPT	0	0	1	1	1	PIP Tuner
PLST	1	1	1	1	1	Program List
SBNP	1	1	1	1	1	Auto Standby with No Picture
SMCK	1	1	1	1	1	Smart Clock
SOSD	1	1	1	1	1	Smart OSD
SPKC	1	1	1	1	1	Speaker Control
SURF	1	1	1	1	1	Surf Feature available
TIME	1	1	1	1	1	Time Feature available via Features menu
TMWIN	0	0	0	0	0	Time Window
VBNR	1	1	1	1	1	V-Chip Block No Rated Menu
VCBK	1	1	1	1	1	V-Chip Block Un Rated Menu
VDBY	1	1	1	1	1	Virtual Dolby Enabled (MSP3451 required)
VSLC	0	0	0	0	0	Vertical Slicing Enabled
W4X3	NA	NA	NA	1	NA	Double Window 4x3 format
W169	NA	NA	NA	NA	NA	Double Window 16x9 format
WDT	1	1	1	1	1	Watch Dog Timer
WSCR	0	1	NA	1	NA	Wide Screen Set (16:9)

Tuner Options

Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter: **0-6-2-5-9-6-STATUS**
Do not allow the display to time out between entries while keying the sequence
It is also possible to enter the Service Alignment Mode by pressing the “VOLUME +” and “VOLUME -” key on the local keyboard simultaneously for at least 4 seconds when the set is in SDM.

The option menu below shows the option bytes for different clusters. It shows the default values as set by the PEMG for US clusters:

Item	2US1, 2, 3, 4	Remarks
IF-PLL OFFSET	P	Range 0->127 (Typically 87)
AGC	P	Range 0->63 (Typically 22)
AFA	P	0 or 1 (Read Only)
AFB	P	0 or 1 (Ready Only)

Smart Settings

Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter: **0-6-2-5-9-6-STATUS**
Do not allow the display to time out between entries while keying the sequence in.
It is also possible to enter the Service Alignment Mode by pressing the “VOLUME +” and “VOLUME -” key on the local keyboard simultaneously for at least 4 seconds when the set is in SDM.

Item	2US1, 2, 3, 4	Remarks	Typical Settings
MOVIE BGT	P	Movie Brightness 0-99	50
MOVIE COL	P	Movie Color 0-99	50
MOVIE PIC	P	Movie Picture 0-99	50
MOVIE SHP	P	Movie Sharpness 0-99	84
MOVIE HUE	P	Movie Hue 0-99	0
MOVIE 2FH SHP	P	Movie Sharpness 0-99 for 2fh source	84
SPORT BGT	P	Sport Brightness 0-99	50
SPORT COL	P	Sport Color 0-99	59
SPORT PIC	P	Sport Picture 0-99	54
SPORT SHP	P	Sport Sharpness 0-99	70
SPORT HUE	P	Sport Hue 0-99	0
SPORT 2FH SHP	P	Sport Sharpness 0-99 for 2fh source	70
WEAK BGT	P	Weak Brightness 0-99	50
WEAK COL	P	Weak Color 0-99	40
WEAK PIC	P	Weak Picture 0-99	40
WEAK SHP	P	Weak Sharpness 0-99	28
WEAK HUE	P	Weak Hue 0-99	0
WEAK 2FH SHP	P	Weak Sharpness 0-99 for 2fh source	28
MULTI BGT	P	Multimedia Brightness 0-99	50
MULTI COL	P	Multimedia Color 0-99	40
MULTI PIC	P	Multimedia Picture 0-99	40
MULTI SHP	P	Multimedia Sharpness 0-99	70
MULTI HUE	P	Multimedia Hue 0-99	0
MULTI 2FH SHP	P	Multimedia Sharpness 0-99 for 2fh source	70

GDE SAM MODE DEFAULTS TABLES

GDE SAM	REGISTER NAME	DEFAULT VALUE	DEFAULT VALUE	DEFAULT VALUE
DISPLAY MODE		480p	1080i FULL	1080i COMP
SERV BLANK		OFF	OFF	OFF
GEOMETRY	WIDE BLANK	7	7	7
	HOR SHIFT	23	21	21
	HOR. PARALLEL	8	8	8
	EW. WIDTH	29	42	42
	EW. PARA	36	36	31
	EW. TRAP	31	31	31
	HOR. BOW	7	7	7
	VER. SLOPE	40	36	38
	VER. AMPL	38	37	11
	S CORR	31	31	31
	VER. SHIFT	31	31	31
	FAST BLANK	0	0	0
PICTURE	BRIGHTNESS	31	31	31
	PICTURE	31	31	31
	COLOR	31	31	31
	TINT	31	31	31
	SHARPNESS	31	31	31
	SUB-BRIGHT	31	31	31
WHITE TONE	NORMAL CUTOFF RED	35	35	35
	NORMAL CUTOFF GREEN	34	34	34
	NORMAL CUTOFF BLUE	31	31	31
	NORMAL DRIVE RED	20	20	20
	NORMAL DRIVE GREEN	43	43	43
	NORMAL DRIVE BLUE	31	31	31
	COOL CUTOFF RED	0	0	0
	COOL CUTOFF GREEN	0	0	0
	COOL CUTOFF BLUE	0	0	0
	COOL DRIVE RED	-7	-7	-7
	COOL DRIVE GREEN	-6	-6	-6
	COOL DRIVE BLUE	0	0	0
	WARM CUTOFF RED	0	0	0
	WARM CUTOFF GREEN	0	0	0
	WARM CUTOFF BLUE	0	0	0
	WARM DRIVE RED	+7	+7	+7
	WARM DRIVE GREEN	+4	+4	+4
	WARM DRIVE BLUE	-6	-6	-6
CLAMP PULSE		NORMAL	HDTV	HDTV
CONV. PROC.		ENABLED	ENABLED	ENABLED

ELECTRICAL FOCUS ADJUSTMENT

Note: Before beginning the following adjustment procedures set the customer picture, sharpness, brightness, and tint controls to midrange and the customer color control to minimum.

Electrical Focus Adjustment

1. Remove the back cover of the set and the light shield, then turn the set on and inject an NTSC crosshatch pattern signal into the antenna terminal.

Note: The crosshatch pattern will appear clearer if the front of the screen is covered with a dark cloth.

2. Cover two of the CRT output lenses with cardboard pieces (or other non-conductive opaque material) to observe the magnified reflection of the other picture tube on the back side of the viewing screen.
3. Adjust the CRT's focus control (located on the Screen/Focus Control Block) for the sharpest raster image.
4. Confirm correct focus by viewing the screen from the front of the set.
5. Repeat steps two through four to adjust the focus of the two remaining CRT's.

Note: Before beginning the following adjustment procedures, set the customer picture, sharpness, brightness, and tint controls to midrange and the customer color control to minimum.

OPTICAL FOCUS

1. Remove the back cover of the set and the light shield, then turn these on and inject an NTSC crosshatch pattern signal into the antenna terminal.
   Note: The crosshatch pattern will appear clearer if the front of the screen is covered with a dark cloth.
2. Cover tow of the CRT output lenses with cardboard pieces (or other non-conductive, opaque material) and observe the magnified reflection of the other picture tube on the back side of the viewing screen.
3. Loosen the lens retaining wing nuts on the CRT Focus Assembly.
4. Move the wing nut in the slot of the uncovered lens to locate the optimum optical focus (viewing the picture from the back side of the screen), then re-tighten the wing nut.
5. Confirm correct focus by viewing the screen from the front of the set.
6. Repeat steps two through five to adjust the focus of the two remaining CRT's.

Picture Tube Replacement

Replacement of the cathode ray tube (CRT) and/or optical system components of a Projection TV (PTV) can be easily accomplished by following general guidelines. Use care when working around the CRT and optical systems of the PTV. The PTV light path encompasses a number of precision optical components. These include lenses, mirrors, the lenticular screen, and fresnel lens. The PTV incorporates three separate CRTs, representing green, red, and blue outputs. Each CRT uses an independent deflection/convergence yoke, magnetic centering ring, coupler, C-element lens, and output lens (A/B lens). Each tube is mechanically fastened to a coupler which houses fluid (a glycol-type substance) used to cool the high temperatures generated by the small (7") CRTs. The fluid also provides an optical characteristic supporting the optical system of the PTV. When replacement of a CRT or optical component is required, caution must be exercised in preventing fluid spillage. The technician must carefully reassemble the CRT/optical components, ensuring a proper seal of the coupling fluid. Use only factory original coupling fluid.

Caution: Do not use or add water as an alternative to the prescribed coupling fluid.

The following procedure should be used when performing repairs on the CRT/optical assemblies of the Projection TV.

Note: Upon completion of CRT/optical assembly repair, the centering, convergence, gray scale, mechanical and electrical focus adjustments are required. If more than one assembly requires repair, it is recommended the service technician fully complete one assembly at a time, using the existing assemblies as a reference for the alignment of the centering and convergence.

Disassembly Procedures

A. Removal of a single CRT/Lens Assembly from the light rack

1a) Remove AC power from the PTV.

2a) Remove the upper and lower back covers (1/4" screws).

3a) Remove the barrier board and the shield cover from around the lens assemblies (1/4" screws).

4a) Carefully remove the CRT Socket Board from the CRT of the CRT/optical assembly being serviced.

5a) Remove the yoke and convergence plugs, of the CRT/optical assembly being serviced, from the Large Signal Module.

6a) Remove the high voltage anode lead from the HV splitter block on the Large Signal Module of the CRT/optical assembly being serviced. Remove ground lug connectors from the coupler frame.

7a) Remove the four 1/4" screws that secure the CRT/lens assembly to the light rack. These four screws are located in each corner, on the top of the coupler assembly.

Caution: Do not remove the bolts with pressure springs or the inverted Torx screws of the CRT/lens assembly. The removal of these components could result in fluid spillage into the PTV cabinet.

8a) Carefully remove the CRT/lens assembly from the PTV cabinet.

Servicing the CRT/Optical Assembly

Caution: Do not attempt any repairs on the CRT/optical block assembly without first removing the CRT coupling fluid. Removal of the delta output lens will result in spillage of the coupling fluid.

Caution: Coupling fluid is a poisonous solution containing a high concentration of ethylene glycol. Do not leave exposed fluid unattended. Prevent children or pets from coming into contact with the fluid. Clean up spills immediately.

B. Removing the PTV Coupling Fluid

All repairs made to the CRT/optical block assembly require the removal of the coupling fluid. The following procedure describes how to remove the PTV coupling fluid.

1b) Lay the CRT assembly on its side with the plug pointing up.

2b) Remove the plug (X8).

3b) Remove some of the fluid from the coupler to prevent spillage when the CRT is removed. An empty coupling fluid bottle with a cone top is recommended to lower the fluid level within the coupler. Squeeze and hold the bottle and insert the tip of the cap into the drain hole of the coupler. Loosen the grip on the bottle, allowing the fluid to be pulled up into the bottle. Save the fluid.

4b) Reinstall the plug (X8).

5b) Stand the CRT assembly up with the neck of the CRT pointing up.

6b) With an awl or marking pen, outline the edges of the CRT onto the coupler.

Note: The correct positioning of the CRT to the coupler is critical to the optimum performance of the optical system.

7b) Remove the four CRT mounting bolts (A) (with springs and spacers) and remove the mounting bracket (D).

8b) Remove the four CRT mounting ear screws.

Note: The CRT mounting ear screws are not used on some assemblies.

9b) Gently remove any metal shavings from around the screw holes. Do not allow the metal shavings to get into the fluid.

10b) Note the position of the high voltage anode cap with respect to the coupler.

11b) Carefully remove the CRT from the coupler. Wipe any excess fluid from the faceplate of the CRT. Set the CRT aside.

12b) Use an empty coupling fluid bottle to extract the remainder of the fluid from the coupler.

Note: Complete removal of the coupling fluid is not necessary when only replacing the CRT.

13b) Clean any remaining fluid from the coupler and the CRT gasket channel using absorbent tissue. Refer to "C". Cleaning the Coupler, C-element Lens and CRT Faceplate procedure if the fluid is discolored or contaminated.

14b) Make all necessary repairs.

C. Cleaning the Coupler, C-element Lens and CRT Faceplate

1c) Remove CRT coupling fluid as described in steps 1b through 13b.

2c) Using denatured alcohol on a cloth made of 100% cotton or a lens cleaning tissue, gently clean the C-element (fisheye) lens, coupler and the CRT faceplate. Thoroughly clean the coupler assembly, including the expansion chamber bladder, and allow to fully dry.

Caution: Do not use soap or detergent type substances to clean the coupler and its related assemblies. Water can be used as an alternative to denatured alcohol, but the assemblies must be completely dry prior to reassembly of the coupler and the addition of the coupling fluid. A hair dryer may be used to dry the coupler and its assemblies prior to reassembly. If contaminated fluid is discovered, the coupler and its related assemblies must be completely disassembled and cleaned to prevent a reoccurrence.

3c) Replace the CRT and C-element lens gaskets.

4c) Reassemble the C-element lens and the output lens to the coupler.

5c) Refer to "Replacing the CRT Coupling Fluid" upon completion of necessary repairs and cleaning of the optical/coupler assemblies.

D. Replacement of the CRT

1d) Remove CRT coupling fluid as described in steps 1b through 13b.

2d) Remove the plastic protective coating (if present) from the faceplate of the replacement CRT.

3d) Refer to "Replacing the CRT Coupling Fluid" to complete the CRT replacement.

E. Repair or Replacement of the Optical/Coupler Assembly

1e) Remove CRT coupling fluid as described in steps 1b through 13b.

2e) Remove the four inverted-type Torx screws which secure the Delta output lens to the coupler. An inverted-type Torx socket can be purchased using part number 483539517303.

3e) Removal of the Delta output lens will allow access to the C-element lens, C-element gasket, coupler, and its assemblies.

4e) Refer to "Replacing the CRT Coupling Fluid" upon completion of necessary repairs to the optical/coupler assemblies.

F. Replacing the PTV Coupling Fluid

Note: Prior to replacing the CRT coupling fluid, ensure the expansion chamber bladder is fully collapsed. This can be easily inspected by viewing the bladder through the small hole on the expansion chamber assembly. If the rubber of the bladder is not easily visible through the small hole, then the bladder may be considered collapsed and fluid can be added. If the rubber of the expansion chamber bladder is visible at the hole of the expansion chamber, then replacement of the expansion chamber bladder is required.

Note: The CRT coupling fluid is critical to the optical performance of the PTV. Use only part number 483531057233 (3 bottle kit) or 483531067004 (1 bottle) to ensure the optical integrity and performance reliability of the PTV when replacing the CRT coupling fluid.

1f) Reinstall the CRT gasket into the gasket channel of the coupler. Confirm the placement of the CRT, C-element lens, and vent plug gaskets.

2f) Place the CRT onto the coupler with the high voltage anode lead positioned as marked in step 10b of procedure B.

3f) Carefully position the CRT onto the coupler, using the outline defined in step 6b of procedure B as a reference.

4f) Start the CRT mounting ear screws but do not tighten them.

5f) Tighten the CRT mounting ear screws in a star pattern (like tightening lug nuts on the wheel of a car). Make sure the CRT does not shift position from the outline defined in step 6b.

Caution: Do not over tighten the CRT ear screws.

Note: The CRT mounting ear screws are not used on some assemblies.

6f) Install the CRT mounting bracket and start the four CRT mounting bracket bolts with springs.

7f) Tighten the bolts in a star pattern.

8f) Lay the CRT assembly on its side with the plug pointing up.

9f) Remove the plug.

10f) Using the PTV coupling fluid bottle with the cone top, refill the coupler with fluid through the drain access hole. Completely fill the coupler chamber so the fluid is level with the top of the coupler at the plug. Wipe any excess fluid from around the coupler.

11f) Reinstall the plug and check for any fluid leaks.

12f) Install the repaired CRT/optical block assembly into the PTV and perform any necessary adjustments.

Convergence and Geometry adjustments

Completely read the Setup section before proceeding with any adjustment. The set should be allowed to warm up for at least 20 minutes before any adjustments are made.

Introduction

There are six new screen sizes for the High Definition Ready sets for the 2002 model year.

Model	Chassis	Screen Size	Aspect Ratio	Template Used	Type
43PP9202	DPTV305	43"	4x3	ST4177	Basic
50PP9202	DPTV305	50"	4x3	ST4178	Basic
55PP9352	DPTV320	55"	16x9	ST4181	Core
55PP9502	DPTV315	55"	16x9	ST4181	Basic
60PP9202	DPTV305	60"	4x3	ST4179	Basic
60PP9502	DPTV315	60"	16x9	ST4182	Core
60PP9352	DPTV310	60"	16x9	ST4182	Basic
46PP9302	DPTV330	46"	16x9	ST4180	Basic

All of these sets incorporate a Digital Convergence system using 208 adjustment points. The Convergence Processor is located on the ACS (Automatic Convergence System) module. The Convergence drive circuits are located on the SSP (Small Signal Panel). Data for the Convergence settings are stored in the EEPROM located on the ACS module. Data for Geometry is stored in the EEPROM located on the Small Signal Board (SSB). If the CRTs, the Large Signal Panel (LSP), or the Small Signal Board (SSB) are changed, a complete Geometry and Convergence alignment will be necessary. If the ACS module, the Small Signal Panel (SSP), or CRTs are changed, a complete Convergence alignment will be necessary**. To obtain the correct Geometry during Convergence, a template must be used.**

The 4x3 Aspect ratio sets have three Convergence and Geometry settings. The 16x9 Aspect ratio sets have two Convergence and Geometry settings. The 4x3 Aspect ratio sets have a 480p mode, a 1080i full screen mode, and a 1080i Compressed mode. There are Geometry and Convergence settings for each mode.

There are two chassis versions: Basic, and Core. The Core version is equipped with an Automatic Convergence system called Intellisense. The Intellisense system makes minor changes in the Convergence to compensate for changes in the magnetic field from one location to another. In the Convergence procedure, both versions have the setup for the Intellisense sensors. If "Test Sensors" is selected in the basic version, a message will appear on the screen indicating that the sensors are not working. **In the Basic version, the results of the sensor test are not applicable.**

When performing convergence or geometry alignments, the correct signal must be applied to the set. This is necessary to provide the correct horizontal and vertical sync to the Convergence Circuits. Failure to do so will result in an out of Convergence picture when the customer applies the correct signal to the set.
A NTSC signal should be used when adjusting the 480p mode. A 1080i signal should be applied to the set when using the HD mode. The HD should have a horizontal frequency of 33.75kHz and a vertical frequency of 60Hz. There are two Geometry and Convergence alignments in the HD mode for the 4x3 aspect ratio set. The two modes are a full screen mode (4x3) and a (16x9) compressed mode. These can be selected in the customer menu.

This adjustment procedure is divided into the following sections:

Screen Centering
Geometry Alignment
Convergence Alignment
Grey Scale Alignment

If the ACS module has been replaced, the following adjustment should be performed in the order listed:

Geometry
Convergence
Grey Scale

If the Large Signal Board (LSB) has been changed:

Screen Centering
Geometry
Convergence

If the CRTs have been changed:

Screen Centering
Geometry
Convergence
Grey Scale

If the SSM (Small Signal Module) has been changed:

Convergence

Screen Centering

After replacing the CRTs, it will be necessary to perform Screen Centering. Place the Convergence Template on the TV screen or place a string from corner to corner to determine the screen center. Apply a center cross pattern to the TV. Enter the SAM mode, described in the Geometry section and disable Convergence. Cover the Red and Blue CRTs. Using the Centering rings on the Green CRT, center the cross onto the center of the template. Uncover the Red CRT and center the Red onto the Green cross. Follow the same procedure with the Blue CRT. Only perform the Screen Centering for the first mode to be adjusted. Do NOT repeat the adjustment for the other modes.

Geometry Alignment

The Geometry alignment data is stored in the NVM located on the ACS module. Whenever the ACS module or the Large Signal Board (LSB) has been changed, a Geometry alignment will be necessary. The Geometry Alignment is performed in the SAM/GDE alignment mode. To enter the SAM mode, press 0, 6, 2, 5, 9, 6, Index on the Remote Control. Make sure the set is in the mode in which you wish to align before entering the SAM mode. Use the AV button on the Remote to select the input with a signal applied after entering the SAM mode. The following screen will appear after entering the SAM mode. Press the Cursor Down key on the Remote to view SMART SETTINGS and GDE SAM.

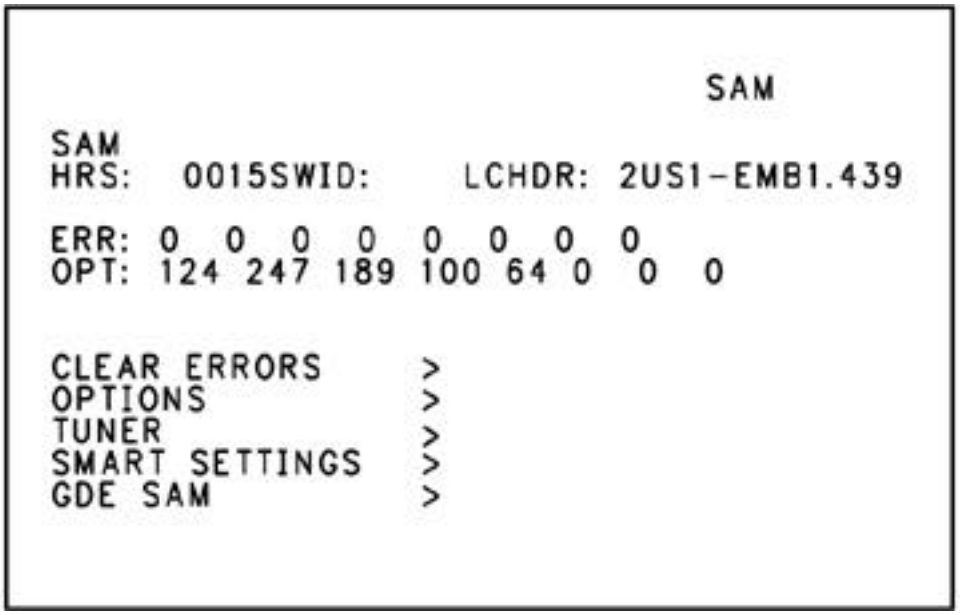

Geometry settings are located in the GDE SAM mode. Press the Cursor down button to highlight the GDE SAM then press the Right Cursor button to select. The following menu will appear:

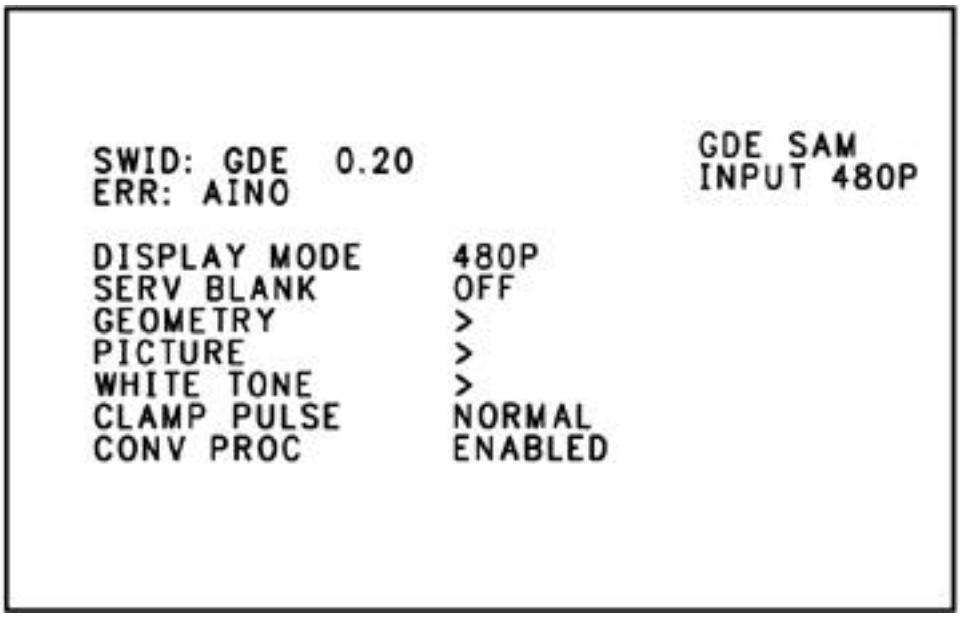

If the CRTs have been replaced, a Screen Centering adjustment will be necessary. Apply a crosshatch pattern to the set. Cursor Down to CONV PROC in the menu and press the Right Cursor button to select. This will disable the Convergence drive. Select Geometry in the menu and enter the following default values for the mode being adjusted. Other mode values can be entered by selecting a different DISPLAY MODE in the menu. In most cases, no additional adjustment will be necessary.

Geometry Default Values

	Mode 1 480p	Mode 2 1080i	Mode 3 1080i, Comp
Wide blank	7	7	7
Horizontal Shift	24	21	21
Horizontal Para	8	8	8
E-W Width	31	44	44
E-W Para	45	45	45
E-W Trap	31	31	31
Horizontal Bow	7	7	7
Vertical Slope	40	33	33
Vertical Amp	40	40	12
S Correction	31	31	31
Vertical Shift	31	31	31
Fast Blank	0	1	1

To exit the Service Alignment Mode (SAM), press the Menu key to return to the main SAM menu. Then turn the set Off.

Convergence Alignment

To enter the Convergence Alignment mode, press 0, 6, 2, 5, 9, 7, Index on the Remote Control. Listed below is a map of the Convergence menus. Make sure that a signal is applied to the set for the mode being adjusted. Make sure that the set is in the mode you wish to adjust before entering the Convergence Alignment mode.

Convergence Menu Flow Diagram

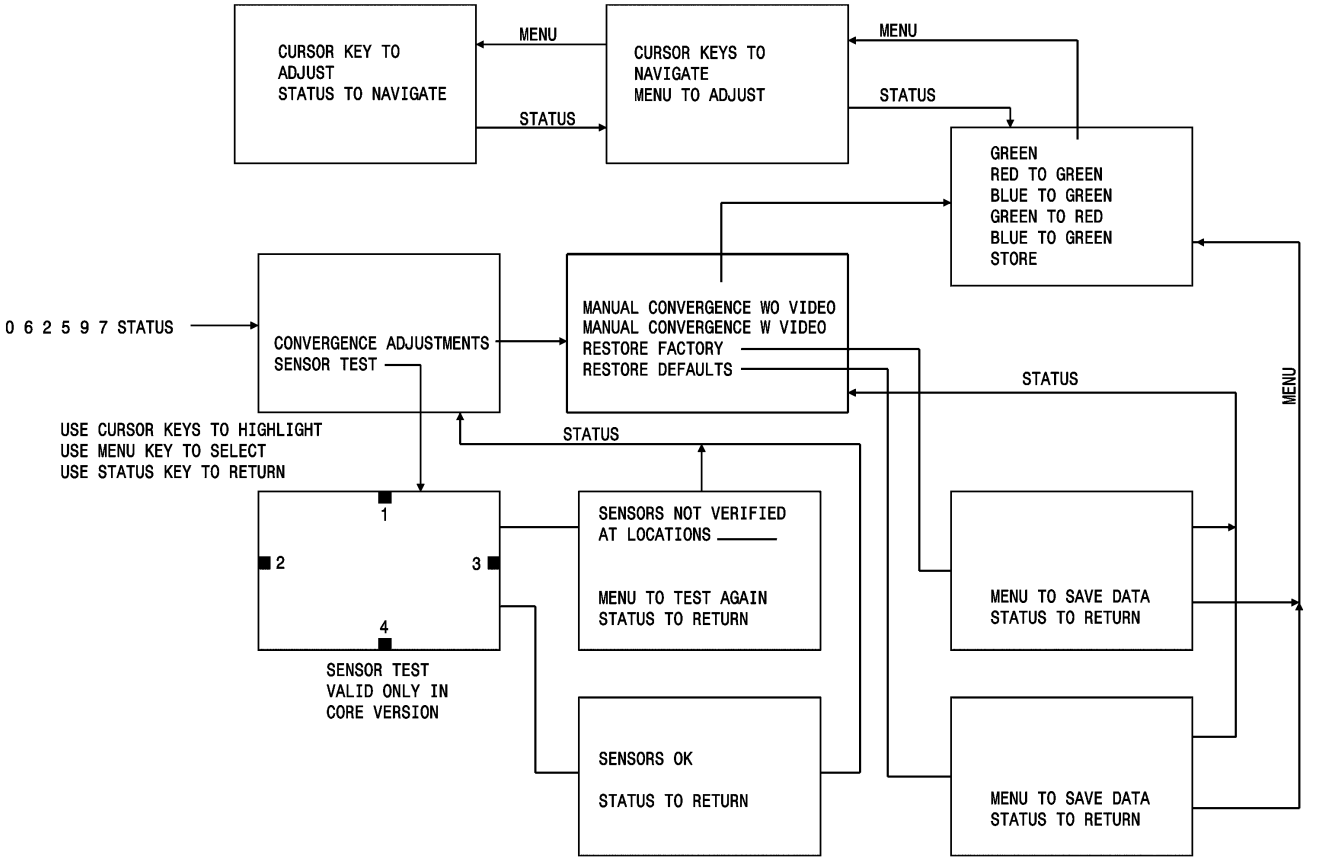

Use the Cursor Up-Down button to highlight the selection. Press the Cursor Right button to make the selection. In the second menu, MANUAL CONVERGENCE WO VIDEO means that the screen behind the adjustment grid will be blank. MANUAL CONVERGENCE W VIDEO displays the applied video behind the adjustment grid. RESTORE FACTORY loads the values from the last saved convergence alignment. RESTORE DEFAULT loads values from the ROM on the ACS Microprocessor. If the ACS module has been changed, there may not be data in the NVM for RESTORE FACTORY. The RESTORE DEFAULT settings will then be loaded. Loading default values will overwrite all of the Convergence modes.

A internally generated grid will be displayed in the Convergence mode as shown below. The shaded area is the screen area. Horizontal lines A and M are displayed on the top and bottom edge of the visible screen area. Lines 1 and 15 are also displayed on the left and right edge of the visible screen area. Vertical line 0 is adjustable, but not visible.

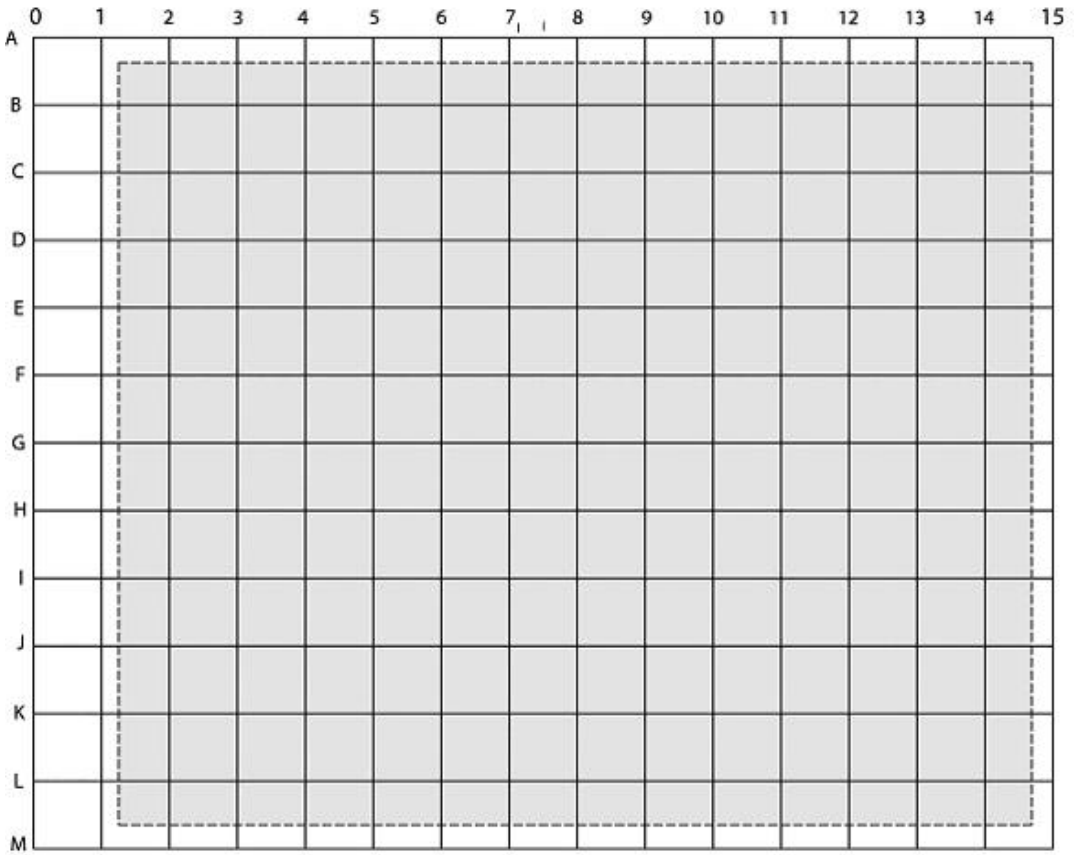

Green Geometry

The Green Geometry must be done first when performing a complete convergence alignment. A Screen Template is necessary to obtain the correct geometry. Failure to use the Screen Template or misalignment of the convergence will result in reduced life of the Convergence amplifiers.

Place the Screen template on the TV screen. Select GREEN in the selection menu. The Cursor will appear in the center of the screen as shown below.

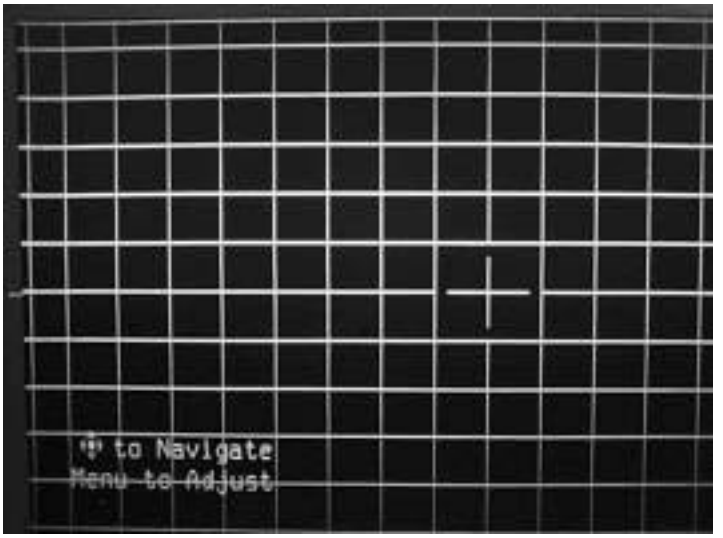

When the ACS module has been replaced and Default settings have been loaded, the following procedure should be used to adjust the convergence. Otherwise use the Cursor Up-Down and Right-Left buttons to Navigate to the area to be adjusted. Press the Menu button to adjust then use the Cursor buttons to move the Green cross onto the Template. The adjustment of the cross has two step sizes, large and small. Press the Menu button to toggle between the two. After a point has been adjusted, press the Index button to return to Navigate. When Default settings have been loaded, the leftmost line that is not visible should be adjusted first. Adjust the Vertical line 0 while observing line 1 to make line 1 parallel with the left edge of the screen. The adjustment should only be made in small steps. Do not adjust any one point more than 1/4 the distance of one grid. After the left most line is adjusted, start at the center left of the screen and work to the right, aligning the Horizontal line. When adjusting the Horizontal lines, best results are obtained when working from left to right. After the Center line is adjusted, go to the next line down until all of the lines have been adjusted. Then work from the center up to adjust the Horizontal lines. Using the same method, work from center out to adjust the Vertical lines. At least three passes will be necessary to complete the alignment. Press the Index button to return to the selection menu.

When the Green geometry is complete, Store the data. Remove the Template from the screen. Select Red to Green in the selection menu. Using the same method that was used to adjust the Green Grid to the Template, adjust the Red grid onto the Green Grid.

When the Red to Green is complete, select the Blue to Green using the same alignment method. Each time data is stored, the Intellisense circuit will recalculate the position of the four sensors in the set.

Repeat the adjustment for each of the remaining modes.

Gray Scale Alignment

1. Place the input to the RGB (Aux 5) or Y Pb Pr (Aux 4) mode. Connect a Computer or Computer monitor generator to the Aux 5 input or a Component Generator to Aux 4.
2. Preset the G2 controls counterclockwise.
3. Turn the Green G2 clockwise to make the menu visible.
4. Enter the SAM mode by entering 0, 6, 2, 5, 9, 6, Index on the Remote Control. Select the GDE mode and select WHITE TONE.
5. Preset the following registers: Use the Cursor Right-Left buttons to set the value. Use the Cursor Up-Down buttons to select the register. Press the Menu button to return to exit the WHITE TONE menu.

Name	**Value**
Red Cutoff	3F
Green Cutoff	3F
Blue Cutoff	3F
Red Drive	3F
Green Drive	3F
Blue Drive	3F

6. Set the Brightness, Picture, and Sharpness to their midpoint position. Select a Black Raster pattern on the computer or computer monitor generator.
7. Place a Scope set to measure DC on each cathode to determine the dominant (lowest) color.
8. Adjust the SUB BRIGHTNESS control to set the Black Level equal to 180 volts on the scope.
9. Move the probe to the remaining cathodes and adjust the corresponding cutoff registers to make the black part of the waveform at 180 volts.
10. Set the corresponding G2 control to just make cutoff for the black part of the waveform for that tube.
11. Remove the Scope.
12. Apply a Grayscale pattern to the set.
13. Adjust the Drive Controls to achieve the proper white balance. At least one drive should remain 3F.
14. The following Drives and Cutoffs should be set as listed. These are in the WHITE TONE menu.

Cool Cutoff Red	0
Cool Cutoff Green	0
Cool Cutoff Blue	0
Cool Drive Red	-7
Cool Drive Green	-6
Cool Drive Blue	0
Warm Cutoff Red	0
Warm Cutoff Green	0
Warm Cutoff Blue	0
Warm Drive Red	+7
Warm Drive Green	+4
Warm Drive Blue	-6

15. Press the Menu button to return to the SAM menu. Exit the Service mode by turning the set Off.

See GDE SAM MODE DEFAULTS TABLE

SAM Screen Display

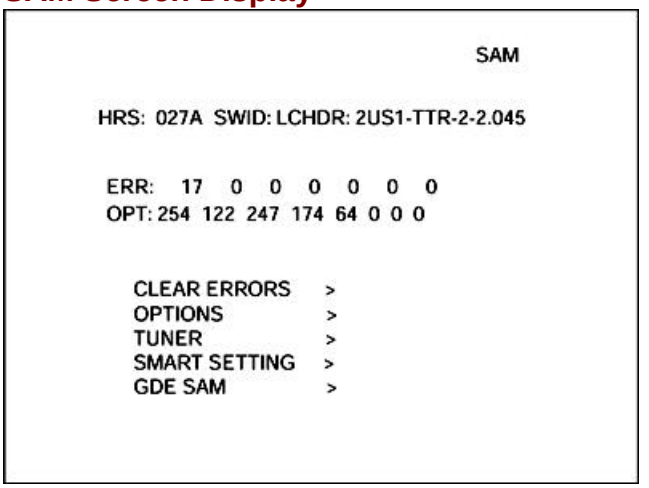
SAM
HRS: 027A SWID: LCHDR: 2US1-TTR-2-2.045
ERR: 17 0 0 0 0 0 0
OPT: 254 122 247 174 64 0 0 0
CLEAR ERRORS >
OPTIONS >
TUNER >
SMART SETTING >
GDE SAM >

The Geometry alignments are in the GDE SAM selection. Use the cursor up-down button to highlight the item. Use the right cursor button to select the item. Use the Menu button to return to the previous menu. The following menu will appear when GDE SAM is selected.

GDE SAM Screen Display

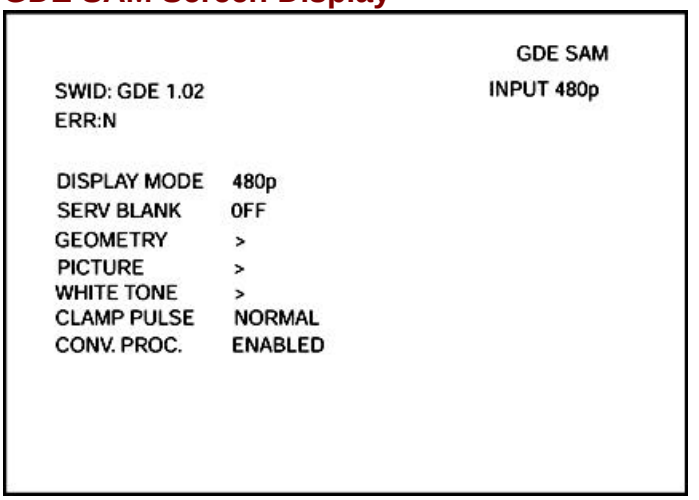

In this menu, the Display Mode can be selected. If the input signal is NTSC, the selection should be 480P. The selection **Serv Blank** causes the bottom half of the screen to blank. This selection is useful when adjusting the Yoke rotation. The **Conv Proc** selection allows for the disabling of the Convergence drive.

Default settings should be entered when the Small Signal Board (SSB) has been changed. When the CRTs have been changed, the display should be centered using the Centering rings on the CRT. The center point can be found by placing a string from corner to corner or by using the center point on the Convergence Template. In the 4x3 Aspect ratio sets, there are three Geometry settings. In the 16x9 Aspect ratio sets, there are two Geometry settings. Make sure the set is in the mode that is being adjusted and that the correct signal is applied.

Customer Service Mode (CSM)

All HDRPTV sets are equipped with the “Customer Service Mode” (CSM). CSM is a special service mode that can be activated and deactivated by the customer, by request of the service technician/dealer in order to identify the status of the set. This CSM is a 'read only' mode, therefore modifications in this mode are not possible.

Entering the Customer Service Mode.

The Customer Service Mode can be switched on:

- By pressing the MUTE button on the remote control and any key on the local keyboard (Channel Up, Channel Down, VOL +, VOL -) on the TV simultaneously for at least 4 seconds.
  (Note: When CSM is entered, “CSM” may flash or may stay constant in the upper right corner.)

When the CSM is activated:

- picture and sound settings are set to nominal levels
- Modes that interfere with the behavior of the set are switched off (sleep timer, auto standby, etc.)

Exit the Customer Service Mode.

The Customer Service Mode will be switched off after:

- Pressing any key on the remote control (except “Channel Up” or “Channel Down”)
- Switching off the TV set by pressing the Power button on the remote control or the local keyboard.

Exiting CSM resets the TV set back to its initial values.

The Customer Service Mode information screen

Upon entry into the Customer Service Mode the following screen will appear.
All lines of information will appear on one screen.

Display of CSM Screen

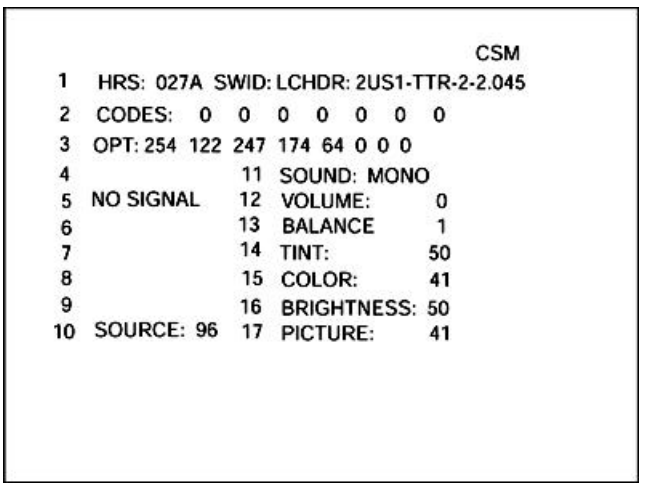
CSM
1 HRS: 027A SWID: LCHDR: 2US1-TTR-2-2.045
2 CODES: 0 0 0 0 0 0 0
3 OPT: 254 122 247 174 64 0 0 0
4 11 SOUND: MONO
5 NO SIGNAL 12 VOLUME: 0
6 13 BALANCE 1
7 14 TINT: 50
8 15 COLOR: 41
9 16 BRIGHTNESS: 50
10 SOURCE: 96 17 PICTURE: 41

The Customer Service Menu shows the following information:

– **Line 1 : "HRS : nnnn" and SWID : "2US1-BBC-X.YY"**

HRS:

Indicates the accumulated total of operational hours. (Shown in hexadecimal format.) (Standby hours are not counted as operating hours).

SWID:

Software identification of the main micro controller (2US1-TTR-1.00)
LCHDR is the chassis name for the HDR2002 PTV.

- **US1** is 2 letter and 1 digit combination to indicate the software type and the supported languages:
- **US** = NAFTA region
- **1** = Main Software language version number
- **2.045**= sub-version number

– **Line 2 : "CODES : xx xx xx xx xx xx xx "**

Error code buffer (see explanation of error codes above) Displays the last 7 errors of the error code buffer.

– **Line 3 : "OPT xxx xxx xxx xxx xxx xxx xxx xxx"**

Option bytes

Option bits control software and hardware functionality. An option byte or option number represents 8 of those bits. Each option number is displayed as a number between 0 and 255. The set may not work correctly when an incorrect option code is set. See Service Adjustments for more information on correct option settings

– **Line 4: "SYSTEM : AUTO"**

Indicates which color and sound system is installed for this preset:

– **NTSC/PAL/SECAM**

Complaints that may be caused by an incorrect system setting:

- no color
- colors not correct
- unstable picture
- noise in picture

To change the system setting of a preset:
Press the "MENU" button on the remote control
Select the INSTALL sub menu
Select the MANUAL STORE sub menu
Select and change the SYSTEM setting until picture and sound are correct
Select the STORE menu item

– **Line 5 : "NO SIGNAL"**

Indicates that the set is not receiving an "ident" signal on the selected source.

- no or bad antenna signal; connect a proper antenna signal
- antenna not connected; connect the antenna
- no channel / preset is stored at this program number; go to the INSTALL menu and store a proper channel at this program number
- the tuner is faulty (in this case the CODES line will contain number 13 or 16); check the tuner and replace/repair if necessary

Note: On some models (if the BM option is ON), BLUE MUTE is displayed when no signal is received.

– **Line 6 : “TIMER ON ”**

Indicates that the on/off timer is running.
The following Complaints may be caused by the activation of the sleep timer:
The set may turn on from standby or may switch to a different channel without using either the remote control or the local keyboard.

To switch off the activation timer:
Select “TIMER” in the “FEATURE” menu.
Select “ACTIVATE” in the “TIMER” menu.
Set to “OFF” with the left/right cursor keys.

– **Line 7 : “CHANNEL BLOCKED”**

Indicates that all channels are locked except the selected channel.
The following complaints may be generated due to locked channels:
– TV cannot be switched on from standby with the local keyboard buttons.
– “CH+” and “CH-“ buttons on local keyboard do not function.

To disable the LOCK feature:
Select ”FEATURE” menu (with the Remote Control).
Select “LOCK” (with the Remote Control).
Set to “OFF”

– **Line 8 : “NOT PREFERRED”**

Indicates that at least one channel is deleted as a preferred channel (by default, all channels are skipped).
Note that “SKIPPED” will always be displayed in CSM unless all the channels are not skipped.

To add a channel as a selected channel to the list of preferred channels:
Select “INSTALL” menu
Select “CHANNEL EDIT”
Select “ADD/DELETE”
Set to “ADD” with the left/right cursor keys

– **Line 9 : “HOTELMODE ON”**

Indicates that the Hotel mode has been activated.

– **Line 10 : “SOURCE :”**

Indicates which SOURCE is installed for this preset.
AV1, AV2, SVHS2, Channel number (8)

– **Line 11 : “SOUND”**

Indicates which sound mode is installed for this preset.
Mono, Stereo, SAP, NICAM, L1, L2, Virtual or Digital

– **Line 12 : “VOLUME”**

Value indicates level at CSM entry.

– **Line 13 : “BALANCE”**

Value indicates level at CSM entry.

– **Line 14 : “TINT”**
Value indicates level at CSM entry.

– **Line 15 : “COLOR”**
Value indicates level at CSM entry.

– **Line 16 : “BRIGHTNESS”**
Value indicates level at CSM entry.

– **Line 17 : “PICTURE”**
Value indicates level at CSM entry.

INTRODUCTION

The HDR2002 is designed for the 2002 model year. The set is a High Definition Ready Projection television. High Definition Ready means the set will accept HDTV analog inputs. It does not have an ATSC tuner. The set is designed to accept RF, Component, and Composite signals in the NTSC format, Progressive Scan format, or 1080I Y Pr Pb formats. It comes in a 43 inch, a 50 inch, and a 60 inch in the 4x3 aspect ratio screens sizes. In the 16x9 aspect ratio sets, it comes in 46 inch, 55 inch, and 60 inch screen sizes.

- In these sets, a Line Doubler converts the NTSC input signal to a progressive scan format.
- All versions of the set have three NTSC composite or SVHS inputs
- They also have one NTSC Y Pr Pb component input.
- Additionally there is one High definition Progressive Scan or 1080I component input. The high definition input or progressive input signals can be either Y Pr Pb or RGB.

Feature differences divide these sets into three versions. They are Basic, Basic plus, and Core models.

Basic:
The Basic version is equipped with a 20 watt class D audio amplifier. It has a standard single PIP (Picture in Picture) mounted on a separate circuit board. It utilizes a 3 line Comb filter.

Basic Plus:
The Basic Plus version is also equipped with a 20-watt class D audio amplifier. It is equipped with a two-tuner standard PIP and uses a 3D Comb filter mounted on a separate circuit board. An additional HD input, DB15 (AV5) is located on the rear panel.

The Core version is equipped with a 30-watt class D audio amplifier and features a two tuner double window PIP system mounted on a separate circuit board. Like the Basic Plus, it incorporates a 3D comb filter. Other features are a DVI input connector, Auto Intellesense Convergence, Center Channel audio output and a line level Subwoofer output.

Overall Power Supply Block

Figure 1

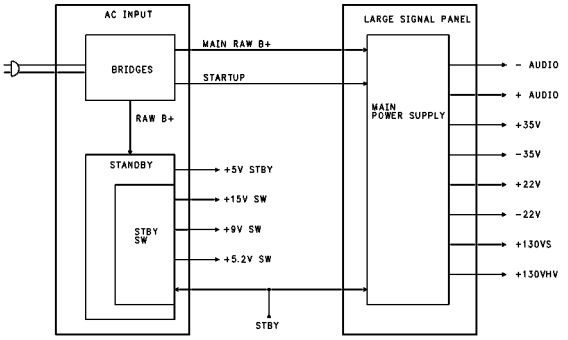

The Bridge rectifiers and Standby supply are located on the Input Panel. The Main Power supply is located on the Large Signal panel. The Standby supply produces +5 volt standby voltage. When the set is turned On, the Standby line goes Low, switching the Standby supply to produce +15 volt, +9 volt, and +5.2 volt sources. It also turns the Main Power supply On, which produces the Audio, +35,-35, +22, -22, +130VS, and +130VHV supplies. The +130VS supply is for the Horizontal Output section. The +130VHV supplies power to the High Voltage section.

AC Input Board

Figure 2

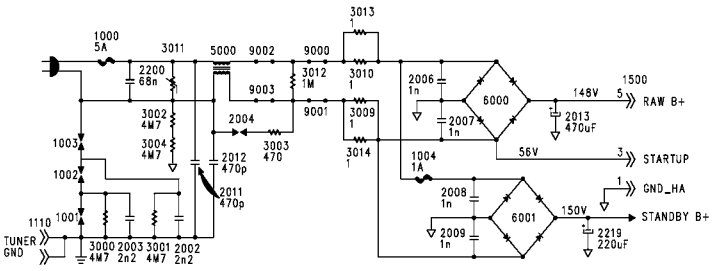

AC Power is fed to the Input Panel. A 5-amp fuse, 1000, provides protection. Choke 5000 provides filtering for the AC. 1003,1002,1001, and 3011 provide protection against Line Surges. Bridge 6001 rectifies the voltage for the Standby Power supply. Resistors 3009, 3014, 3013, and 3010 provide current limiting when power is first applied to the set. Bridge 6000 rectifies the voltage for the Main power supply. Startup voltage for the Main Power supply is taken from the neutral side of the AC line. Fuse 1004 provides protection for the Standby Power supply.

Standby Power Supply

Figure 3

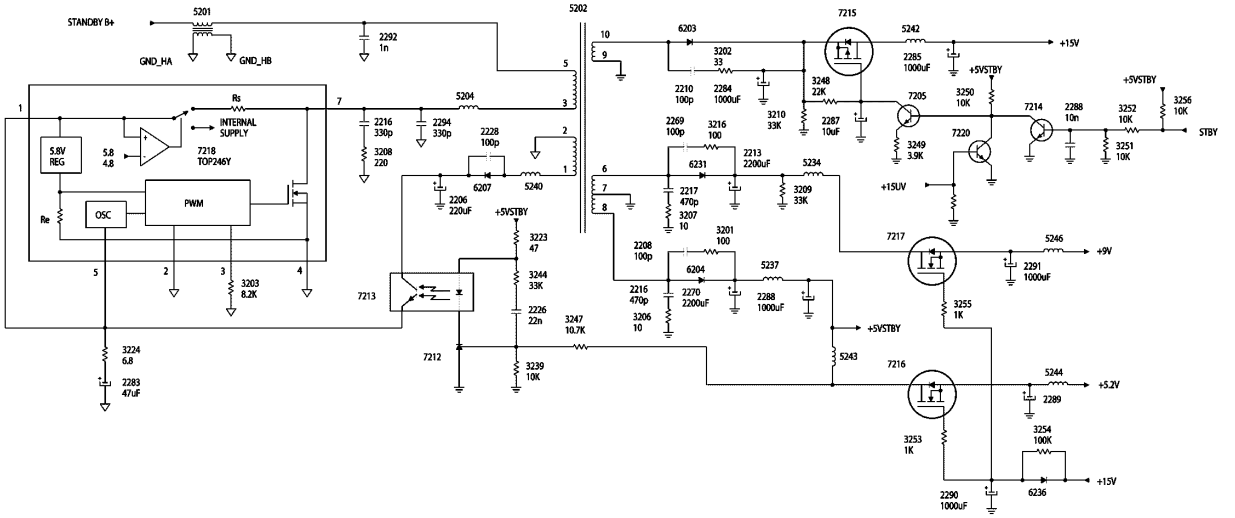

Standby B+ is applied to the Standby Switching regulator 7218 via Pins 5 and 3 of 5202. An internal switch in 7218 charges capacitor 2283 connected to Pin 1 of the IC. When the charge on 2283 reaches 5.8 volts, the internal switch switches to internal. The IC is now being powered by the charge on capacitor 2283. The internal FET drives the transformer 5202 until the charge on capacitor 2283 reaches 4.8 volts. The IC repeats the cycle until the 5- volt Standby voltage reaches the correct level. Shunt regulator 7212 then turns On, turning the optoisolator 7213 On. The operating voltage for 7218 is then supplied by the rectified Hot secondary voltage from Pin 1 of 5202. The internal regulator keeps Pin 1 at 5.8 volts. Regulation is accomplished by monitoring the 5-volt standby voltage. If the 5-volt supply increases, the shunt regulator 7212 will conduct more, causing the resistance of the transistor inside 7218 to decrease. The sensing resistor, Re, inside 7218 will sense the increase in current and reduce the On time of the internal FET, which will lower the 5-volt supply to the correct level.

In Standby, the 5-volt Standby voltage is the only voltage being applied to the set. The +15, +9, and +5.2-volt sources are turned Off. When the set is turned On, the Standby Line goes Low, turning transistor 7214 Off, turning 7205 On, which turns 7215 On. This switches the +15-volt supply to the set. The +15-volt supply then switches transistors 7216 and 7217 On to switch the +9-volt and +5.2-volt supplies to the set. When the +15UV (Under Voltage detection) line goes High, transistor 7220 will turn On, which will turn 7205 Off. This will cause 7215 to turn Off, switching the +15, the +9, and the +5.2-volt supplies Off. This will cause the set to shut down.

Under Voltage Detection

Figure 4

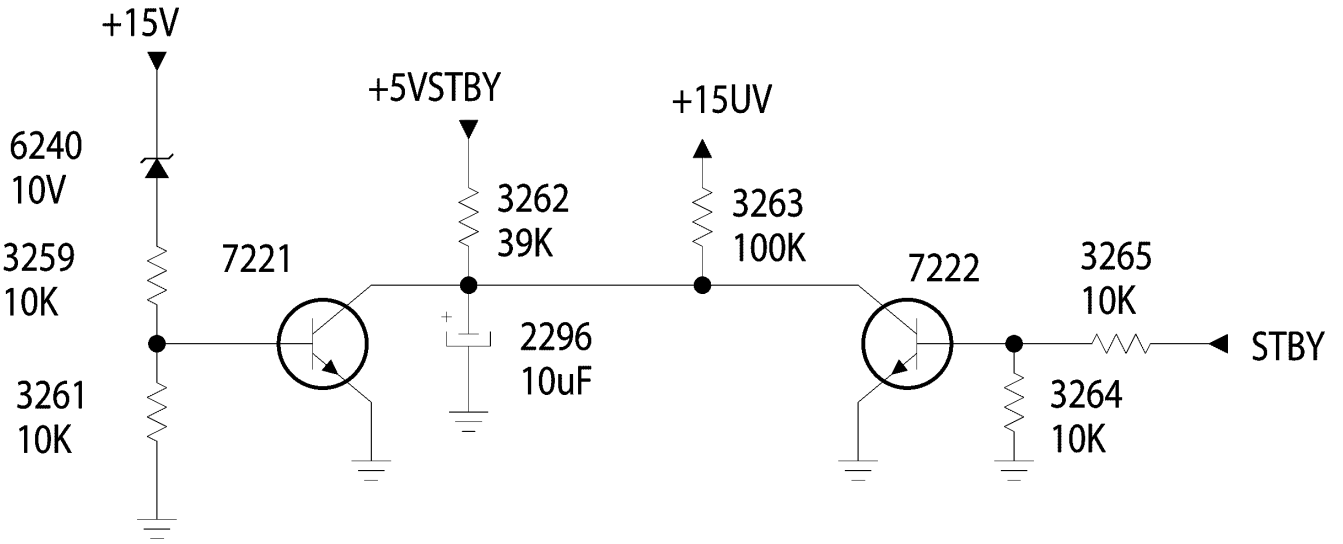

If the 15-volt supply drops below 11.2 volts, transistor 7221 will turn Off. The 5-volt standby supply will be applied to the base of 7220 via resistors 3262 and 3263. This will cause the +15UV line to go High. In the Standby mode, the Standby line is High turning transistor 7222 On. When the set is turned On, 7222 turns Off. Capacitor 2296 provides a delay to prevent the +15UV line from going High before the +15V supply turns On.

Full Power Supply

Figure 5

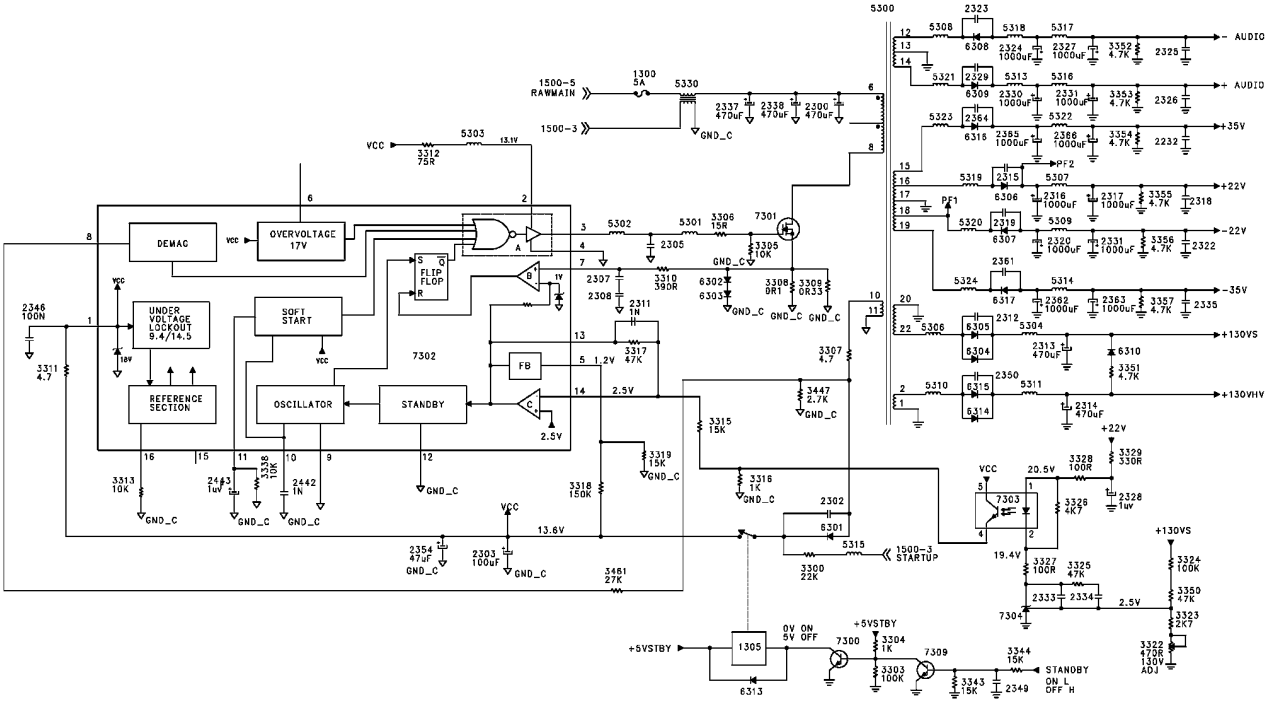

The Full Power supply is located on the Large Signal panel. The Raw B+ voltage from the Input panel is applied to the Full Power switching transistor, 7301, via Pins 6 and 8 of transformer 5300. This voltage is protected by Fuse 1300 and filtered by Choke 5330. The Standby line goes Low when the set is turned On. Transistor 7309 is turned Off, which turns 7300 On. This turns Relay 1305 On. Startup voltage is applied to Capacitor 2303 via resistor 3300. When 2303 charges to 14.5 volts, the undervoltage lockout of 7302 connected to Pin 1 is turned On. Drive is output on Pin 3 to the Switching FET, 7301. This drives 5300 to produce the Full power supply voltages. IC 7302 will continue to drive 5300 until the charges on capacitor 2303 drop below 9.4 volts. The Under Voltage Lockout of 7302 will then turn the output on Pin 3 Off until 2303 again charges to 14.5 volts. After several startup cycles, the operating voltage for 7302 is supplied by Pin 10 of 5300.

Regulation is accomplished by monitoring the 130VS supply via resistors 3324, 3350, 3323 and 3322. The Feedback voltage is applied to the Shunt Regulator 7304, which drives the Feedback optoisolator, 7303. The Feedback voltage is applied to Pin 14 of 7302. The voltage is fed to comparator "C" which is referenced to 2.5 volts. The output of this comparator sets the reference voltage for comparator "B" which is compared with the voltage on the source of 7301. This voltage is developed when 7301 turns On, causing current to flow through resistors 3308 and 3309. If 7301 fails, Resistors 3308 and 3309 should be replaced.

The Full Power supply produces two 130 volt, a 35 volt, a 22 volt, a minus 22 volt, a minus 35 volt, a plus audio supply, and a minus audio supply. The Audio supply is a plus and minus 19 volts in sets that use the 20-watt audio amplifier. The Audio supply voltages will be four volts higher in sets with a 30-watt audio amplifier.

When troubleshooting, notice that the Hot ground for the Full power supply is separated from the main Hot ground on the Input Panel by Choke 5330. To ensure correct readings, use the Hot ground in the Full power supply. If the power supply is overloaded or the operating voltage is missing, the voltage on Pin 1 of the IC will be changing between 9.4 and 14.5 volts. Each time the voltage reaches 14.5 volts, drive will appear on Pin 3 of the IC. If a voltage is present on Pin 1 that is greater than 14.5 volts, and there is no drive on Pin 3, the IC should be replaced. If drive is present on Pin 3, check for drive on the Drain of 7301. If drive is present here, check for a short on the 130-volt lines, a problem in the feedback circuit, or a problem with the operating voltage.

Power Fail Shutdown

Figure 6

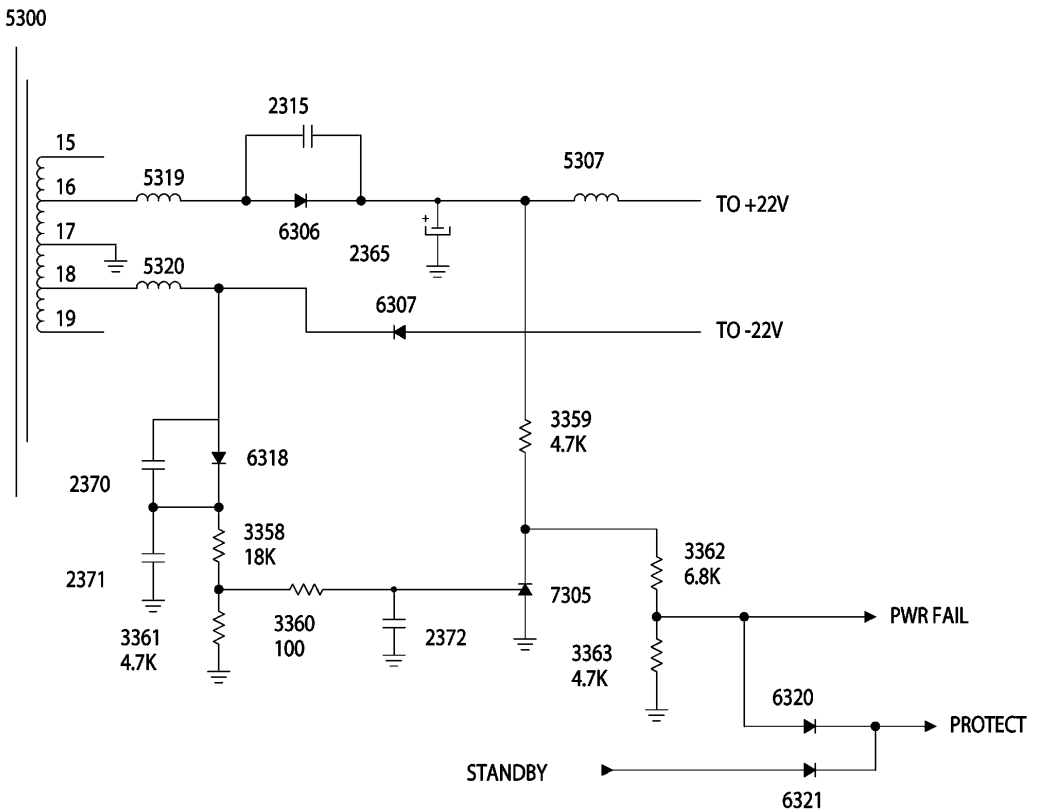

The +22-volt supply is rectified by 6306 and the negative 22-volt supply is rectified by 6307. The voltage on Pin 18 of 5300 is monitored to detect a failure of the AC supply to the set. This circuit signals the Microprocessor in the event that AC is removed from the set while it is turned On. The voltage from Pin 18 is rectified by 6318 and is applied to the Shunt Regulator 7305. Shunt Regulator 7305 is turned On, keeping the Power Fail and Protect lines Low. When AC is removed while the set is On, 7305 will turn Off fast. This is because the filter capacitor for the input to 7305 is small. When 7305 turns Off, the Power Fail line goes High from the voltage on the +22-volt line. The Microprocessor will shut the set down while it still has voltage to operate.

Video Signal Flow

Figure 7

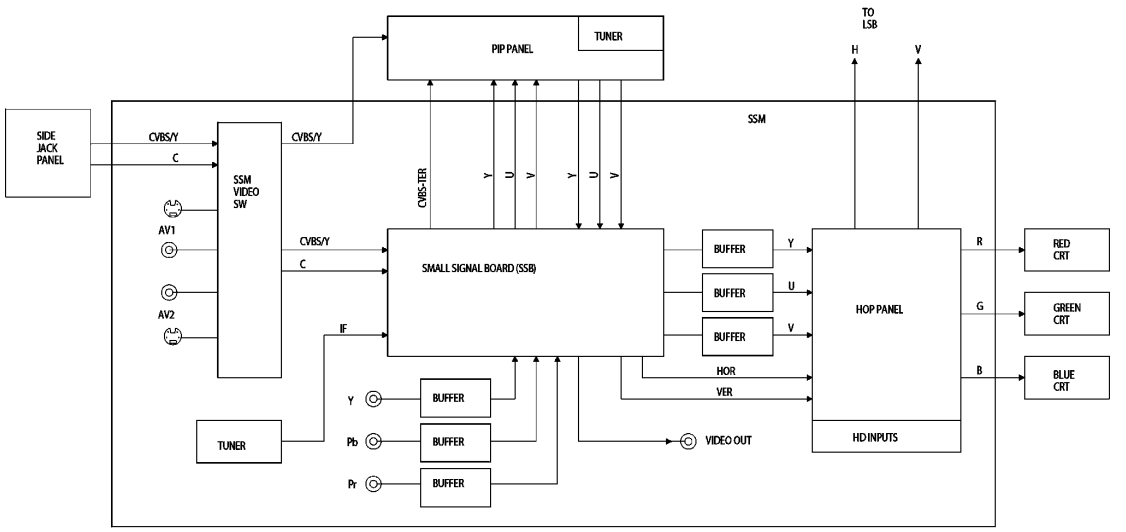

The HDR2002 is able to accept inputs from NTSC sources, Progressive Scan inputs, and 1080I inputs. Composite Video or YC from the Side Jack panel is fed to the Video switch located on the SSM (Small Signal Module). The SSM Video switch selects between the Composite inputs or SVHS inputs of the Side Jack panel for the inputs located on the SSM. AV1 and AV2 inputs are located on the SSM. AV3 is the Side Jack panel input. Selected Composite video or YC is fed to the SSB (Small Signal Board) that plugs into the SSM. NTSC component video Y Pb Pr is buffered and fed to the SSB. Selected Composite Video is fed to the PIP panel for the PIP window picture information. In the Basic version, Composite video from the SSB is also fed to the PIP panel. In the Basic version, the PIP panel does not have a Tuner. The PIP panel does have a Tuner in the Basic + and Core version. The main Tuner is located on the SSM. IF from this Tuner is fed to the SSB. Composite video from the SSB, which is developed from the main Tuner, is fed to the PIP panel. Switching on the PIP panel selects between video from the main Tuner or from the Tuner on the PIP panel in sets with two-tuner PIPs. Selected Video is fed back to the SSB. YUV for the main picture from the SSB is fed to the PIP

panel for the Picture in Picture information to be inserted. After insertion of the PIP information, the YUV signal is fed back to the SSB. A line doubler circuit on the SSB called the Feature Box changes the interlaced NTSC signal to a Progressive Scan signal. This YUV signal is buffered and fed to the HOP panel. The HOP panel has the Progressive Scan and 1080I inputs. The Video processing circuits on this panel perform the Color, Tint, Brightness, and Contrast adjustments for the video. Signal selections between the Progressive Scan signal from the SSB and the HD inputs are performed on the HOP panel. Sync processing and selection are also performed on the HOP panel. Red, Green, and Blue drive from the HOP panel is fed to the three CRT panels. The 43-inch Core version will also have a DB15 RGB connector on the HOP panel. The 55 and 60-inch wide screen Core versions will have a DVI (Digital Video Interface) connector. There are two sets of connectors labeled Y Pb Pr. The one on the SSM is for NTSC signal levels only. The one on the HOP is for 1080I or 480p Progressive Scan only.

Side Jack Panel

Figure 8

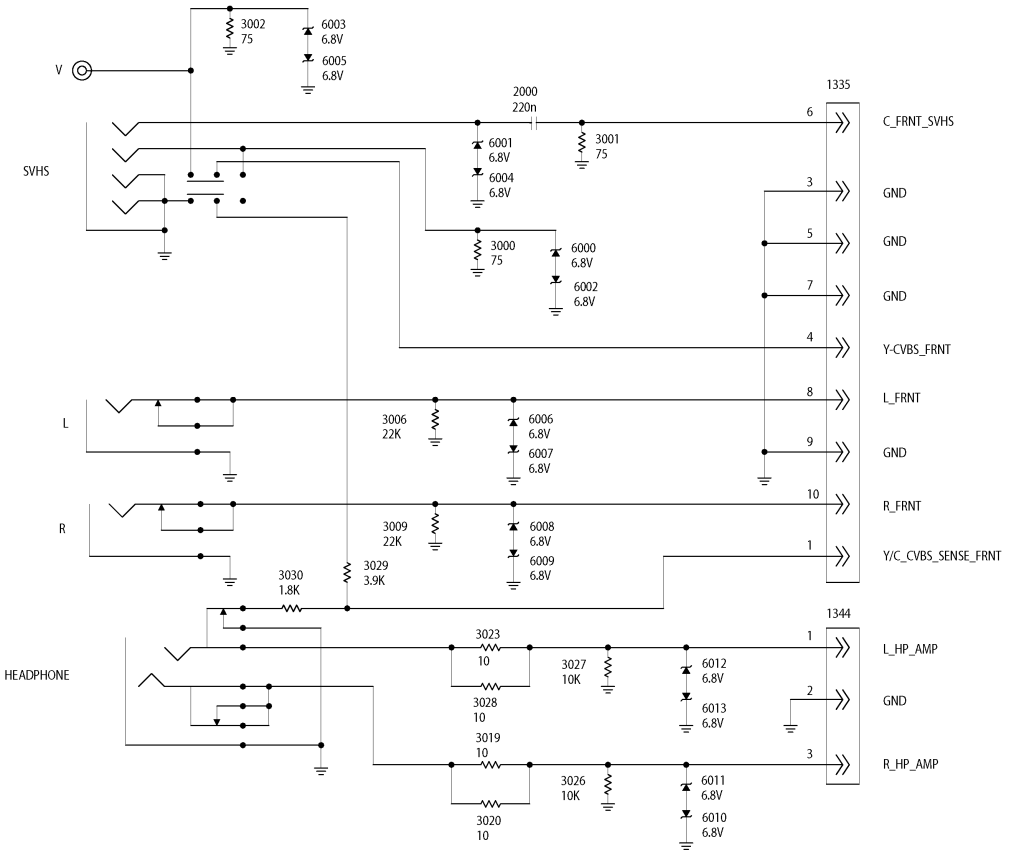

The Side Jack panel has a Composite Video and SVHS input. There is a left and right channel audio input. When there is a connector in the SVHS input, the Composite input is muted. A switching circuit signals the Microprocessor when there is something plugged into the SVHS or Headphone connectors.

Composite Inputs

Figure 9

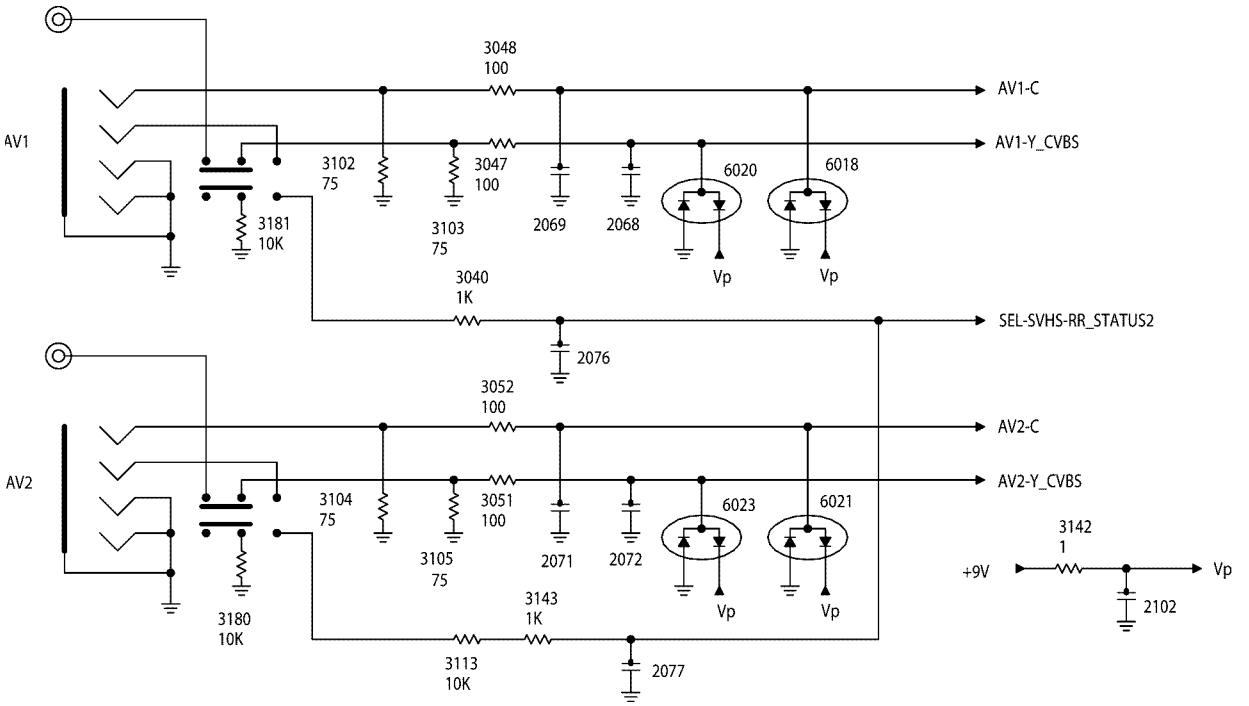

The Composite inputs are located on the SSM. There are two Composite or SVHS inputs. A connector in the SVHS inputs will mute the Composite inputs. A connector in the SVHS inputs will cause a voltage change on the SEL-SVHS-RR_STATUS2 line. This will signal the Microprocessor that something is connected to that input.

Diodes 6018, 6020, 6021, and 6023 clamp the input signal levels to prevent an excessive voltage from being applied to the inputs.

SSM Video Switching

Figure 10

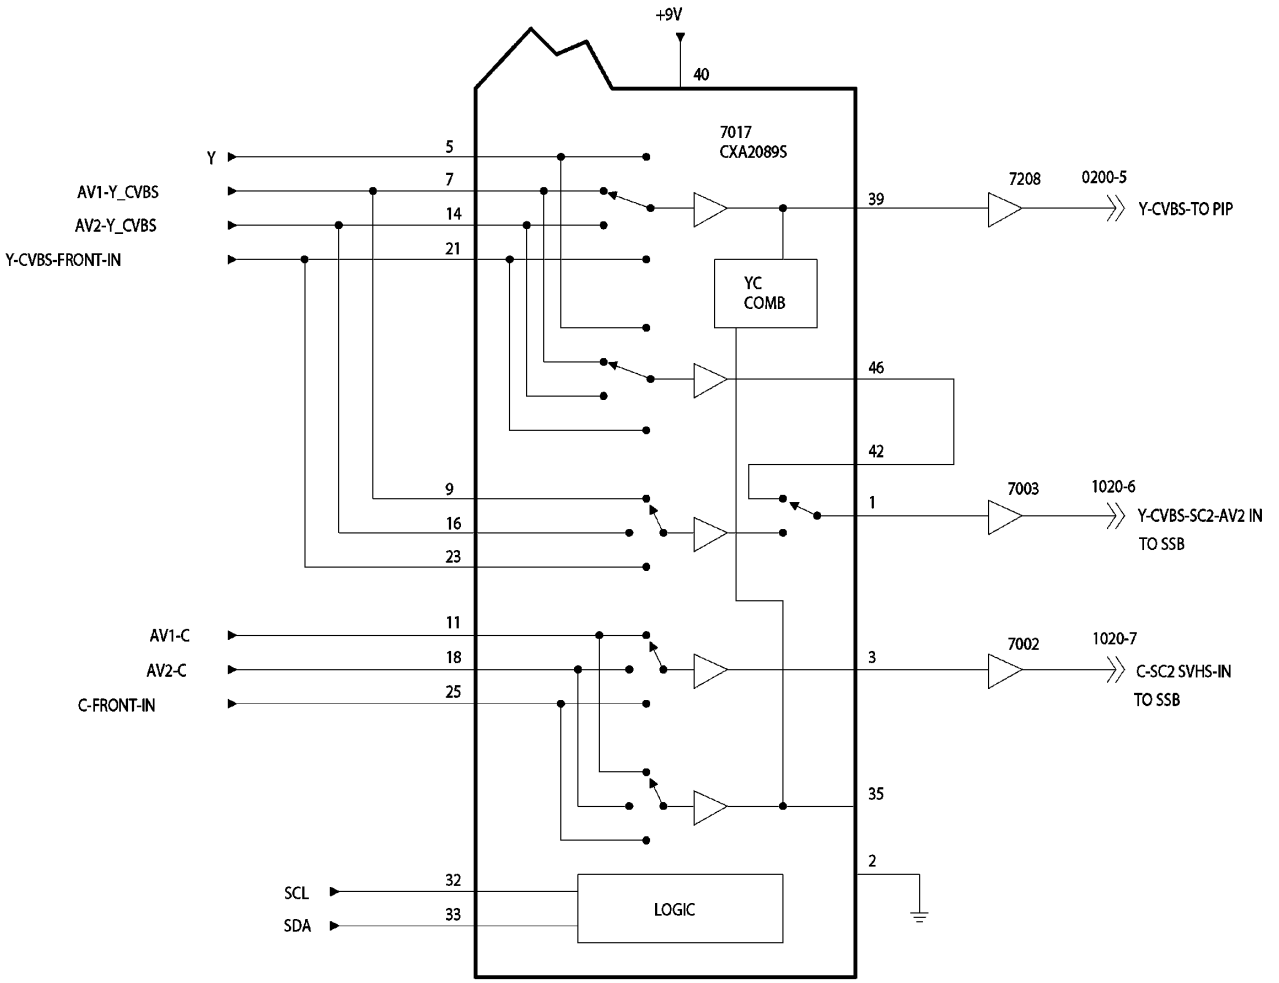

IC 7017 located on the SSM performs the Video and Audio switching for the Composite inputs to the SSM. Selected Y or Composite video is output on Pin 1 before being fed to the SSB. Selected C is output on Pin 3 and is fed to the SSB. Selected Composite Video for the PIP window is output on Pin 39 and fed to the PIP panel. If an SVHS source is selected for the PIP window, the YC is combined in 7017 and output on Pin 39. IC 7017 is controlled by the Microprocessor via the I2C SDA and SCL lines on Pins 33 and 32.

SSB Video Switching

Figure 11

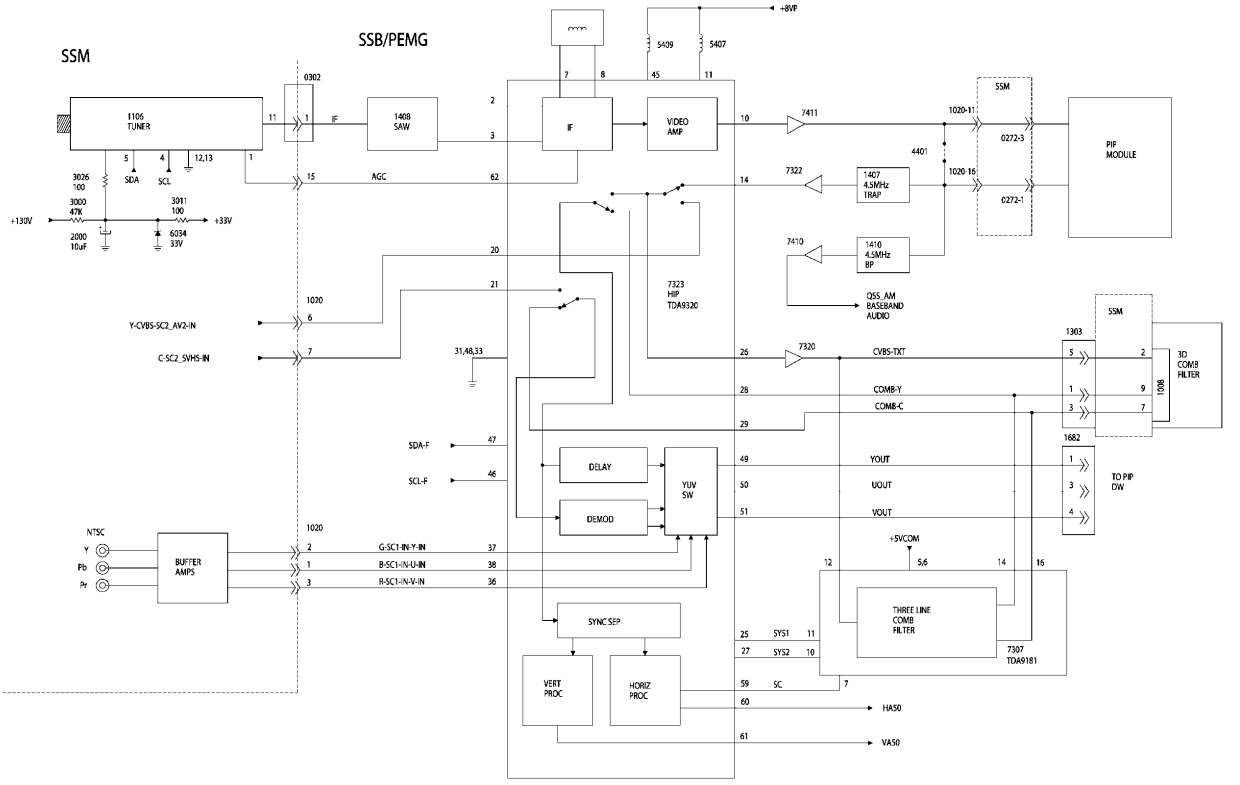

Selected Composite video from the SSM is fed to HIP 7323 located on the SSB. IF from the main Tuner located on the SSM is fed to the SSB via connector 0302 to the SAW filter 1408 and to Pin 2 and 3 of 7323. Composite Video is output on Pin 10 and is buffered by 7411 before being fed to the PIP panel via the SSM in the Basic version only. In the two tuner versions, Basic+ and Core, the tuner on the PIP panel tunes to the channel selected by the user for the PIP window. There is no second Tuner in the Basic version. Video for the main picture is fed through 4401 to 1407. Composite video from 1407 is fed to transistor 7322 and to Pin 14 of 7323 to an internal switch, which selects between the Tuner video and selected Composite video or Y. If it is a YC signal, the Y signal is internally selected and fed to a Delay and YUV switch. Chroma or C is fed to Pin 21 and is fed to the Demodulator and to the YUV switch. Selected Composite video is output on Pin 26 and is buffered by 7320. In the Basic version, the Composite video is fed to 7307, a three-line Comb Filter, for YC separation. In the Basic + and Core versions, the Composite video is fed to a 3D Comb filter located on a separate panel. YC is then fed back to the HIP on Pins 28 and 29. The YUV switch selects between the YUV from the internal decoder or YUV from the Y Pb Pr inputs located on the SSM. The Microprocessor located on the SSB via the I2C buss, SDA-F and SCL-F, controls the HIP, 7323. The Y Pb Pr signals for NTSC are fed through buffer amplifiers on the SSM before being fed to the SSB. The selected YUV signal is output on Pins 49, 50, and 51 to the PIP/DW circuit via connector 1682.

NTSC Component Buffer Amplifiers

Figure 12

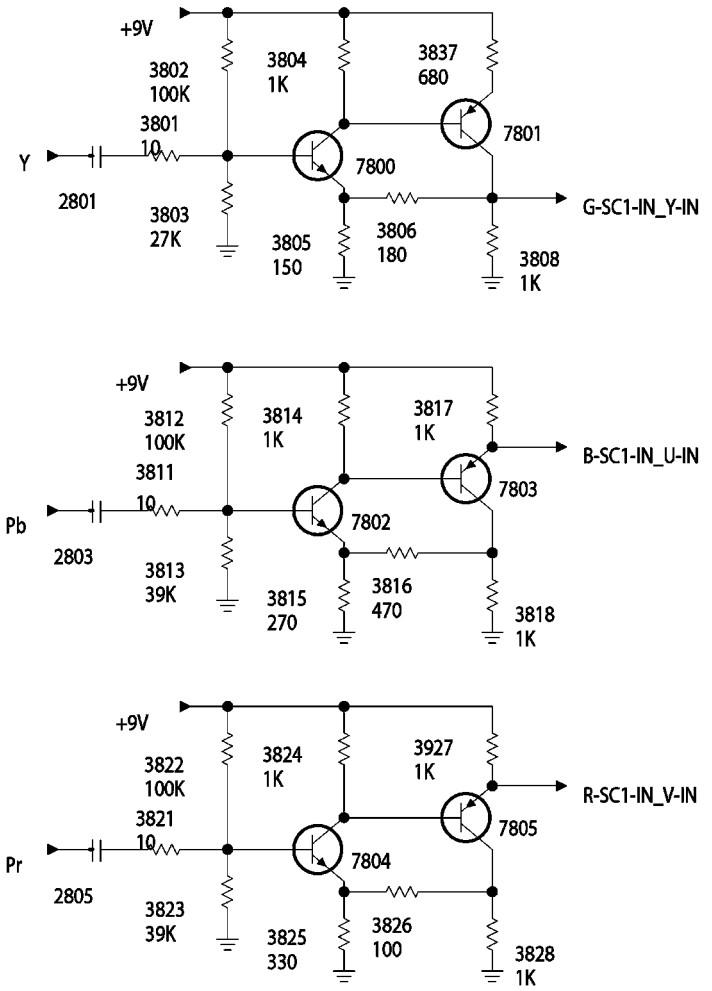

The Y signal is buffered by transistors 7800 and 7801. This is an impedance matching circuit. This circuit does not invert the signal. The Pb signal is amplified by 7802 and buffered by 7803. The Pr signal is amplified by 7804 and buffered by 7805. The Pb and Pr signals are inverted.

PIP

There are two different PIP versions in the HDR2002. The Basic and Basic Plus versions use a Standard Single window PIP. The Core Versions have a Double Window PIP that is capable of showing a Standard PIP, small window, or a double window, split screen.

Standard PIP Signal Flow

Figure 13

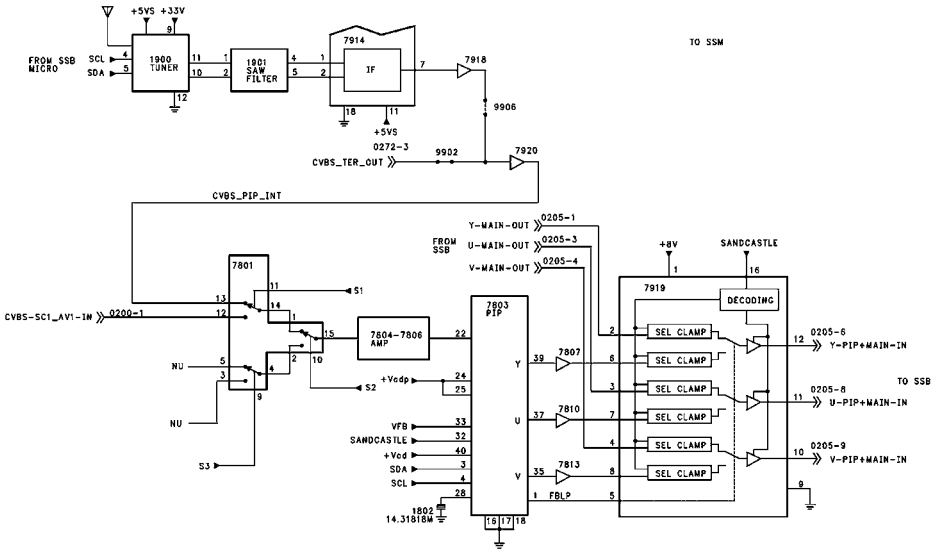

The Standard PIP comes in two versions: Single-Tuner with no tuner on the PIP panel and two- tuner versions with the second tuner located on the PIP module. Output of the second tuner is fed to the SAW FILTER 1901, and to the Signal Processor 7914. Composite Video is output on Pin 7 and buffered by transistor 7918. If the set has two-tuners, the video is output through jumper 9906 to buffer transistor 7920. If the set is a single-tuner version, video from the SSB is fed to 7920 via jumper 9902. Video is then fed to 7801, which selects between the output of 7916 or from selected composite video from the SSM. The output of 7801 is buffered by a four-transistor amplifier before being fed to Pin 22 of 7803, PIP processor. The PIP processor is controlled by the I2C buss (SDA and SCL) from the SSB Microprocessor. It is kept in sync by the Vertical sync pulse (VFB) and the Horizontal sync pulse (SANDCASTLE). The PIP window video is output as YUV to the YUV switch, 7919. The signal is combined with the main picture YUV from the SSB panel on connector 0205. The combined YUV signal is output on Pins 12, 11, and 10 to the SSB.

Standard PIP Switching

Figure 14

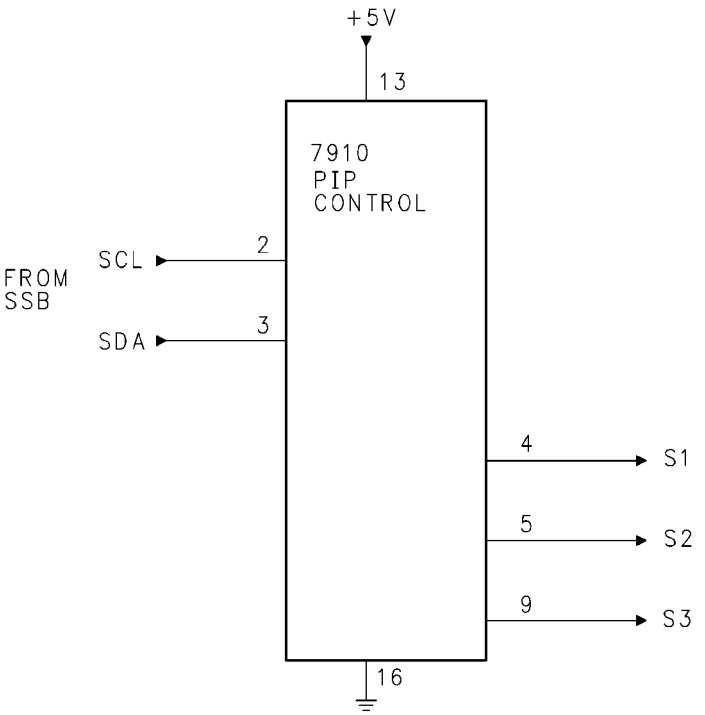

Control for the PIP panel is performed by 7910 via the I2C buss. SEL_TUNER1 and SEL_TUNER2 control the composite switching to the SSB panel. S1, S2, and S3 control the tuner aux switching IC, 7801.

Standard PIP Power Supply

Figure 15

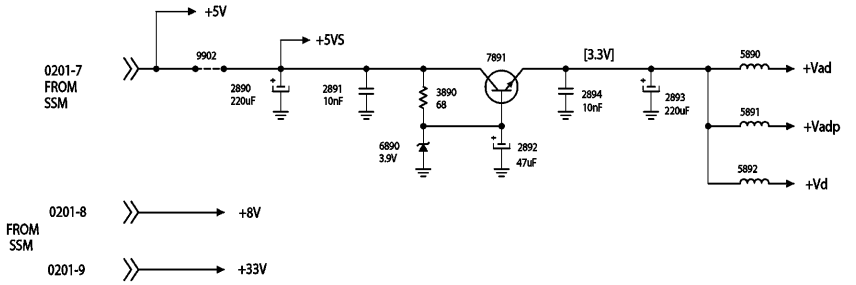

The PIP panel is powered by +5-volt, +8-volt, and +33-volt supplies from the Small Signal Module (SSM). A 3.3-volt regulator supplies power to the PIP processor, 7803.

Double Window PIP

Figure 16

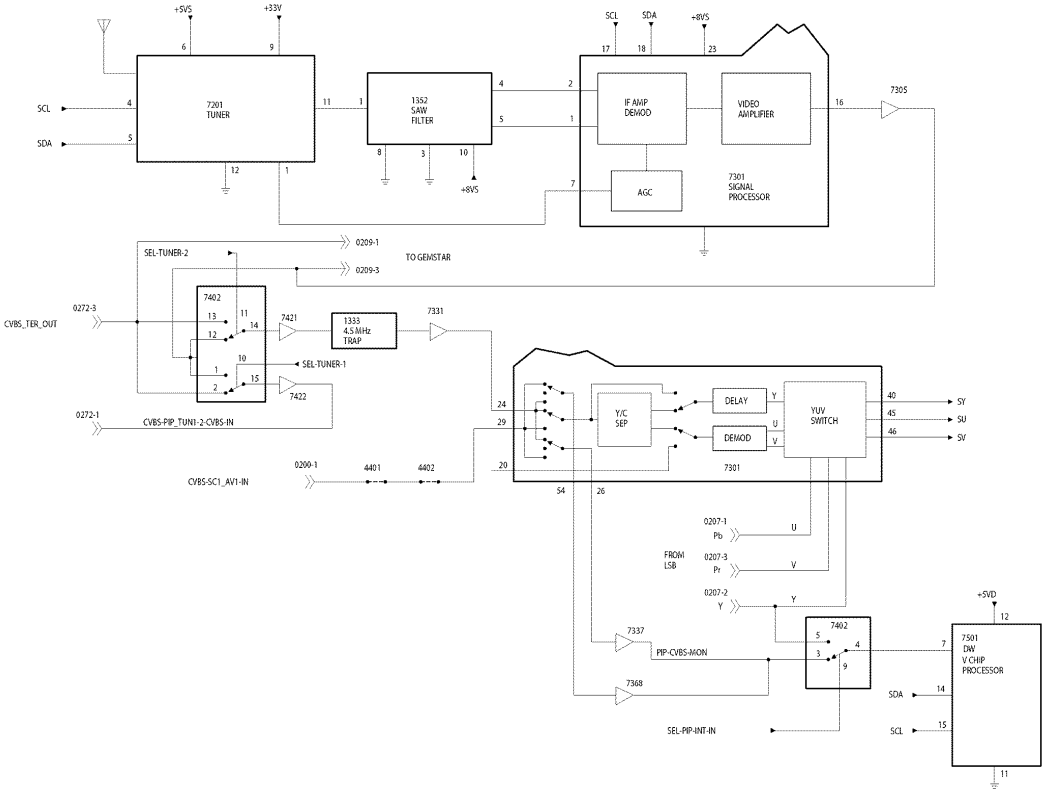

The PIP/Double Window panel allows for both a standard PIP window and a split screen. The PIP/Double Window module has a separate Tuner, SAW filter, and Signal Processor. The output of the Signal Processor, 7301, on Pin 16 is fed to switching IC 7402 which selects between the PIP Tuner and Composite Video from the SSB. Selected Composite Video for the main picture is output on Pin 15 of 7402 and is fed to the SSB. Selected Composite Video for the PIP window is output on Pin 14 and is buffered by 7421. It is fed to 1333, 4.5MHz Trap. It is then buffered by transistor 7331 before being fed to Pin 24, which selects between the selected Tuner Video or selected Composite Video from the SSM. Composite Video is fed to a YC separator, then to a Delay Line and Demodulator. If it is a YC signal, it bypasses the YC separator. The YUV signal is then fed to the YUV switch, which selects between the output of the Delay Line and Demodulator, and external YUV from the Large Signal Board. The YUV (SY, SU, and SV) is output to the PIP processor IC. Selected Composite Video is fed to the V-Chip processor. V-Chip processing for the main picture is done by the Microprocessor on the SSB.

Double Window Output

Figure 17

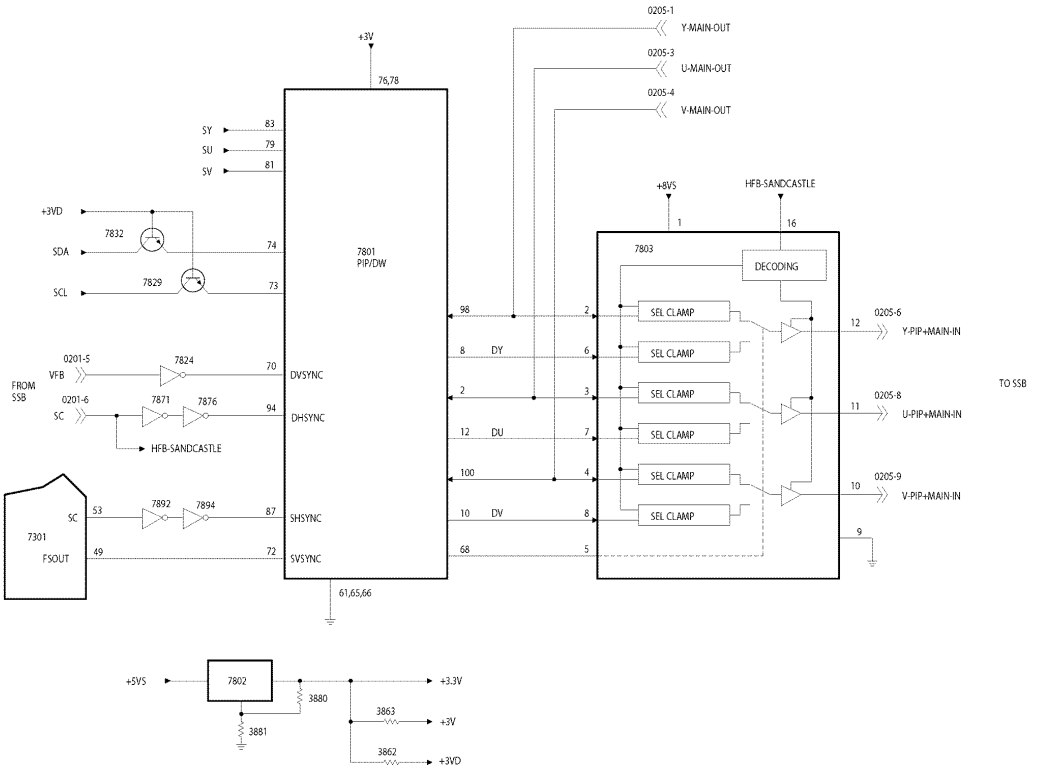

The PIP or Double Window YUV signal is fed to the PIP/DW processor, 7801. The I2C buss controls the IC from the Microprocessor on the SSB. The PIP/DW processor outputs YUV for the PIP window or Split Screen to the YUV switch,7803, where it is mixed with the YUV signal from the SSB for the main picture. The Fast Blanking line from 7801 on Pin 68 controls the switch point in which the PIP window or Split Screen is inserted. The +3VD line switches the SDA and SCL lines. The PIP processor is powered by the +3-volt supply. The +3.3-volt, +3-volt, and +3VD-volt supplies are produced by the regulator 7802, which is driven by the +5VS supply. This supply is switched On when the PIP window is selected.

Double Window Control and Power Supply

Figure 18

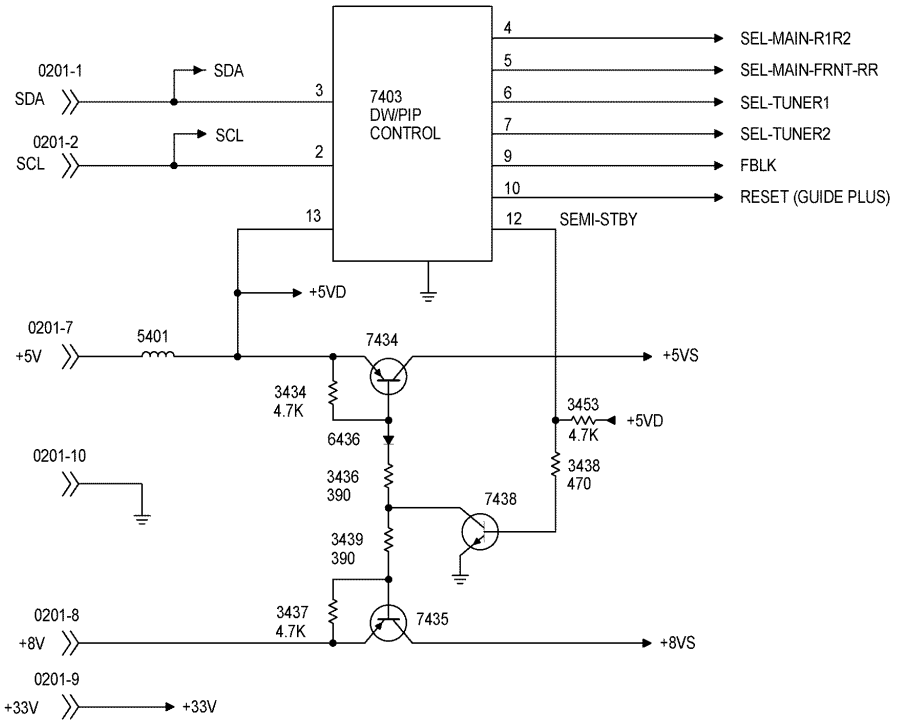

The PIP/Double Window module is controlled by the I2C buss through 7403 on the PIP module. Pins 4, 5, 6, and 7 perform Video selection functions. Pin 10 produces a reset signal for the Guide Plus module. Pin 12 controls the +5VS and +8VS supplies.

Feature Box

Figure 19

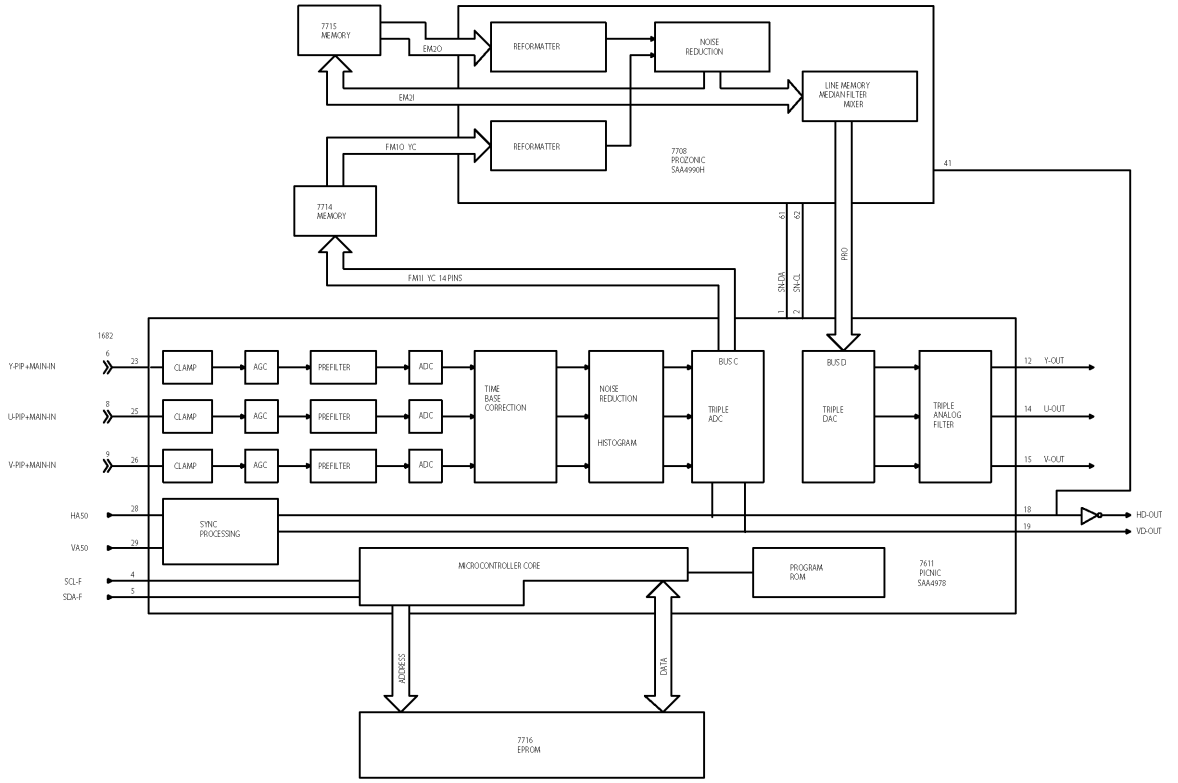

The YUV signal from the PIP module is fed back to the SSB on connector 1682, Pins 6, 8, and 9. This circuit is called the Feature Box. The Feature Box changes the picture from a 15734 Hz NTSC interlaced signal to a 480P progressive scan signal at 31468 Hz. The refresh rate or vertical stays 59.94 Hz.

The signal is fed to 7611 on Pins 23, 25, and 26. This IC is called the PICNIC (Picture Improvement Network IC). The Clamping circuit sets the reference level for the black level of the YUV signal. The Prefilter circuit limits the higher frequencies to prevent aliasing to low frequencies. The signal is then fed to a triple Analog to Digital Converter, ADC. The digital signal is then fed to a Time Base Corrector, a Noise Reduction and Histogram, and to a Multiplexer. The YC/UVC signal is then fed to the Field Memory IC, 7714. The PROZONIC IC, 7708, then reads the data from 7714. The PICNIC communicates with the Microprocessor via the I2C buss via the SCL-F and SDA-F lines connected to Pins 4 and 5. The PICNIC communicates with the PROZONIC via the SN-DA and SN-CL lines. The EEPROM, 7716, stores operational data for the Microprocessor in the PICNIC.

The PROZONIC (Progressive Scan-Zoom and Noise) IC converts to a digital signal from the PICNIC, which is a 15734 NTSC digital signal to a Progressive Scan digital signal at 31468 Hz. ICs 7714 and 7715 are Memory ICs, which store the video fields as they are being processed by 7708. The two fields are recombined in the Line Memory inside 7708. The digital 480P signal is then output to a triple DAC (Digital-to-Analog Converter) in IC 7611. The analog signal is then filtered and then output as YUV on Pins 12, 14, and 15.

Horizontal and Vertical sync is output on Pins 18 and 19. The output on Pins 12, 14, and 15 is a 480P analog signal.

SSM HOP Buffer Amplifiers

Figure 20

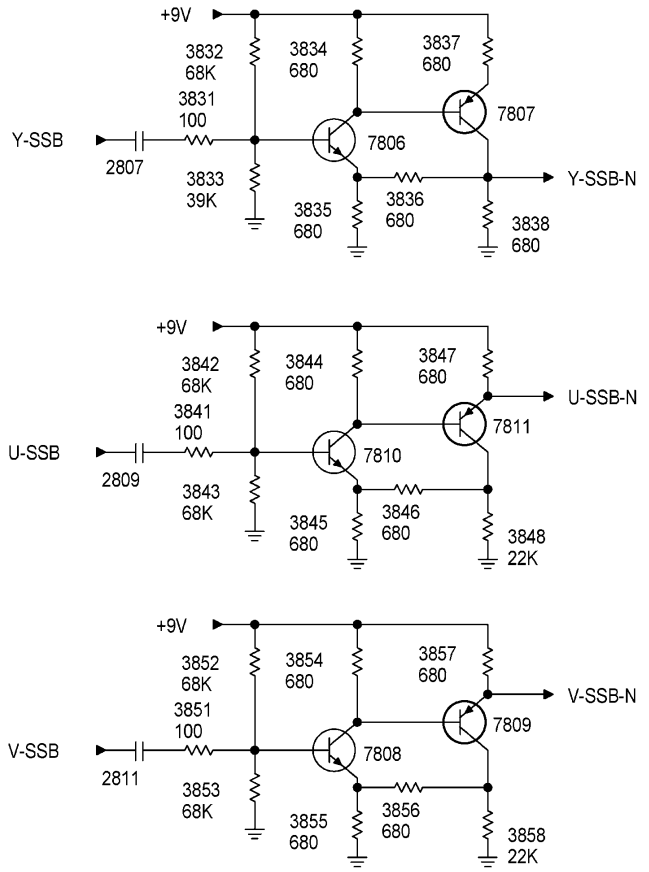

The Y-SSB, U-SSB, and V-SSB signals are fed to buffer amplifiers located on the SSM. Transistors 7806 and 7807 buffer the Y signal. The U signal is buffered and inverted by transistors 7810 7811. The V signal is buffered and inverted by transistors 7808 and 7809. The YUV signals are then fed to the HOP panel via connector 1250.

HOP RGB/YUV Switching

Figure 21

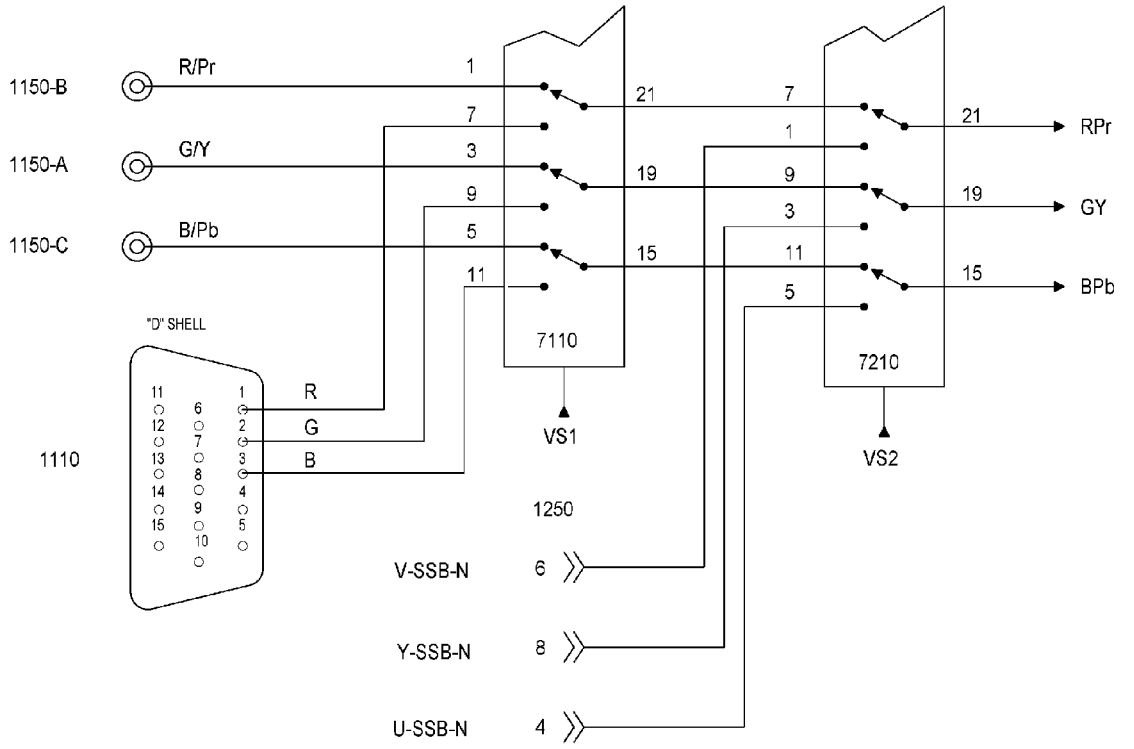

The input to the HOP panel can be RGB or Y Pb Pr via the cinch connectors or the D Shell connector. The D Shell connector is not present in the Basic or Basic Plus versions. The RGB or Y Pb Pr signal can be either 480P progressive scan or 1080I.

IC 7110 selects between the R/Pr G/Y B/Pb or the RGB signal from the D Shell connector. The output of 7110 is fed to 7210, which selects between the output of 7110 or the YUV signal from the SSM.

HOP Signal Processing

Figure 22

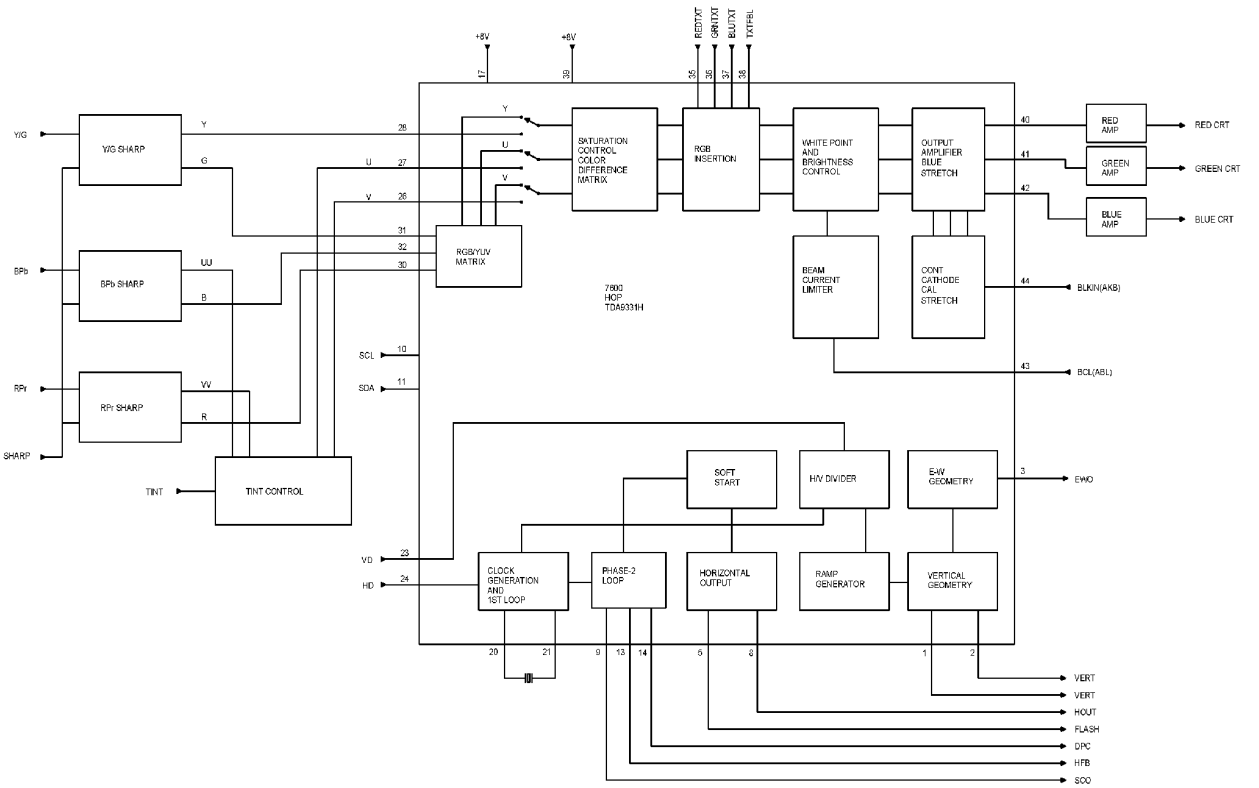

The Y/G, B/Pb, and R/Pr signals are fed to their respective sharpness controls. If the input is a YUV signal, the Y signal is fed to Pin 28 of 7600. The U and V signals are fed to the Tint Control circuit and then to Pins 27 and 26 of 7600. If the input is RGB, the signals are fed to Pins 31, 32, and 30 of 7600 to an RGB to YUV converter. When RGB input is used, there is no Tint control available for the signal.

The input selector switch in 7600 selects between the YUV on Pins 28, 27, and 26 or the output of the internal RGB/YUV converter. The signal is fed to the RGB insertion circuits where the OSD is inserted. The signal is then fed to a White Point circuit and then to the Output Amplifier. The White Point and Output Amplifier has the Drive controls and Cutoff controls. Input from the ABL line on Pins 43 makes adjustments in the brightness levels to adjust for changes in beam current. The AKB pulses from the CRTs are fed to Pin 44 to the Cathode Calibration circuit. The Cathode Calibration circuit adjusts the cutoff levels of the CRTs to maintain the correct gray scale tracking. When the set is first turned On, a calibration pulse is output on the RGB lines. The Cathode Calibration circuit monitors this pulse on the AKB line to set the Black level and the maximum drive voltage for the cathode. Once the Calibration has taken place, the Output Amplifier switches to the RGB drive signal as the output.

Horizontal and Vertical Sync is fed to 7600 on Pins 23 and 24. IC 7600 processes the sync to provide the geometry for the picture. Horizontal drive is output to the sweep circuit on Pin 8. Vertical drive is output on Pins 1 and 2. East West drive is output on Pin 3. Sandcastle (SCO) is output on Pin 9. Horizontal Feedback (HFB) from the sweep circuit is fed into the Phase Loop to phase correct the Horizontal drive.

IC 7600 is controlled by the Microprocessor via the I2C buss on Pins 10 and 11. Geometry and Drive settings are stored in the Memory IC located on the HOP panel.

HOP Sharpness Control

Figure 23

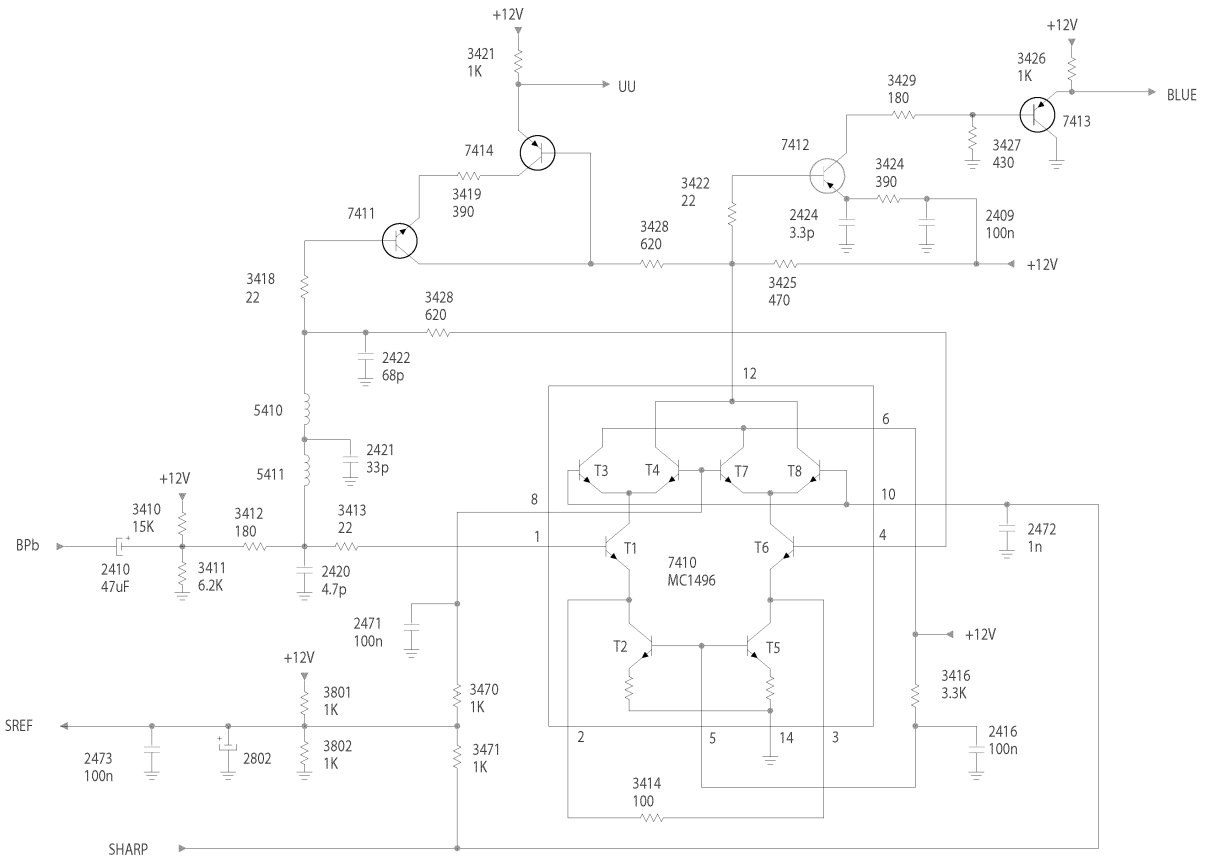

The Sharpness controls for the YUV/RGB signals are located on the HOP panel. Since all three circuits are basically the same, only the Blue one will be discussed.

The Blue signal is fed to Pin 1 of 7410. It is also fed to a Low Pass filter consisting of 5411 and 5410. This path is amplified by transistor 7411. The Low Pass filter blocks the Higher frequencies as well as shifting the phase of the signal. The output of the Low Pass filter is also fed to Pin 4 of 7410. The mixing of these two-phase shifted signals only allows the High frequency component to be amplified and output on Pin 12. The gain of the High frequency component is controlled by the Sharpness voltage, which is applied to Pins 8 and 10. The two signals are combined at Pin 12 of the IC. If the input is a Blue signal it is amplified by 7412 and buffered by 7413. If the input is a U signal, it is buffered by 7414.

HOP Tint Control

Figure 24

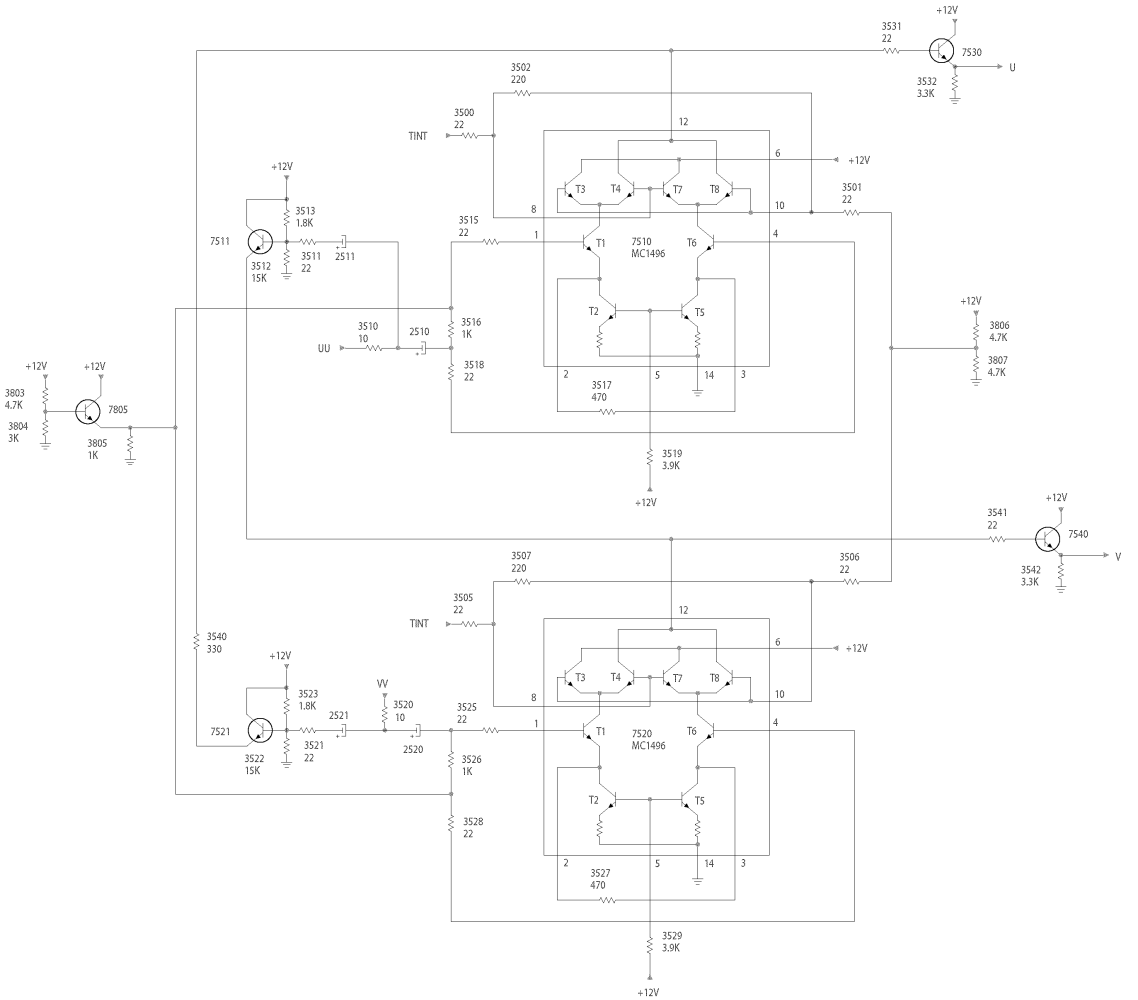

IC 7510 amplifies the U signal while 7520 amplifies the V signal. The Tint control voltage changes the balance between the U and V signals to change causing the tint of the picture to change.

RGB Amplifiers

Figure 25

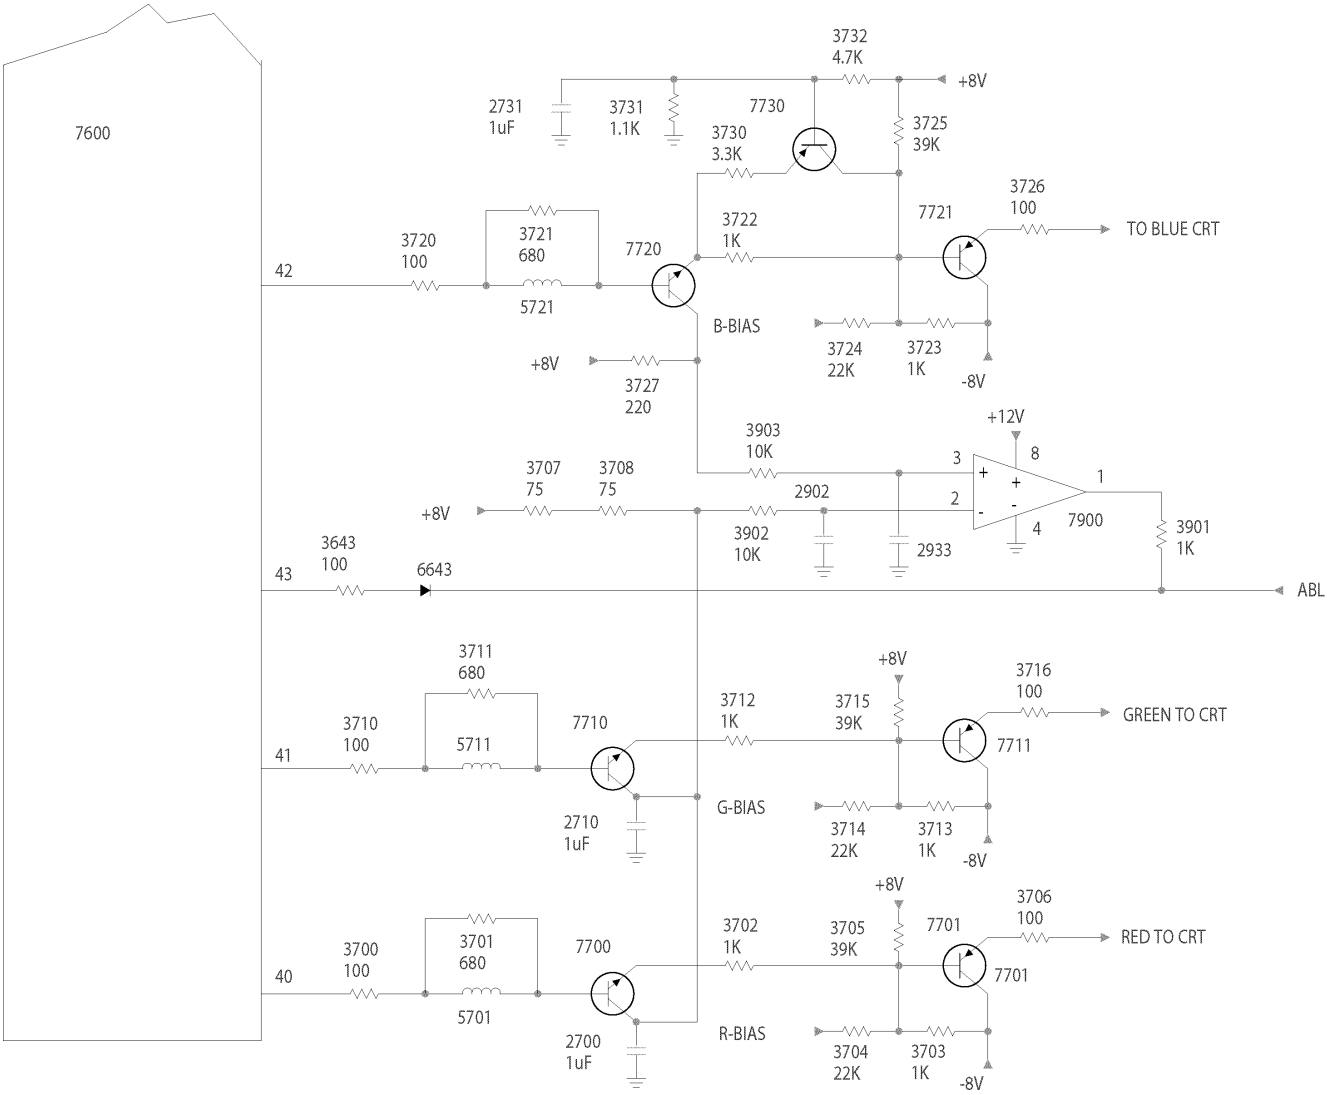

The output of 7600 is fed to the RGB amplifiers before being fed to the CRTs. Transistors 7720 and 7721 buffer the Blue output on Pin 42. The B-BIAS control voltage controls the gain of this circuit. Transistors 7730 provide an additional voltage gain for the signal.

7710 and 7711 buffers the Green output from Pin 41 of 7600. The G-BIAS controls the gain of the circuit.

The Red output from Pin 40 of 7600 is buffered by 7700 and 7701. The R-BIAS controls the gain of the circuit.

The drive of the Red and Green outputs are compared with the Blue drive by 7900-A. The difference signal is fed back to 7600 via the ABL line. If the Blue CRT is driven harder than the Green and Red CRTs, the inverting input on Pin 2 will become greater than the non-inverting input on Pin 3, resulting in the output on Pin 1 to go Low. The ABL line will go Low, causing 7600 to reduce the drive to all of the CRTs. This circuit prevents the Blue tube from being over driven.

HOP Analog Control

Figure 26

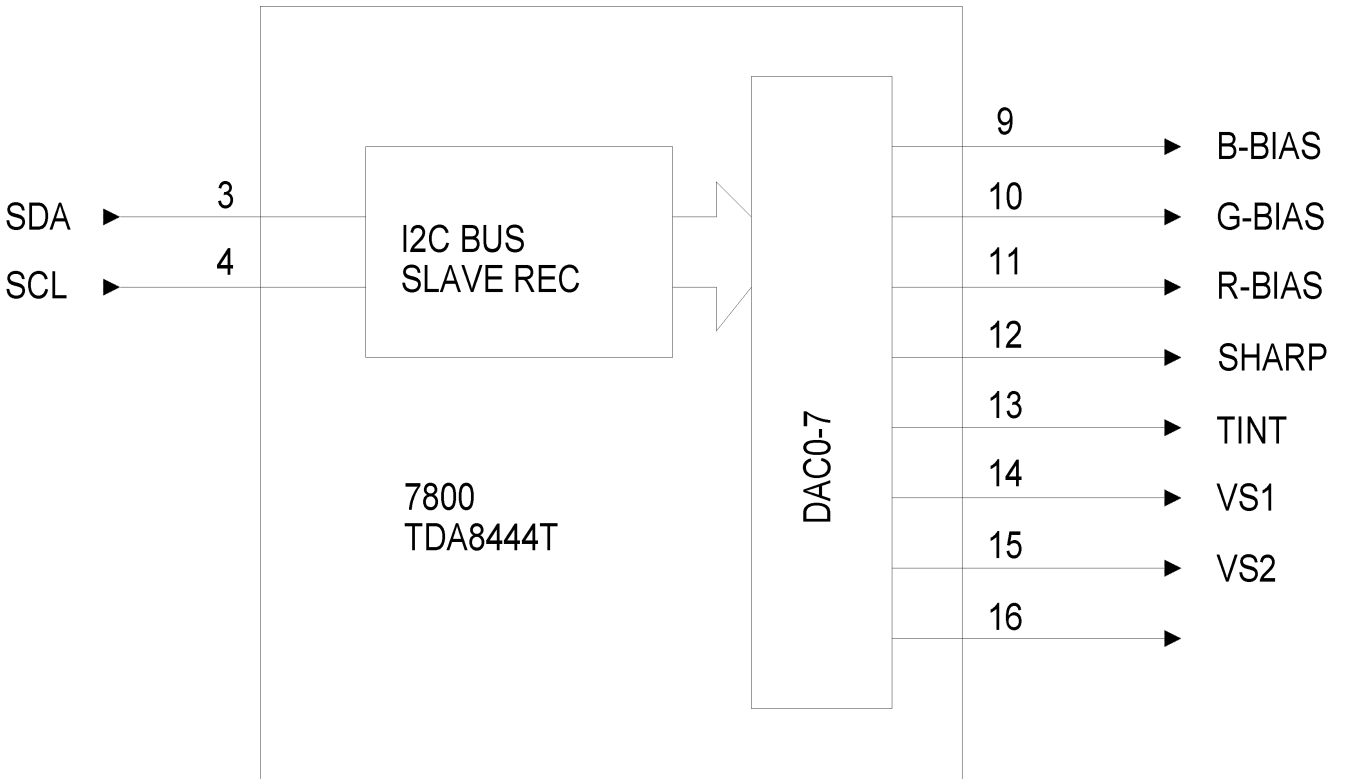

IC 7800 develops the analog control voltage for the HOP panel. The I2C bus controls the IC. This IC is located on the HOP panel. The Microprocessor that controls this IC is located on the ACS module.

CRT Panel

Figure 27

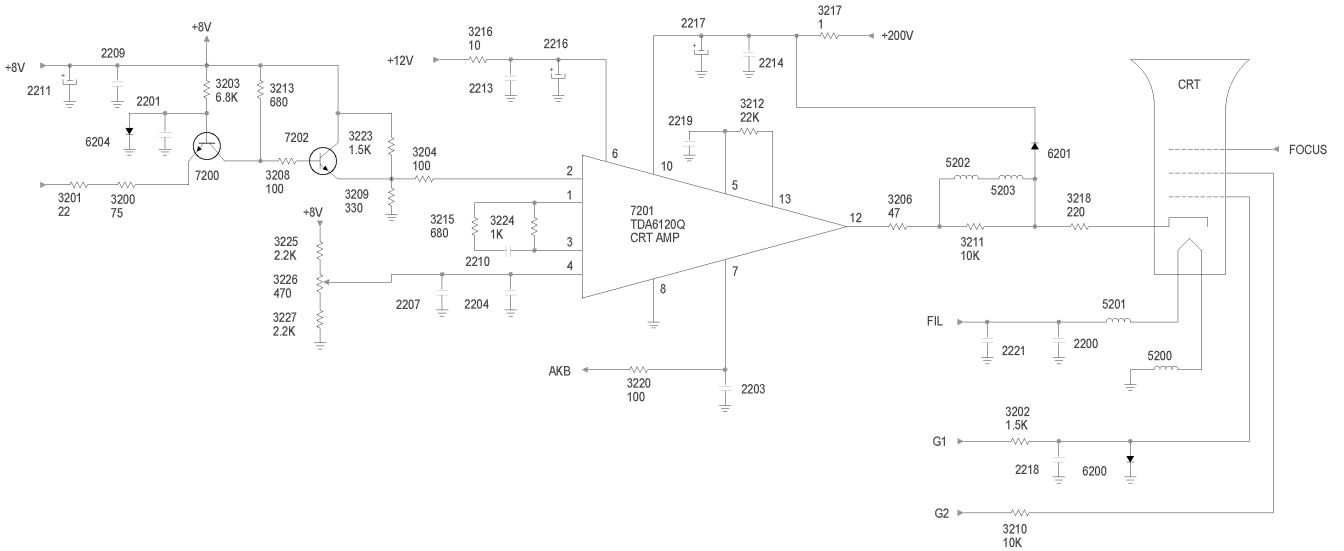

The Red, Green, and Blue signals from the HOP panel are fed to their respective CRT panel. The signal is fed to the emitter of 7200 and then to 7202. The output of 7202 is fed to Pin 2 of 7201, which drives the cathode of the CRT. AKB drive is output on Pin 7 and fed to the HOP panel.

HOP Sync Switching and Processing

Figure 28

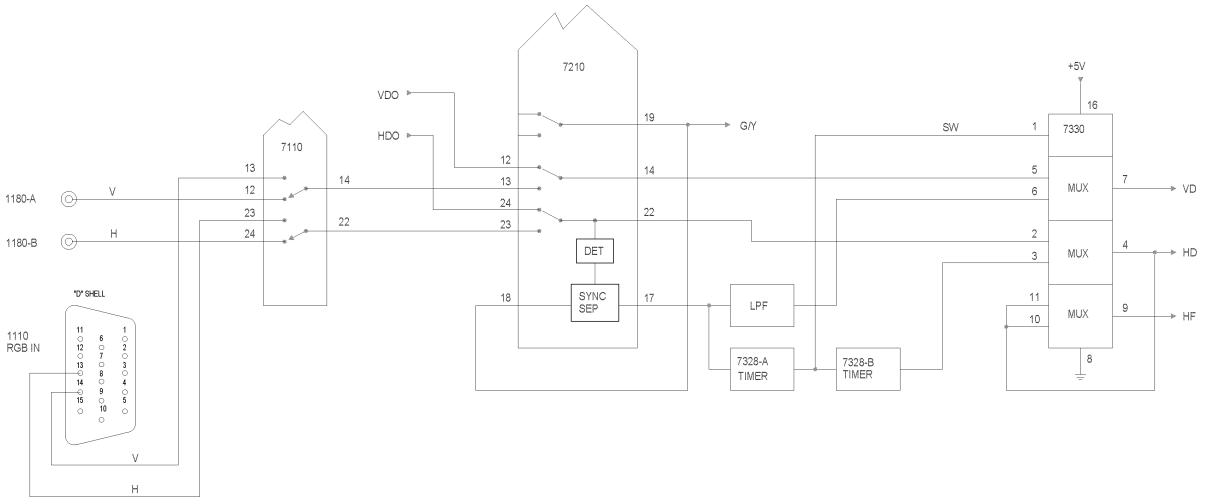

Horizontal and Vertical Sync from the SSB is fed to the HOP panel via the SSM panel when NTSC is used as the signal source. In sets with the D Shell RGB input, 7110 switches between the Vertical and Horizontal Sync on the cinch connectors or the Sync from Pins 13 and 14 of the D Shell connector. IC 7210 selects between the output of 7110 and the Sync from the SSB. For separate Horizontal and Vertical Sync, the output of 7210 is fed to the multiplexer IC 7330, which is used as a switch. In the case of Sync on Y or Sync on Green, Pin 19 of 7210 is fed to Pin 18 of 7210 to a Sync Separator. If separate Horizontal Sync is present, the internal detector in 7210 turns the Sync Separator Off. The Sync output on Pin 17 is fed to a Low Pass Filter, which separates the Vertical Sync. The Timer IC,7328, detects the Horizontal Sync and feeds it to 7330. The detected Horizontal Sync from 7328 is fed to Pin 1 of 7330 to switch the IC to the Pin 6 and 3 inputs.

Horizontal Output

Figure 29

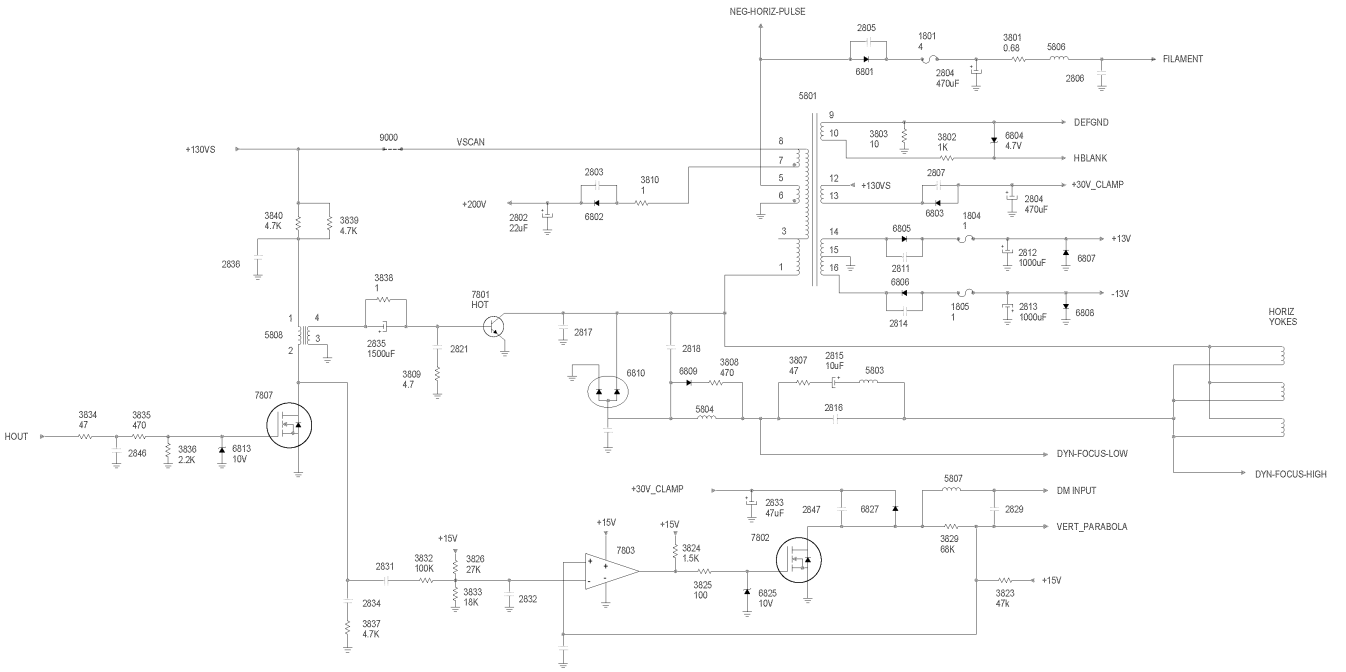

Horizontal drive from the HOP panel is fed to 7807 on the Large Signal panel. Transistor 7807 drives the Horizontal Output Transistor,7801, which drives the Yokes and the Horizontal Output Transformer 5801. Transformer 5801 produces a plus and minus 13-volt supply for the Vertical Output circuit. It also produces a 200-volt source and Filament voltage for the CRT panels. The output of 7807 also drives 7803 and 7802, which drives the Dynamic Focus circuit.

Vertical Output Amplifier

Figure 30

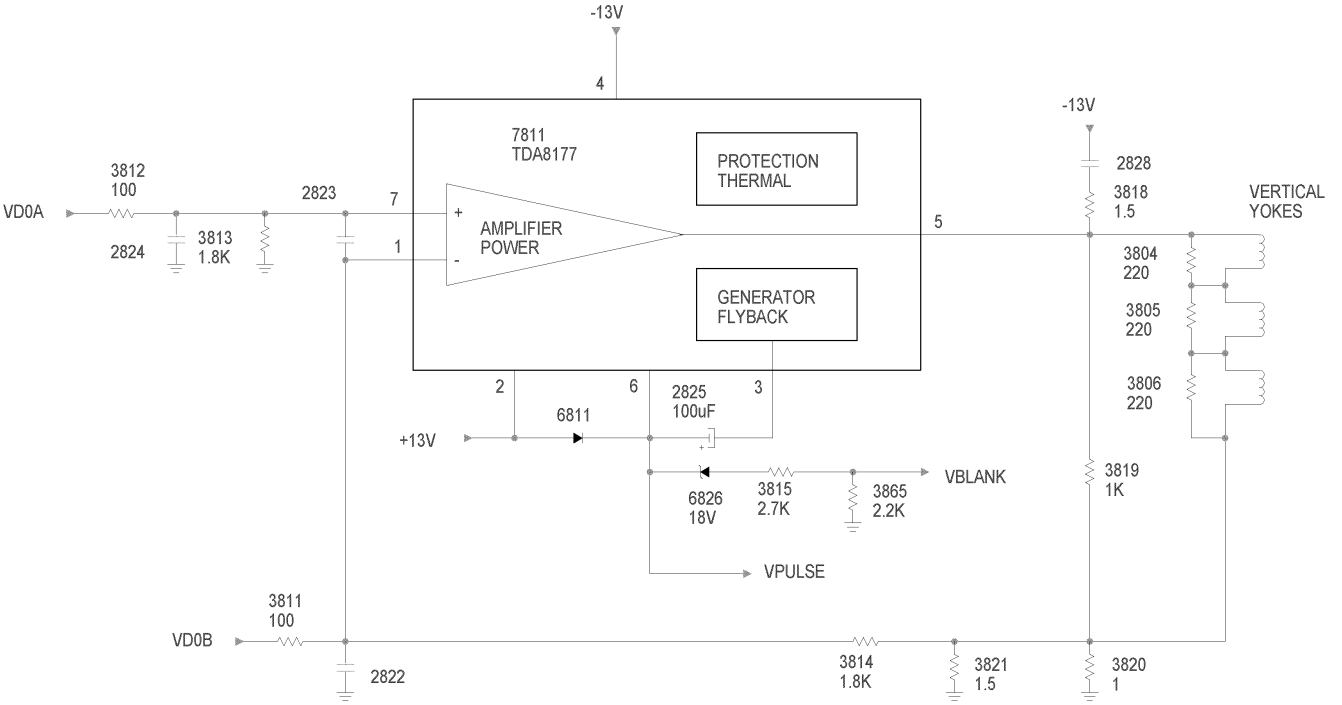

The Vertical drive from the HOP panel drives the Vertical Output IC 7811. This IC is located on the Large Signal panel. Drive is fed to Pin 7 and is output on Pin 5 to drive the three Vertical Yokes. This IC is powered by the plus and minus 13-volt supplies from the Horizontal Output circuit. A Vertical pulse on Pin 6 is fed to the sweep failure detection circuit. If there is a failure in the Horizontal or Vertical sweep, the High Voltage will be shut down.

High Voltage Circuit

Figure 31

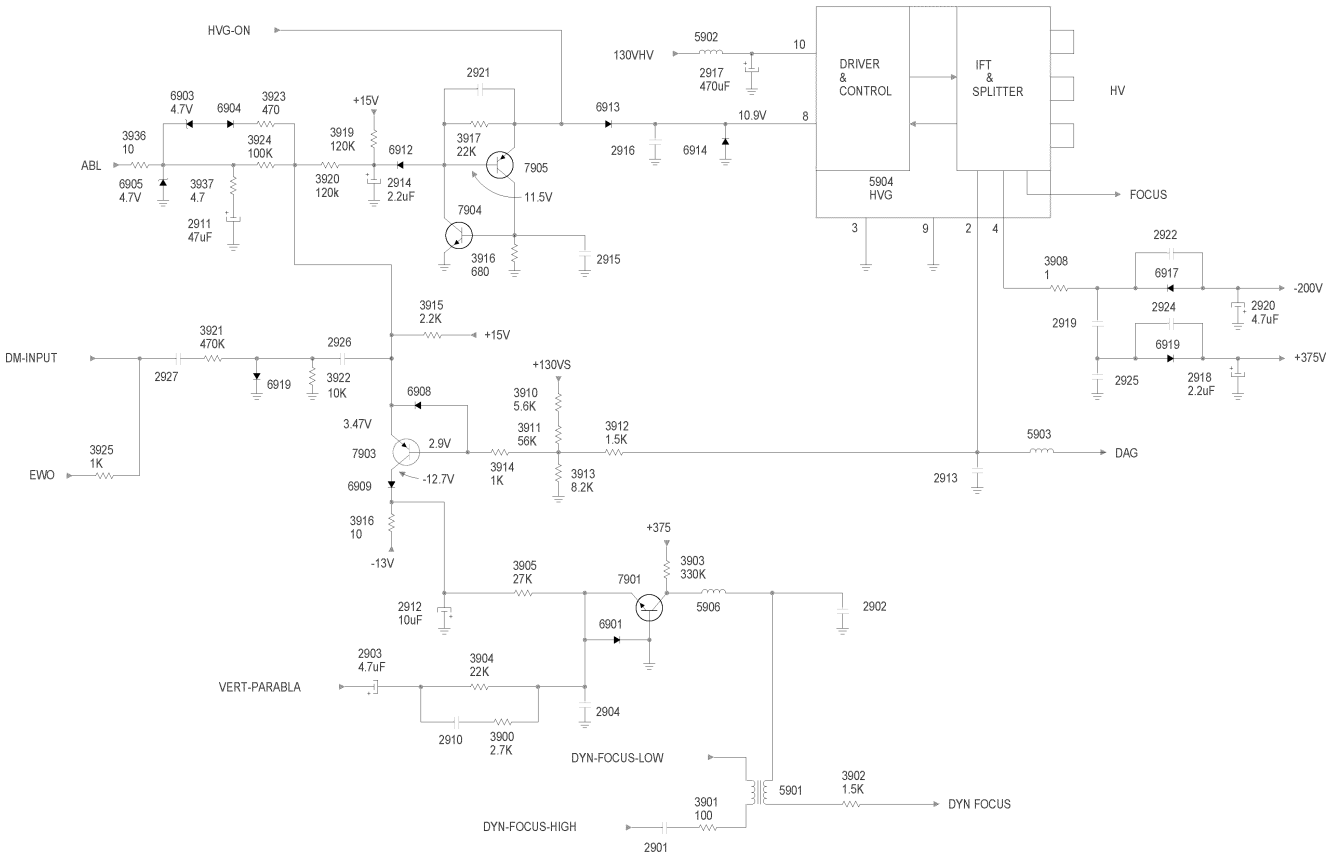

The High Voltage module is an integrated High Voltage supply with its own switching power supply. When the set is turned On, 11.5 volts from the Sweep Failure detection circuit is fed to diode 6913 and to Pin 8 of the High Voltage module. A supply voltage of 130-volts is also fed to Pin 10 of the module. The Module then outputs High voltage to the three CRTs. It also outputs Focus voltage to the Focus G2 block. Output on Pin 4 is rectified by 6917 to produce a negative 200-volt source for the CRT G1 voltage. The voltage is also rectified by 6919 to produce a 375-volt source for the Dynamic Focus drive. The Dag line along with the output on Pin 2 is connected to 7903 to produce the ABL voltage for the set. If an overcurrent condition should develop with the drive, the ABL voltage will go Low, turning 7905 On, latching 7904, which will remove drive to Pin 8 of the HVG. This will cause the High voltage to shut Off. Vertical Parabola drive is fed to 7901 to produce the Vertical component of the Dynamic Focus drive.

High Voltage Shutdown

Figure 32

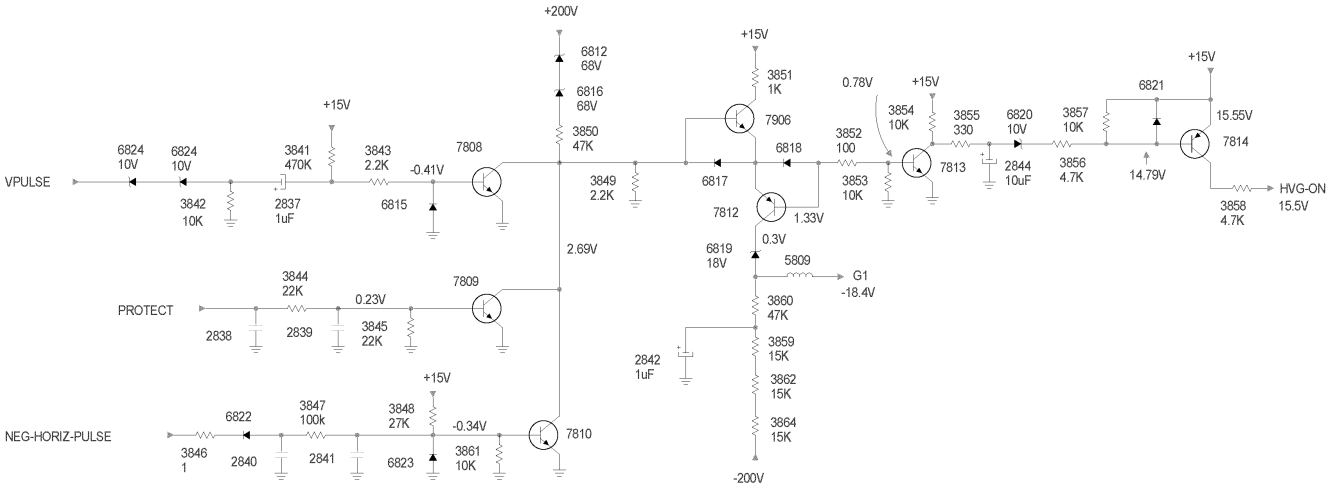

The Shutdown circuit will shut the High voltage Off if the Horizontal or Vertical Sweep should fail. It will also shut the High voltage Off if the Power Fail line goes High or the +200-volt source should fail.

The Vertical pulse is fed to zener diodes 6824 and 6814, which keeps capacitor 2837 charged. This pulse is rectified by 6815 to keep the base of 7808 at a negative voltage. This keeps the transistor turned Off. In the same manner, the Negative Horizontal pulses keep the base of 7810 at a negative voltage to keep it turned Off. The Protect line is normally Low, keeping 7809 turned Off. The +200-volt source is fed through zener diodes 6812 and 6816, resistor 3850, the base-emitter of 7906, and the base emitter of 7812 to keep transistor 7813 turned On. This turns transistor 7814 On, which switches the On voltage to the High Voltage module. The conduction of 7812 keeps the voltage on the G1 line at approximately -18-volts, which turns the CRTs On. If the Vertical Pulse should fail, transistor 7808 will turn On, which will turn 7906, 7812, 7813, and 7814 Off. This will turn the HVG module Off. In addition when 7812 turns Off, the G1 voltage will go to a -200 volts, blanking the CRTs. The same sequence will occur if Horizontal should fail, the Protect line should go High, or the +200-volt source should fail.

Convergence

The Convergence system is split into two sections. The convergence signal processor is located on the ACS (Auto Convergence System) module. The output amplifiers are located on the SSM.

Convergence Processor

Figure 33

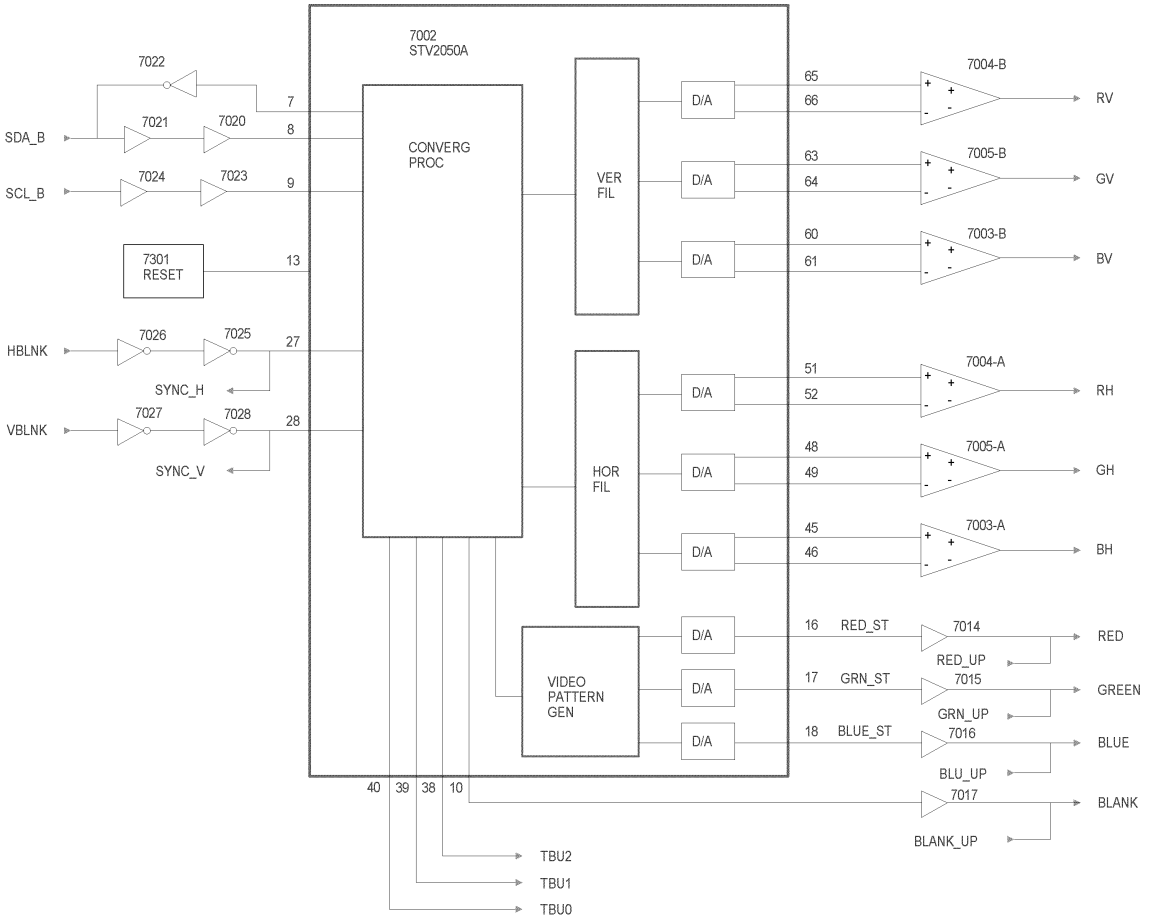

The Convergence data is stored in the EEPROM, 7000. The Microprocessor located on the ASC module reads 1,971 bytes of data from 7000 and writes it to the Convergence Processor, 7002. Horizontal sync is inverted by 7026, buffered by 7025, and fed to Pin 27 of 7002. Vertical sync is inverted by 7027, buffered by 7028, and fed to Pin 28 of 7002. The data is processed to produce the desired convergence correction waveforms which are output on six DACS. During the convergence adjustment procedure, a 180 point alignment grid is output on Pins 16, 17, and 18. This signal is mixed with the OSD to be displayed on the screen. In the 4x3 aspect ratio set, there are three sets of convergence data. In sets with a 16x9 aspect ratio, there are two sets of convergence data. The set will require convergence alignment for each set of convergence data. The correct mode must be selected and the signal for that mode must be applied to the set during the convergence alignment. The output of the DACS is fed to six op-amps before being fed to the Power Amplifiers located on the SSM. When screen centering is being performed, it is necessary to disable the convergence drive waveform. A High on Pin 77 turns transistor 7029 On, turning 7038 On, which turns transistors 7032, 7033, 7030, 7031, 7034, and 7035 On. This mutes the correction drive signal to the Power Amplifiers.

Intellisense Convergence Correction

Figure 34

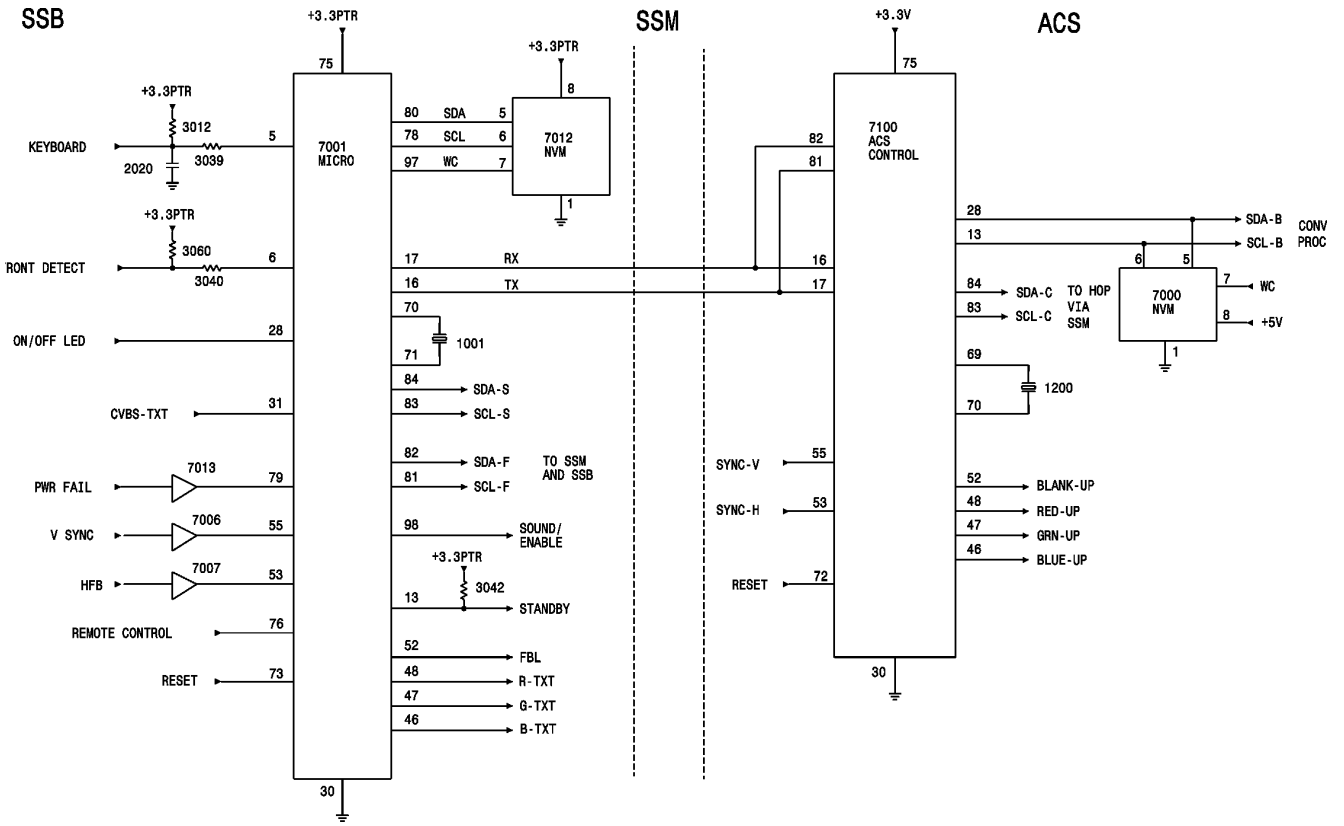

The Philips Intellisense system makes minor Convergence corrections when the feature is selected by the Customer. When a PTV is moved from one location to another, minor Convergence errors will occur due to changes in the Earths magnetic field. When Save is selected during the Convergence Alignment, the set scans four optical sensors with each of the three colors. The locations of these sensors are recorded by the ACS Microprocessor. When the Customer selects the Intellisense feature, the sensors are again scanned and the rotation of the beams for each color is adjusted to the recorded values.

Intellisense Sensing Circuit

Figure 35

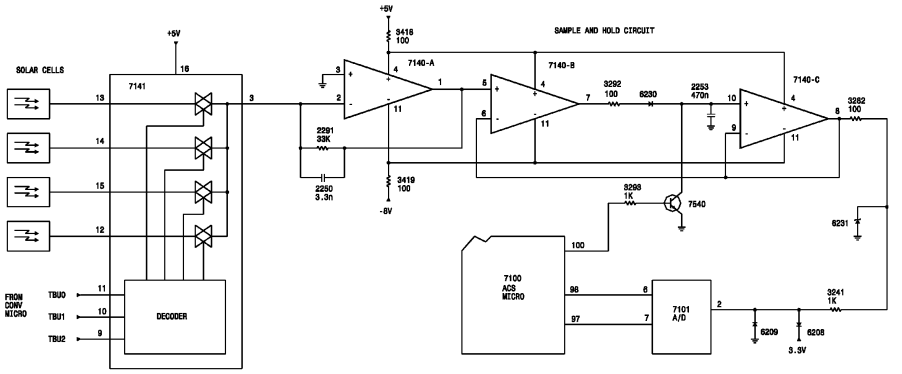

The output of the four sensing Solar Cells are fed to IC 7141 located on the ACS module. Inputs TBU0, TBU1, and TBU2 from the Convergence Microprocessor are fed to the Decoder which selects the Solar Cell to be read. The output on Pin 3 is fed to Pin 2 of 7140-A. 7140-A matches the low impedance output of 7141 to the high impedance input of 7140-B. Amplifier 7140-B charges capacitor 2253 with the sample voltage. Due to the high input impedance of 7140-C, 2253 will hold the sample voltage until it is cleared by transistor 7540. The output of 7140-C is fed to 7101 which is an Analog to Digital converter. The Digital reference voltage is fed to the ACS microprocessor where the data is processed and recorded. When the next location requires sampling, a High is output on Pin 100 of 7100. This turns Transistor 7540 On discharging capacitor 2253.

The Basic version of the HDRPTV does not have the Sensors installed in the set. However, the Sensor Test is in the Service Convergence menu. When the Convergence alignments are stored, the Microprocessor will attempt to read the Sensors. If the Sensor test is selected in the Convergence Alignment menu, the message will read “Sensors not verified at locations: 1234.” This will not affect the Convergence alignments.

Convergence Horizontal Output

Figure 36

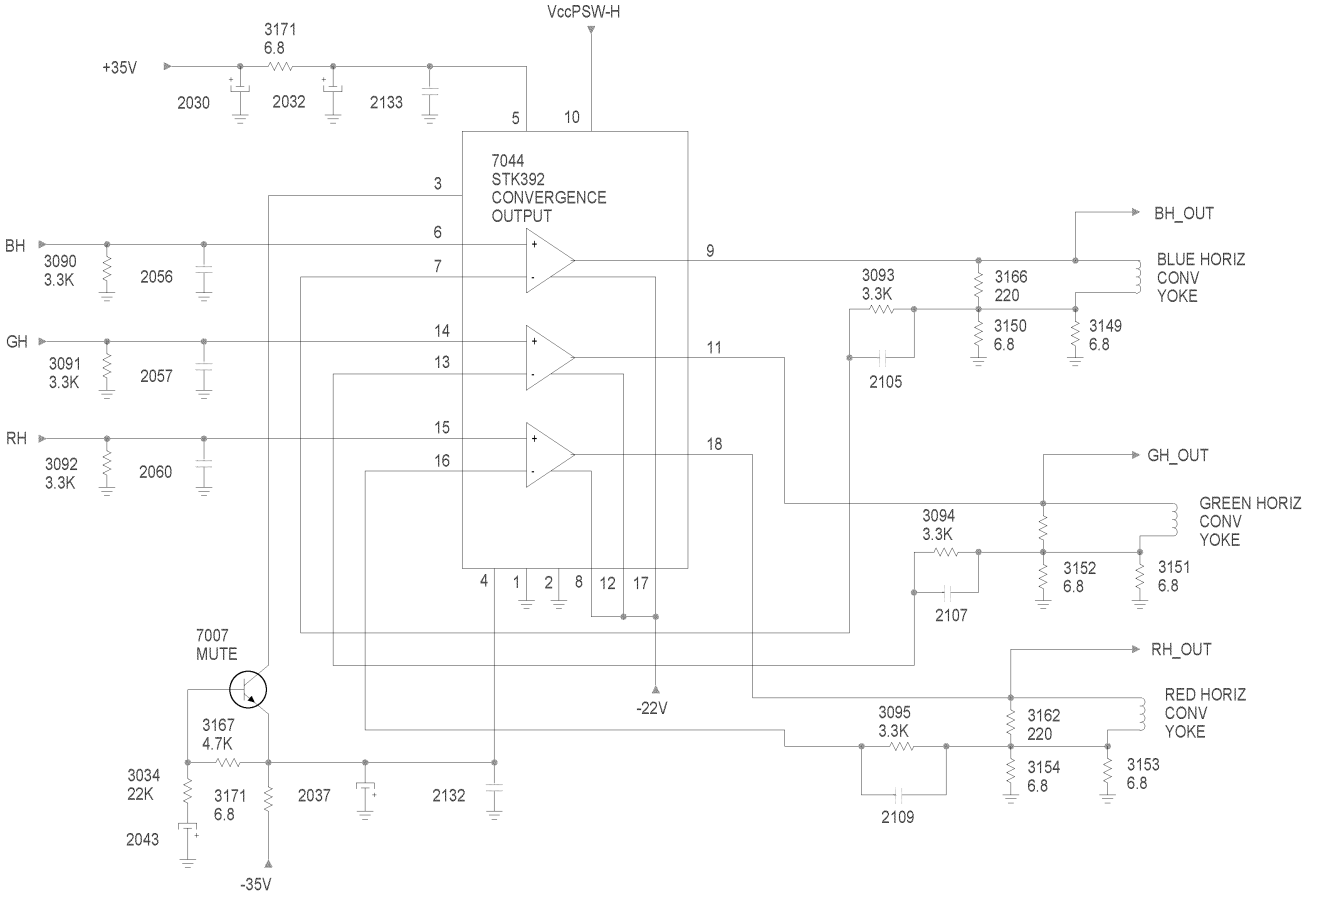

IC 7044 amplifies the Horizontal convergence waveforms. The correction waveforms are fed to the IC on Pins 6, 14, and 15. They are output to the Convergence Yokes on Pins 9, 11, and 18. The IC is powered by four supply inputs. A +35 volt supply is fed to Pin 5, a -35-volt supply is fed to Pin 4, and a -22-volt supply is fed to Pin 8, 12, and 17. The supply fed to Pin 10 is normally a +22-volt supply. During signal peak drives, the voltage on Pin 10 is increased to +35-volts. Feedback sense voltage is developed across the 6.8 ohm resistors on the return side of each yoke. Transistor 7007 is part of a Soft Start circuit. When the set is turned On, Transistor 7007 turns On until capacitor 2043 is fully charged. While 7007 is being turned On, a negative voltage is placed on Pin 3 muting the output of the IC. A 220-ohm snubber resistor is across each of the yoke windings. This resistor will overheat if the unit is operated with the Convergence Yokes unplugged.

Audio

Overall Audio Block

Figure 38

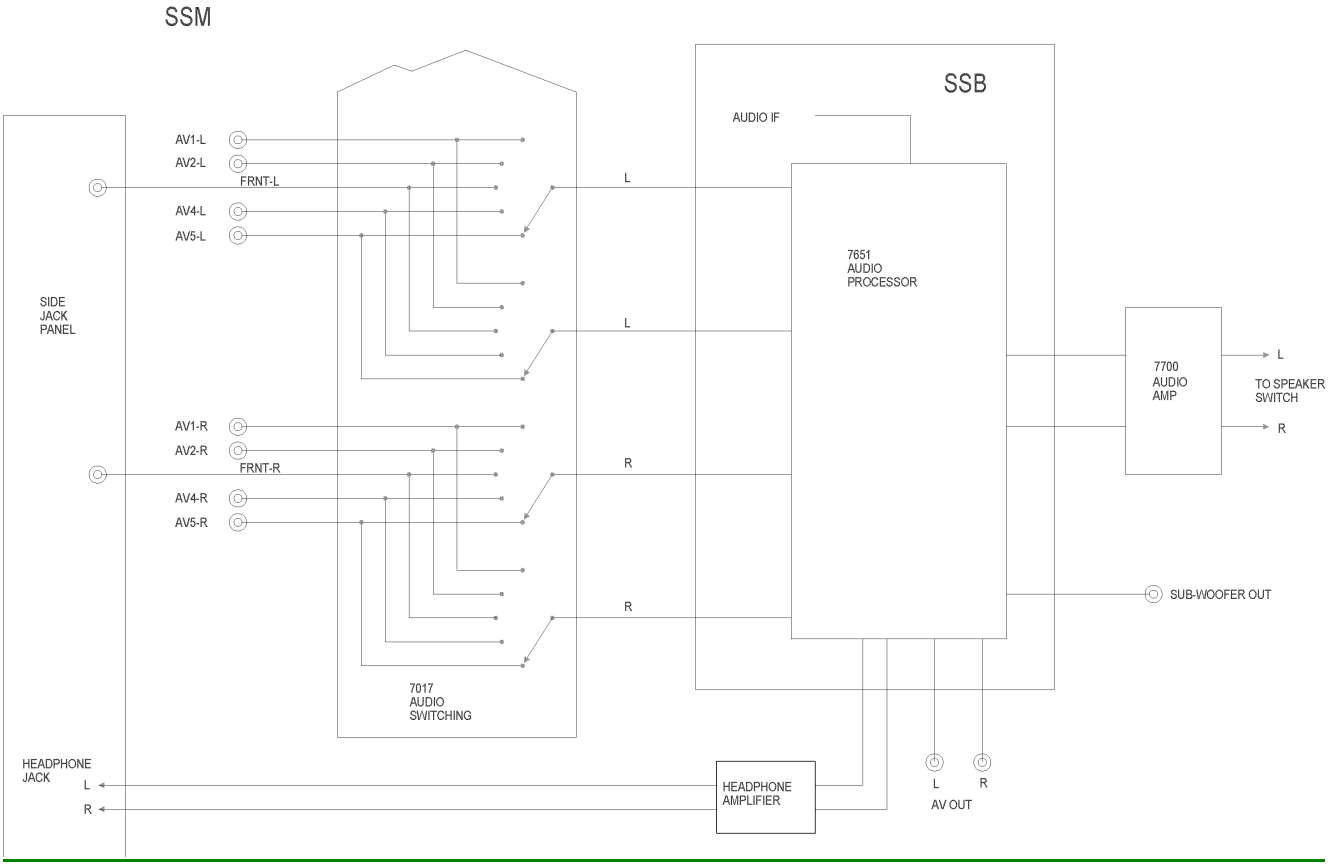

IC 7017 located on the SSM selects Left and Right channels of audio and feeds them to the Audio Processor, 7651, located on the SSB panel. The Audio processor selects between the two audio channels from the SSM or internally decoded audio from selected audio IF on the SSB. The Processor outputs line level Left and Right monitor audio and line level Sub Woofer out. These jacks are located on the SSM. It also outputs Left and Right audio to the Audio Amplifier, which is located on the SSM. Left and Right audio is output to a Headphone Amplifier located on the SSM. The output of the Headphone Amplifier is fed to the Side Jack Panel.

Audio Amplifier

Figure 39

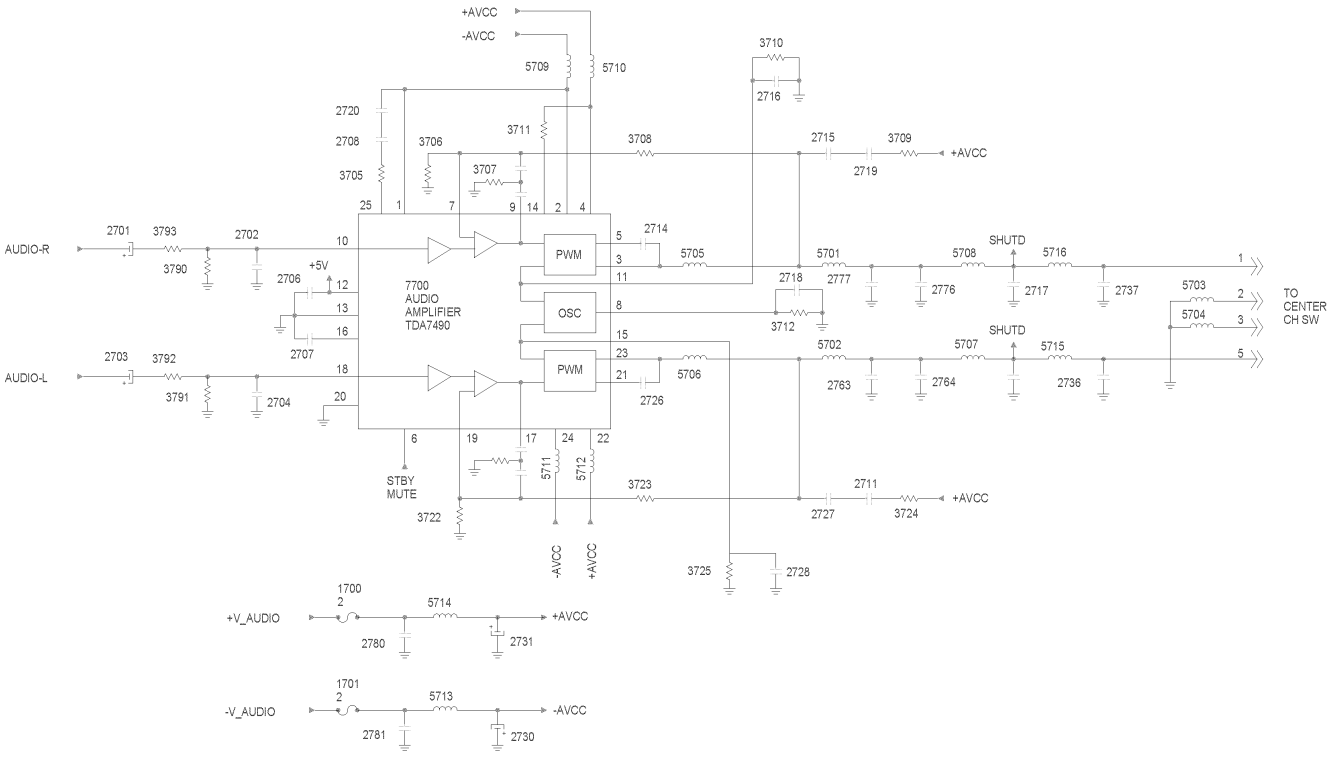

The Audio Amplifier is located On the SSM. The output power for the Audio Amplifier is 10 watts per channel for the Basic and Basic Plus versions. The Core Version has an output of 15 watts per channel. IC 7700 is the Audio output IC. This is a class D amplifier. Left and Right Audio from the SSB is fed to Pins 10 and 18 of the IC. The output stages are basically a switch mode supply, which is driven by a 200 KHz oscillator. The Right Channel pulse width signal is output on Pin 3. The output is filtered by 5701, 2777, 2776, 2717, 5716, and 2737. The amplified audio is output on connection 1349. In the same manner, Left audio is output on Pin 23. The IC is powered by +19 and -19 volt supplies. The supplies are protected by fuses 1700 and 1701. The Supply voltage for the Core version is 4 volts higher than the Basic and Basic plus version. The extra supply voltage is needed to produce the additional 5 watts per channel output.

Muting and volume control for the audio takes place in the Audio Signal processor on the SSB. The STBY MUTE line on Pin 6 goes to 2.5 volts to mute the audio when the set is turned On or Off. This line goes Low to place the amplifier in a Standby mode if a DC voltage is detected on the Audio Output lines.

Shutdown Mute

Figure 40

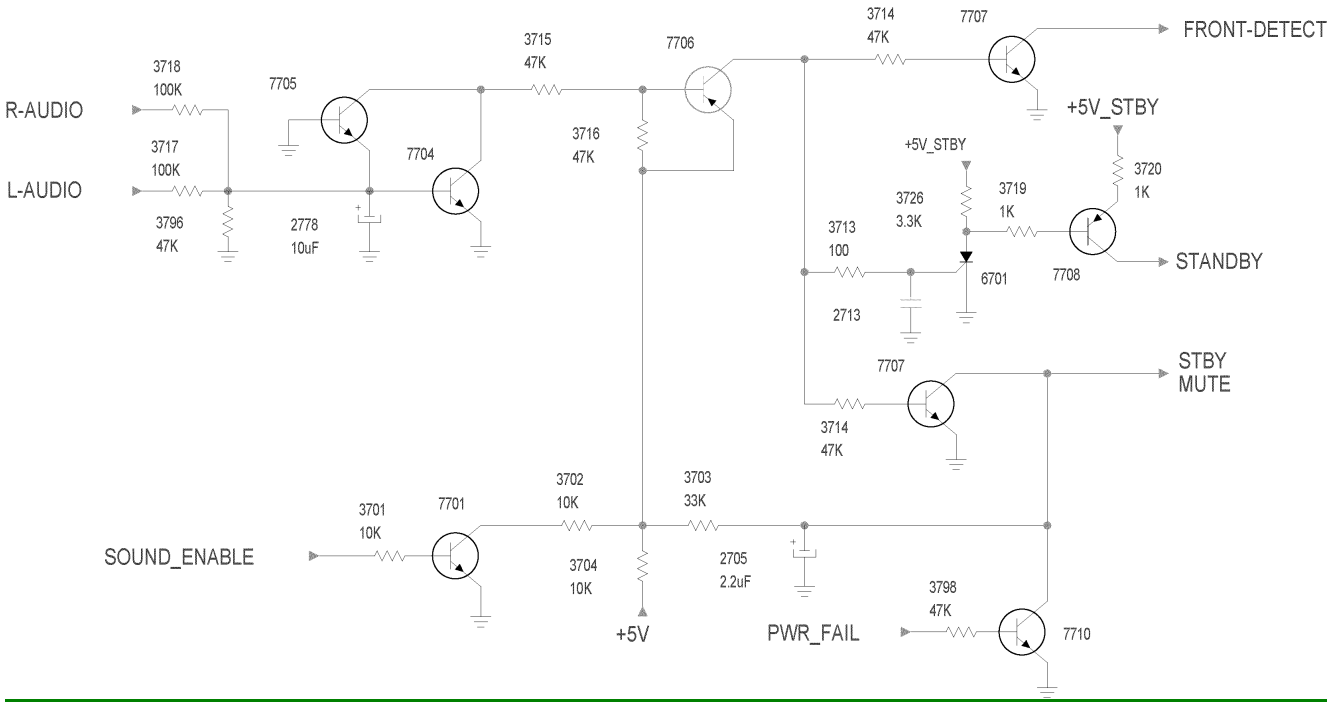

The Audio Amplifier will be placed in a Standby mode and the set will shut down if a DC voltage is detected on the Speaker Output lines. The Left and Right audio output lines are connected to the base of 7704 and the emitter of 7705 via resistors 3718 and 3717. Filter capacitor 2778 filters out the AC component of the waveform. If the DC voltage goes positive, 7704 will turn On. If the voltage goes negative, 7705 will turn On. This turns 7706 On. It also turns SCR 6701 On, turning transistor 7708 On, causing the Standby line to go High. If this SCR is turned On, it will be necessary to remove power from the set to reset the circuit. This will turn the set Off. Transistor 7707 also turns On, causing the Standby-Mute line to go Low. This places the Audio Output IC in a Standby mode. If the Power Fail line should go High, 7710 will turn On, causing the Standby-Mute line to go Low.

Center Channel Amp Switch

Figure 41

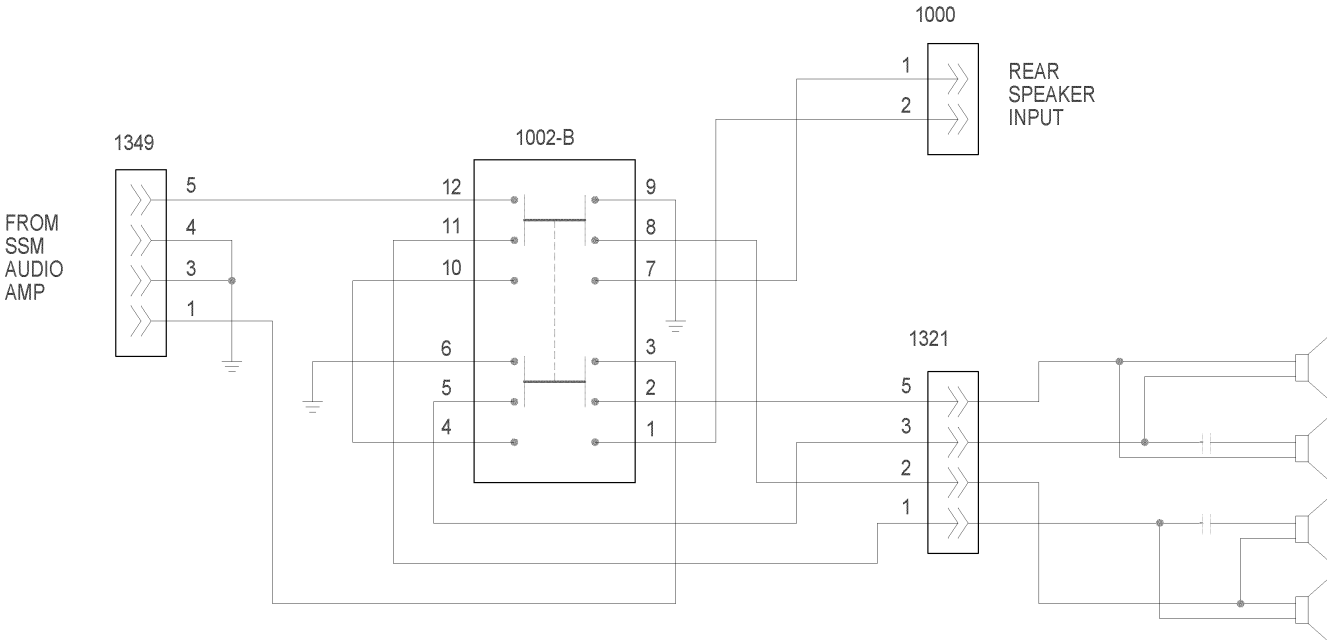

The Core versions have a Center Channel amp switch located on the rear of the set. The Output of the Audio Amplifier on the Basic and Basic Plus versions is fed directly to the speakers. In the Core sets, the Output is fed to the Center Channel amp switch before being fed to the speakers. When the Center Channel amp switch is placed in the External position, the Left and Right speakers in the set are placed in series with the external speaker input. In cases where the Customer has a separate sound system, this switch allows the speakers in the set to be used as the center output.

Headphone Amplifier

Figure 42

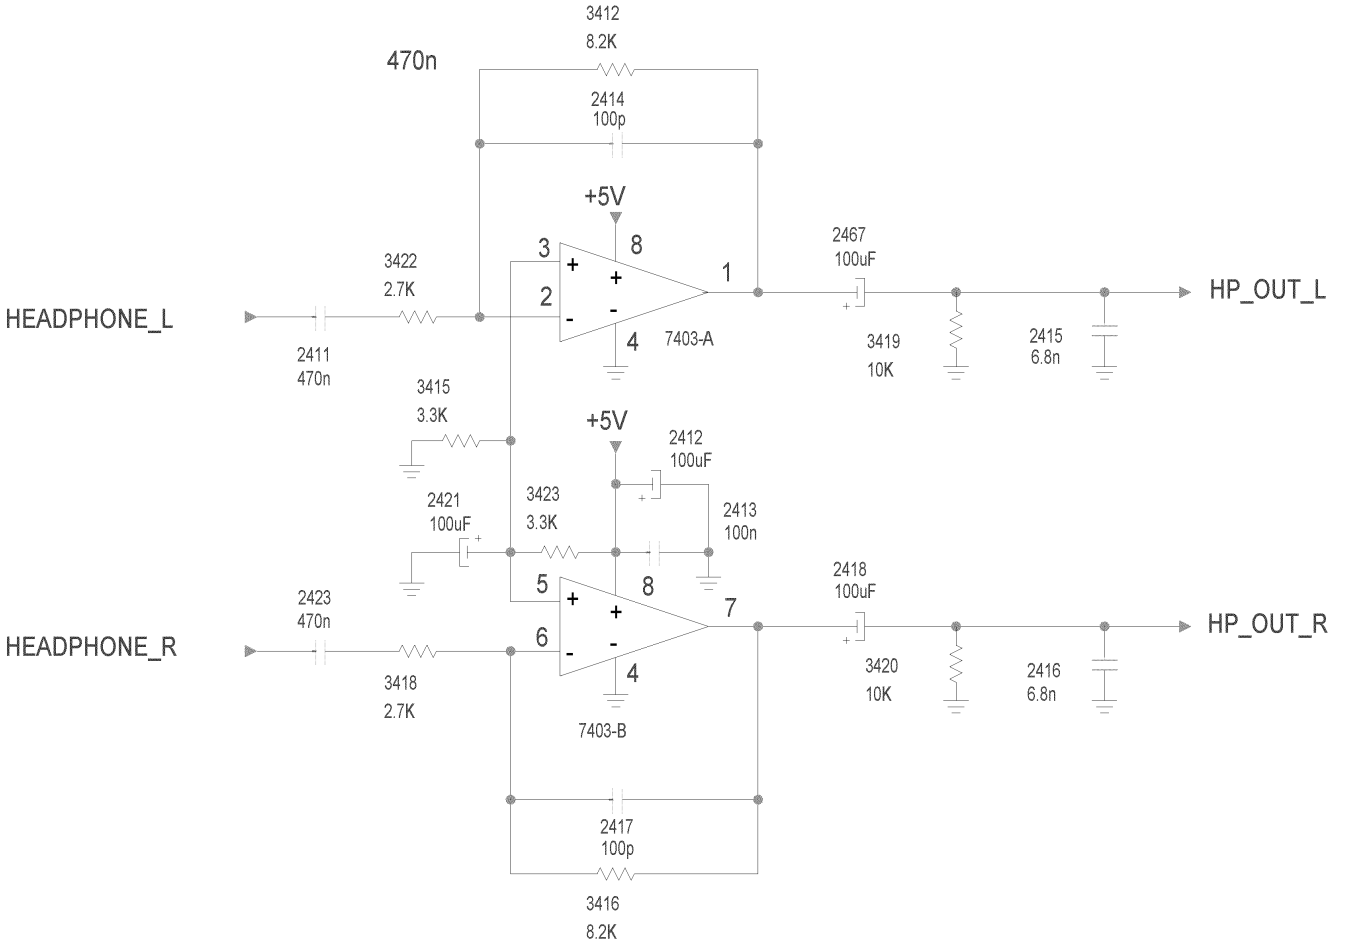

IC 7403 is the Amplifier for the Headphone output. The volume control for the Headphone output is on the Audio Signal processor located on the SSB. The Headphone Amplifier is located on the SSM. The output of the amplifier on Pins 1 and 7 is sent to the Headphone Jack located on the Side Jack panel.

Microprocessor

Figure 43

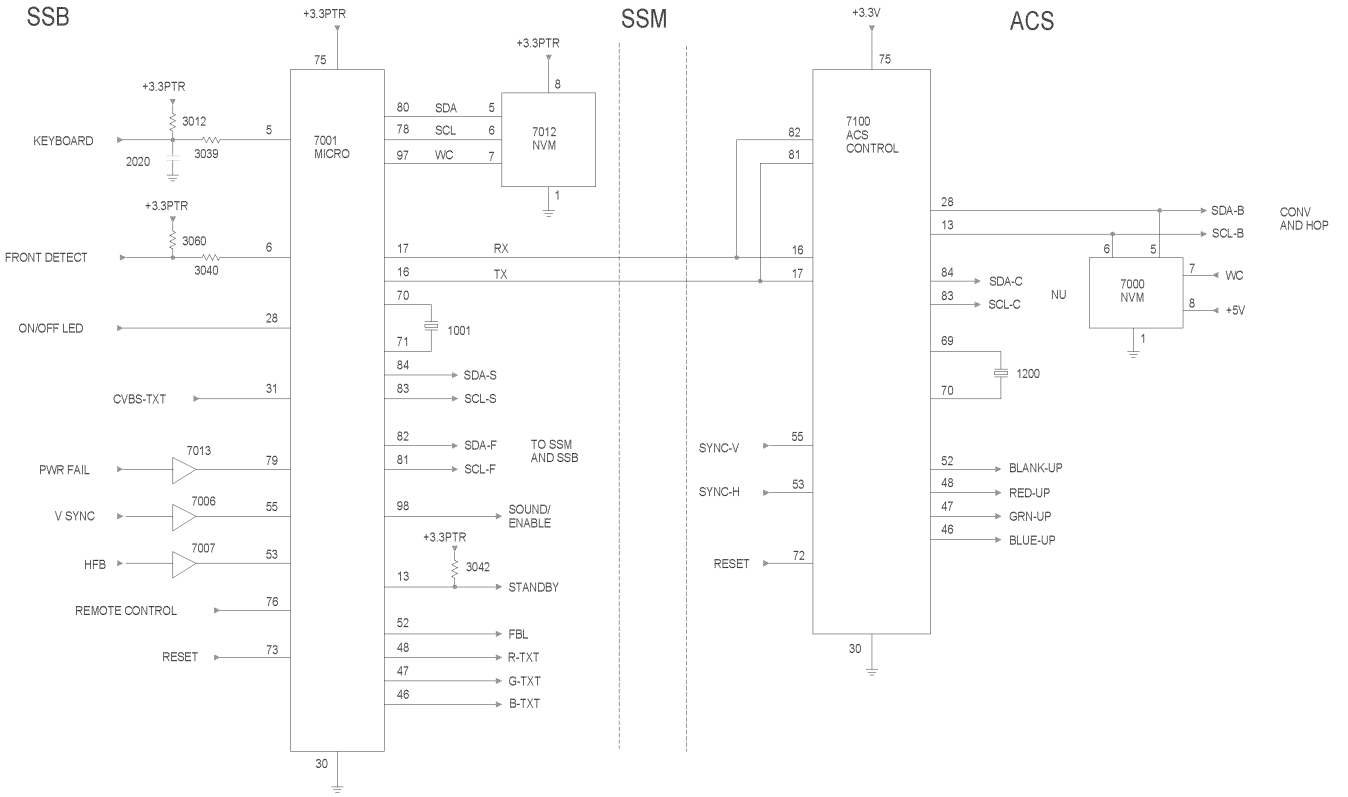

The HDR2002 has two microprocessors. The Microprocessor, 7001, on the SSB monitors the Keyboard and the Remote sensor during standby. This IC controls the Tuner, Video switching on the SSB, generates the consumer OSD.

Pin 5 of 7001 monitors the Keyboard for a voltage change to generate a command. The Front Detect line on Pin 6 monitors the AV inputs on the Side Jack panel. If a problem develops, the Front Detect will go Low, preventing 7001 from receiving any commands. The Power Fail input on Pin 79 goes High if the set looses power while the set is On. Composite Video is fed to Pin 31 for Closed Caption decoding. Horizontal and Vertical sync on Pins 53 and 55 synchronize the OSD and Closed Captions display signals, which are output on Pins 46, 47, and 48. Fast Blanking for the OSD is output on Pin 52.

There are three I2C busses on 7001. The Bus on Pins 78, 80, and 97 communicates with the Memory IC 7012. This IC stores Customer setup information, Option codes, and Error codes. I2C busses, S and F communicate with the Tuner on the PIP panel, and the ICs on the SSB. The S bus also controls the Tuner on the SSM and the Audio and Video switching on the SSM. Data lines on Pins 16 and 17 communicate with the Microprocessor on the ACS module.

IC 7100 controls the ACS module and the HOP module. The OSD output of 7100 displays the Convergence Service mode. Sync on Pins 53 and 55 synchronize the OSD. The A bus communicates with the Microprocessor on the SSB, the B bus communicates with the Memory IC,7000, and the Convergence processor. The C bus communicates with the HOP module via the SSM.

7001 SSB Power Supply and Reset

Figure 44

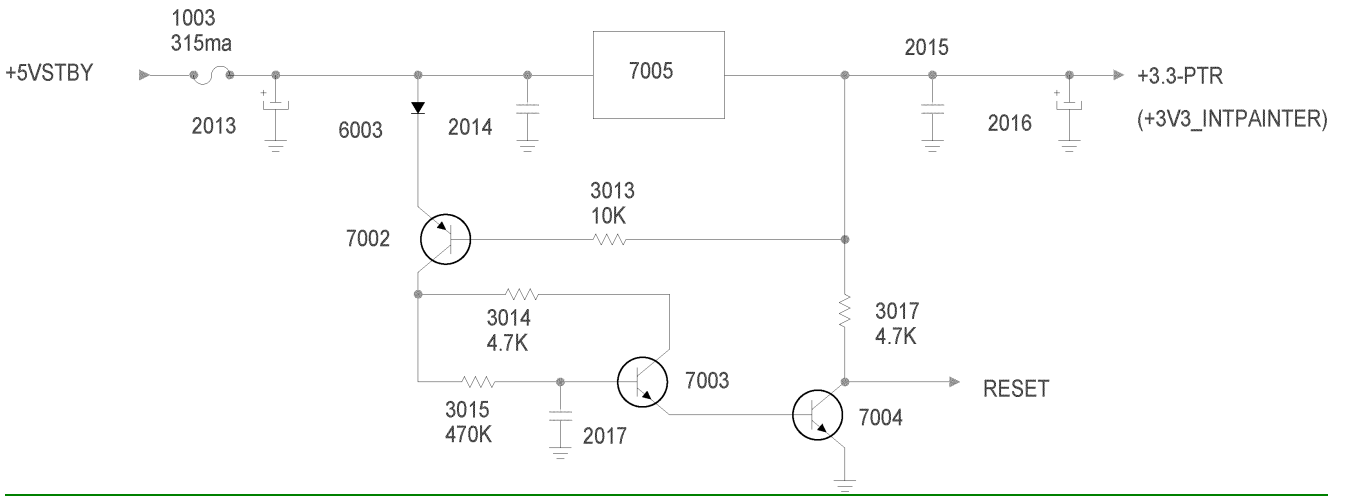

The Microprocessor on the SSB is powered by a 3.3 volt supply. The 5 volt standby supply feeds the 3.3 volt regulator IC 7005. This circuit is protected by fuse 1003. When the set is turned On, Transistor 7002 turns On. Transistor 7003 is delayed from turning On until Capacitor 2017 is charged. This delay allows 7004 to stay turned Off long enough for the Reset line to High via resistor 3017. When 2017 is charged, 7003 turns On, turning 7004 On. The Reset line then goes Low and stays Low.

On-Screen Display

Figure 45

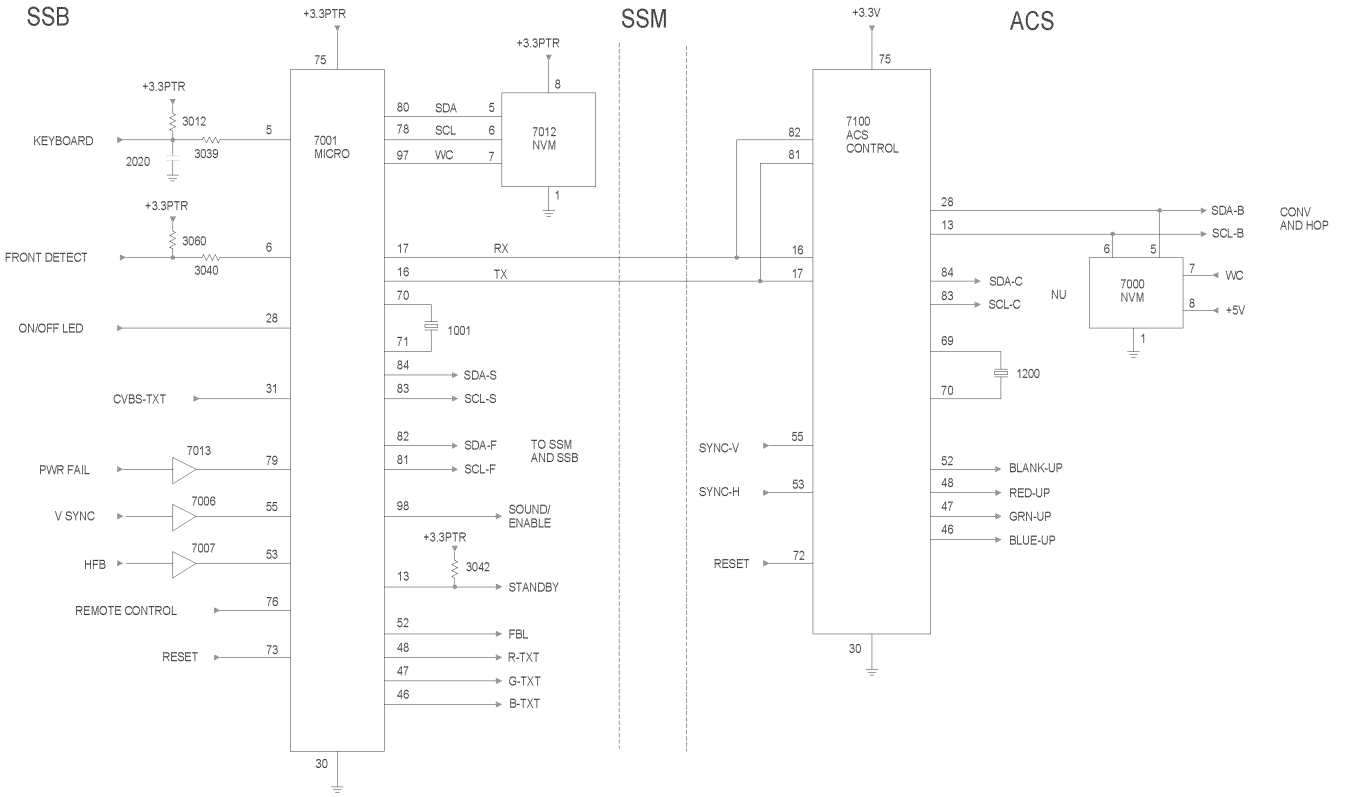

Signal for the OSD (On-Screen Display) comes from three different sources.

IC 7001 located on the SSB (Small Signal Board) generates all the customer menus except for Convergence.

In the SAM (Service Alignment Mode), the menus are generated by 7001 except those in the GDE SAM. The GDE SAM menus are generated by IC 7100 on the ACS module.

The Convergence Alignment menus are generated by IC 7100 while the Convergence Alignment grid is generated by IC 7002.

The OSD signals from 7001 on the SSB are fed to the SSM (Small Signal Module) via connector 1002 and 1043. The OSD signals from the Convergence Processor, 7002, are buffered by 7014 through 7017 before being mixed with the signals from the ACS Microprocessor, 7100. They are fed to the SSM via connector 1000. The signals from the ACS and SSB are mixed and fed to the HOP panel and HOP IC, 7600, via connector 1610. The HOP IC, 7600, mixes the OSD signal with the video signal before feeding it to the CRTs.

Board Level Troubleshooting using the Wiring Interconnect

Figure 46

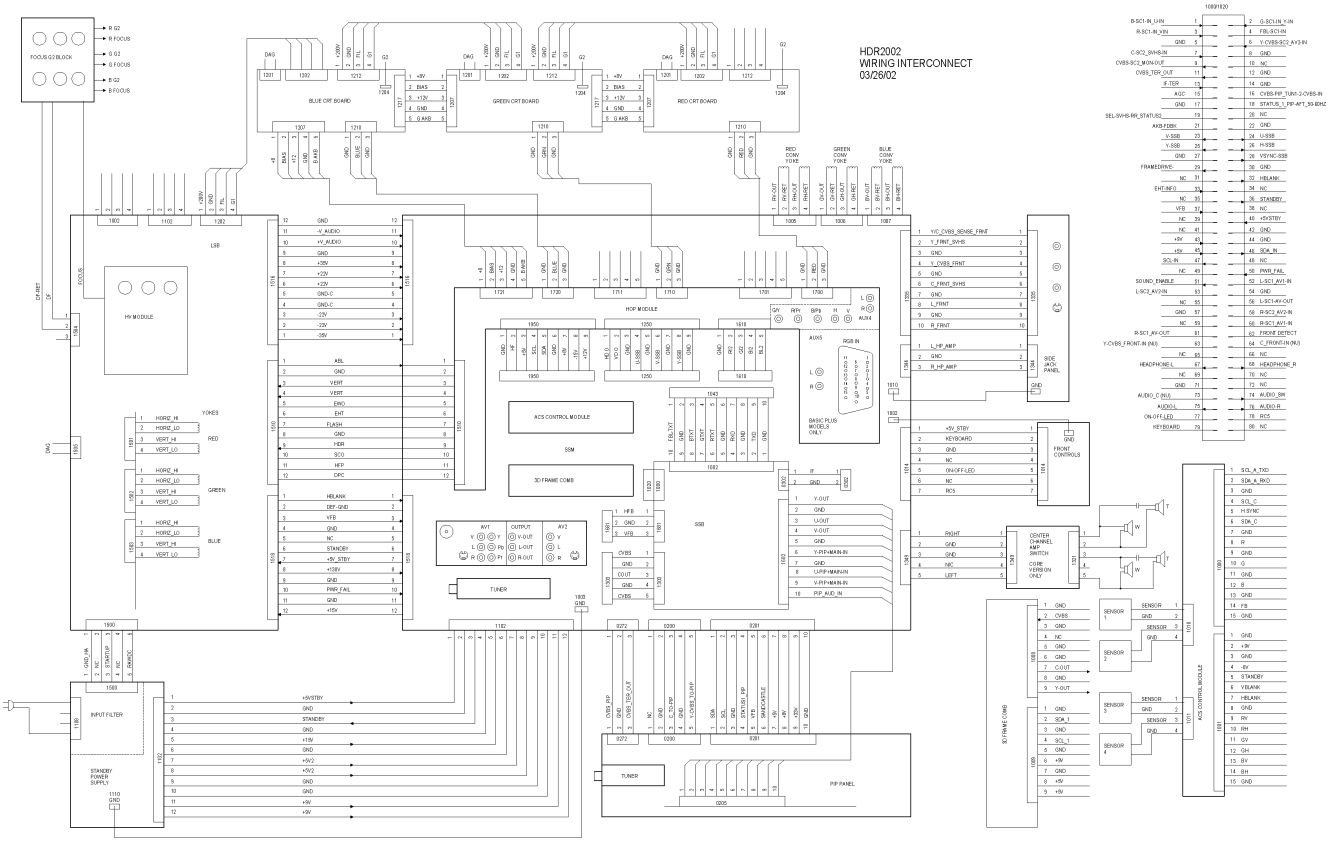

Before the set can be repaired to a component level, it is necessary to determine which board is defective. The Wiring interconnect diagram is a useful tool for this.

Dead Set

The Standby Power supply and Rectifiers are located on the Input panel. Control for power On/Off is performed by the Microprocessor located on the SSB. This Processor is powered by the 5-volt standby voltage from the Input Panel. For a Dead Set condition, check the 5-volt standby supply on Pin 1 of 1102. If this voltage is present, check the Standby line on Pin 3. This line will be approximately 2.6 volts in standby and zero volts when the set is turned On. If the Standby line goes Low, check the 130-volt source on Pin 8 of connector 1518. If this voltage is present, the Full Power supply on located on the Large Signal panel is working. If the Picture is not present but audio is, the High voltage or video drive circuits may have failed. Checking the Screen voltage from the Focus G2 block will indicate whether the High Voltage circuit is working or not. Horizontal and Vertical drive from the HOP panel must be present for the High Voltage to be present. Horizontal drive should be present on Pin 9 of 1510 and Vertical drive should be present on Pin 3.

No Picture

If Audio is present but there is no Picture, press the Index button on the Remote control. If OSD is present, High Voltage is working, and the CRT drive circuits are working. If the signal is NTSC, YUV from the SSM is fed to the HOP on connector 1250. YUV from the SSB can be checked on Pins 25, 24, and 23 of connector 1020.

No Audio

The Audio amplifier is located on the SSM. The Audio is powered by a supply located on the Large Signal panel. This voltage can be checked on Pins 10 and 11 of connector 1516. These voltages will measure between and plus and minus 19 to 23 volts, depending on which chassis is used. Speaker output can be checked on connector 1349. A Center Channel Amp switch panel will be present on the Core models.

No Convergence Drive

The Convergence correction signals are created on the ACS module. These can be checked on Pins 9~14 on connector 1001. The Convergence outputs are located on the SSM. The +35, -35, -22 and +22 volt supplies for convergence are supplied by the LSB. The fuses for these supplies are located on the SSM.

DPTV305(7621)



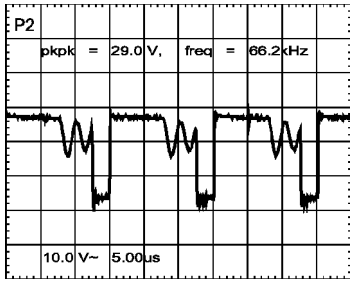

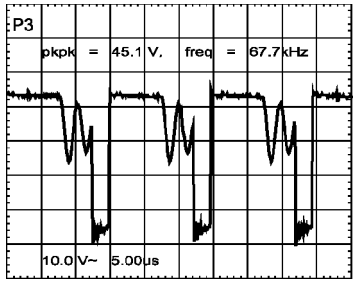

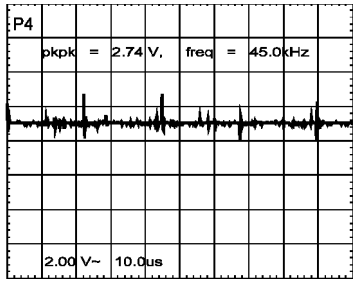

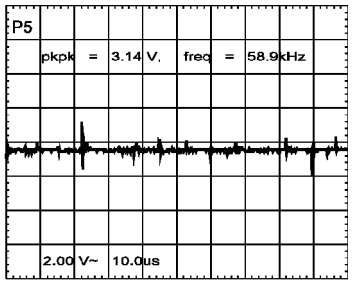

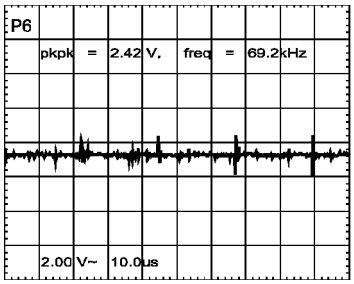

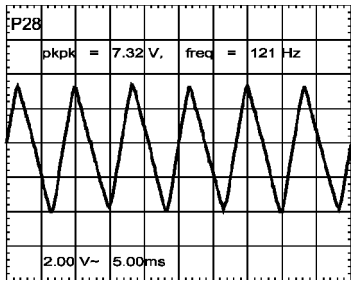

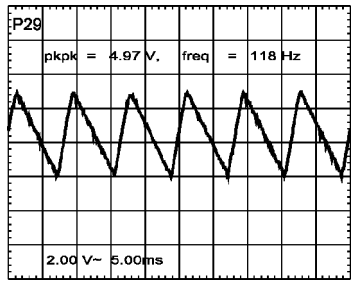

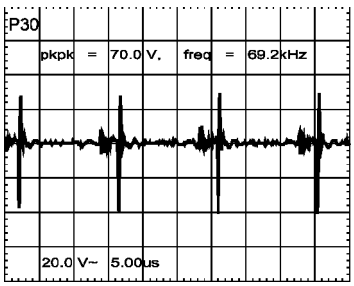

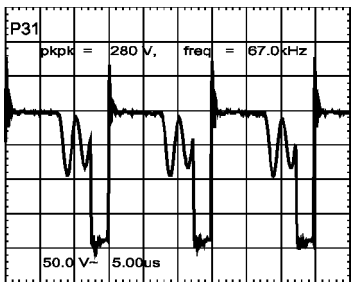

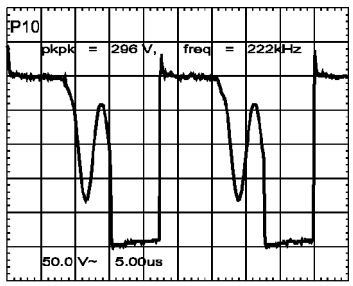

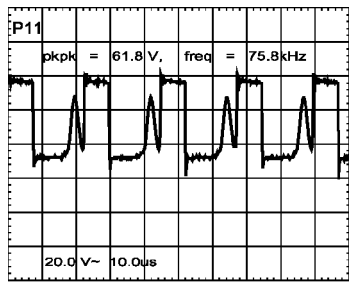



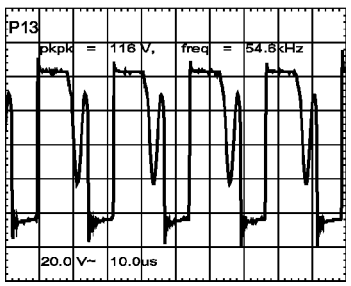

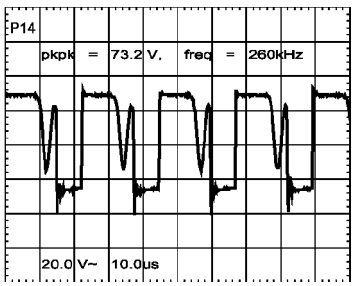

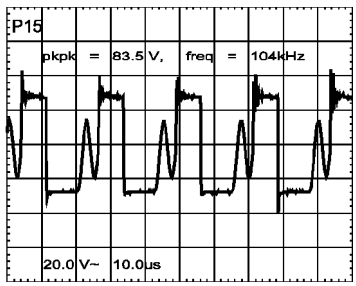



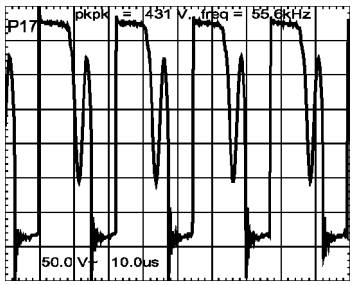

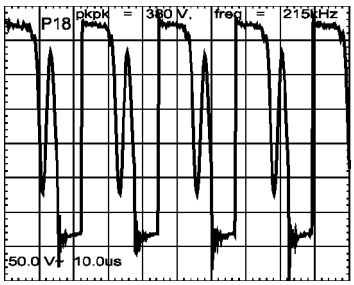

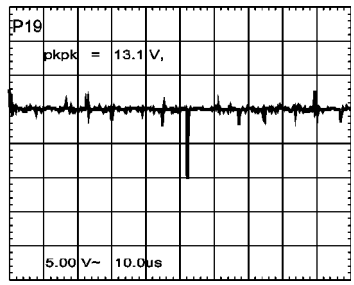

DPTV305(7621)

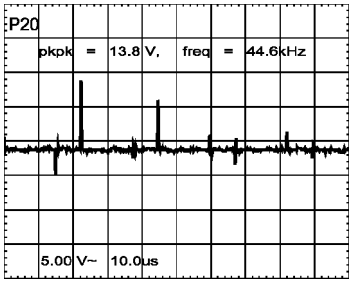

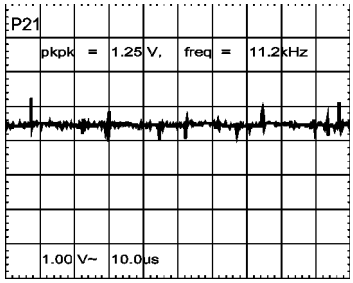





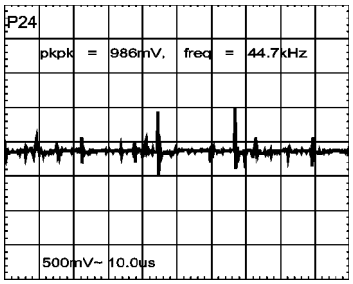

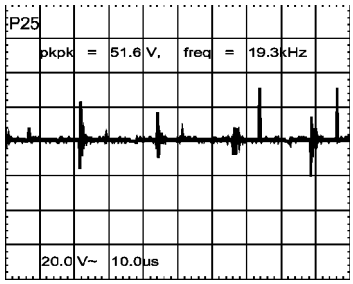





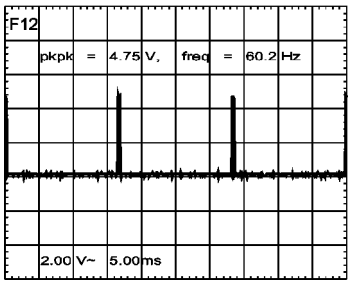

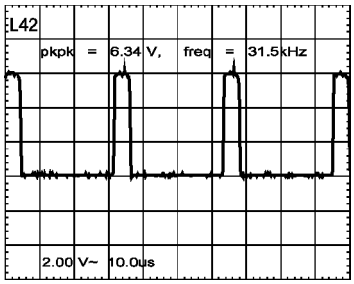





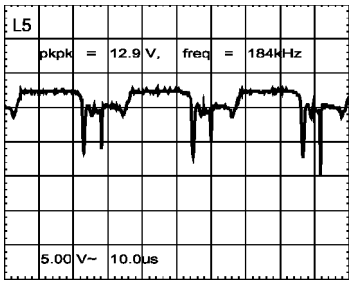

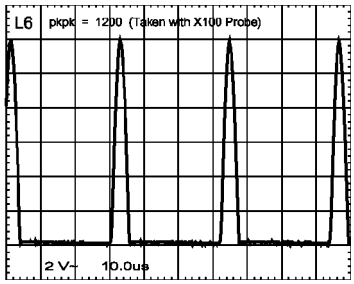





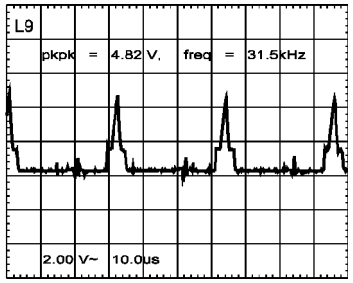







DPTV305(7621)

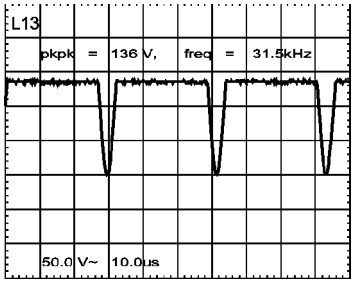



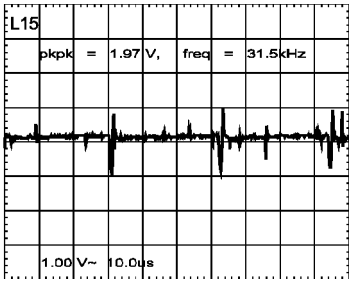

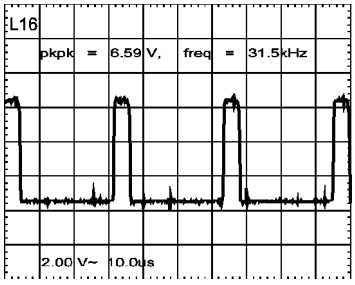

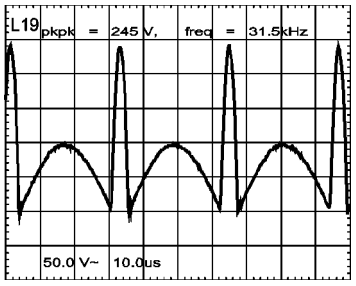

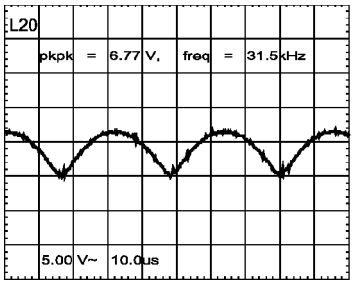

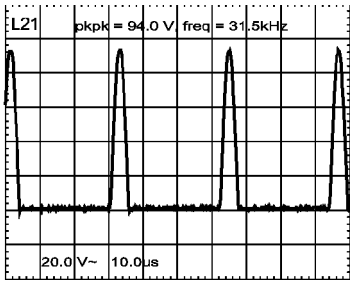

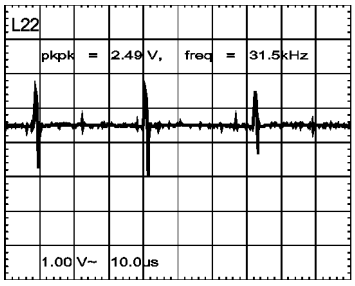

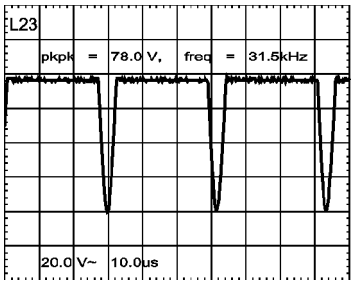



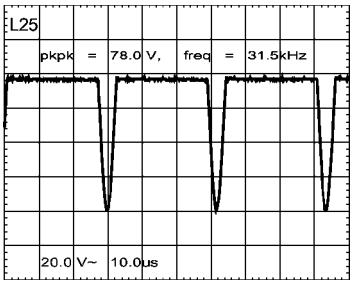

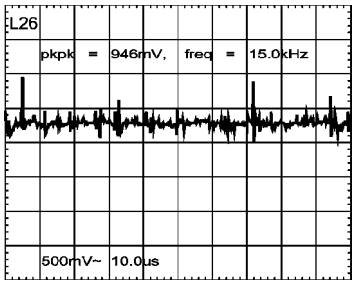

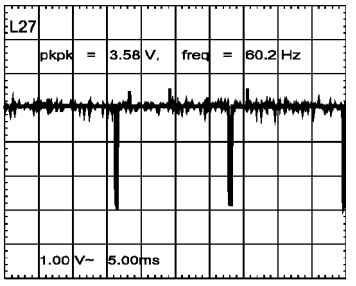

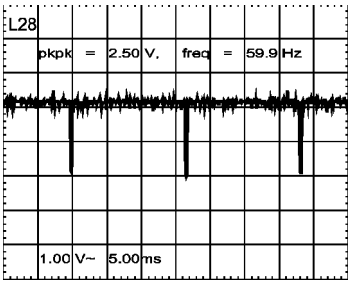



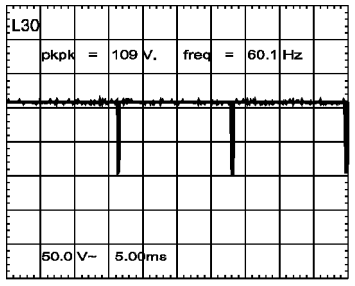

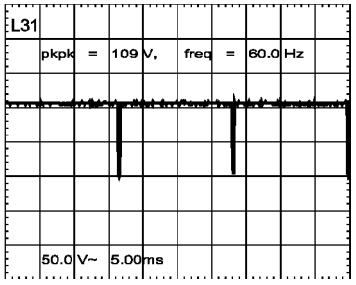



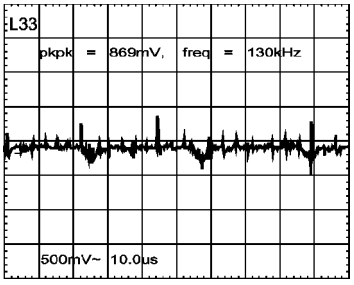

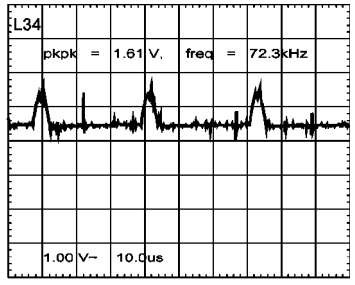

DPTV305(7621)

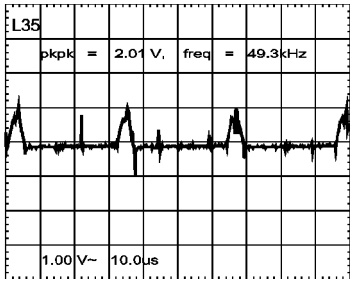

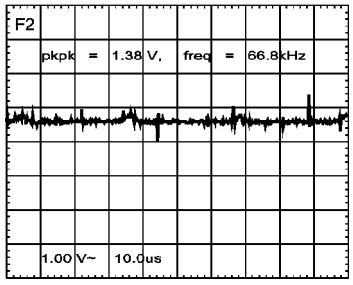

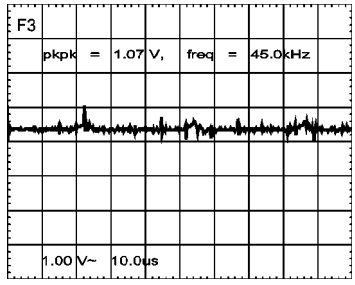

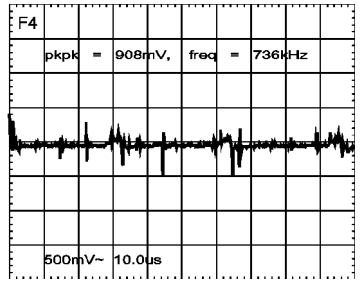

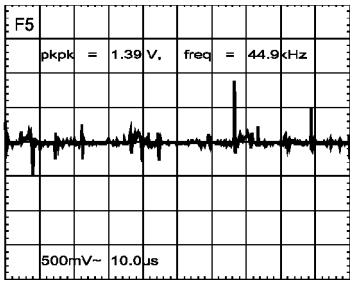

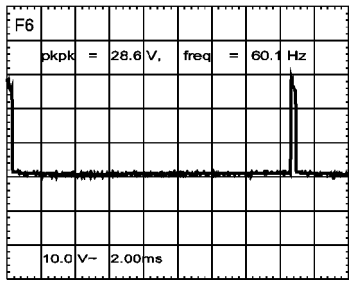

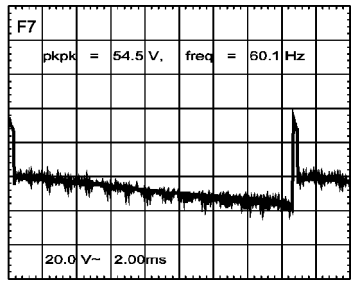

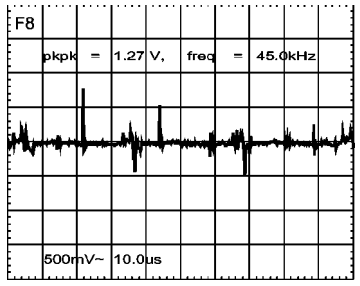

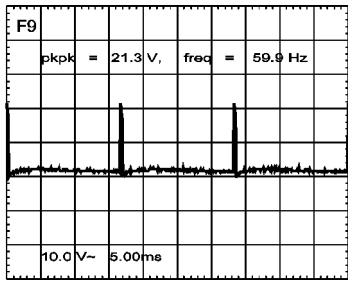

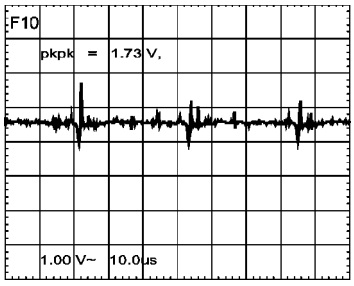

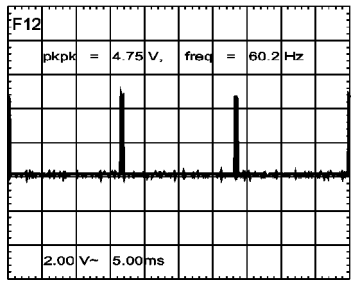

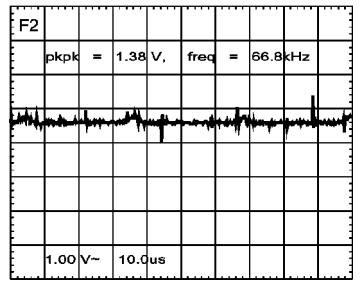

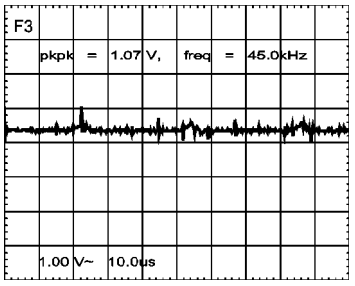

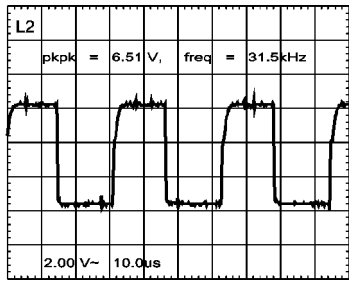

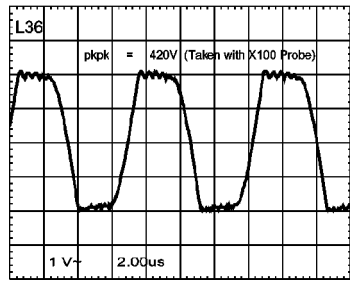

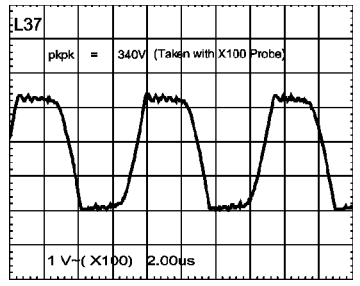

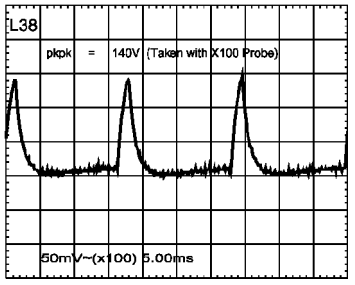

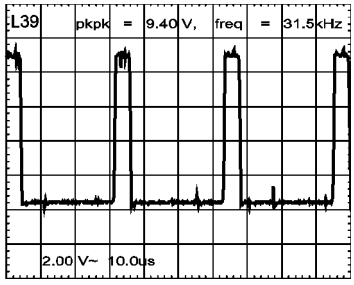

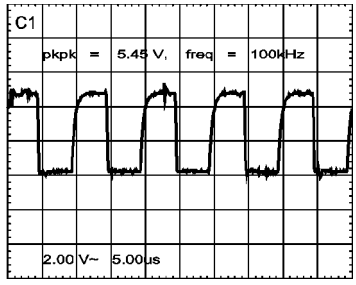

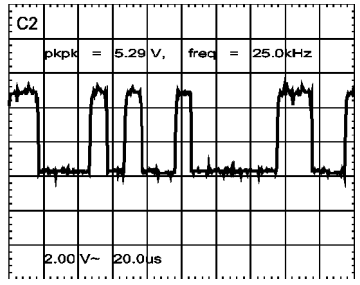

DPTV305(7621)

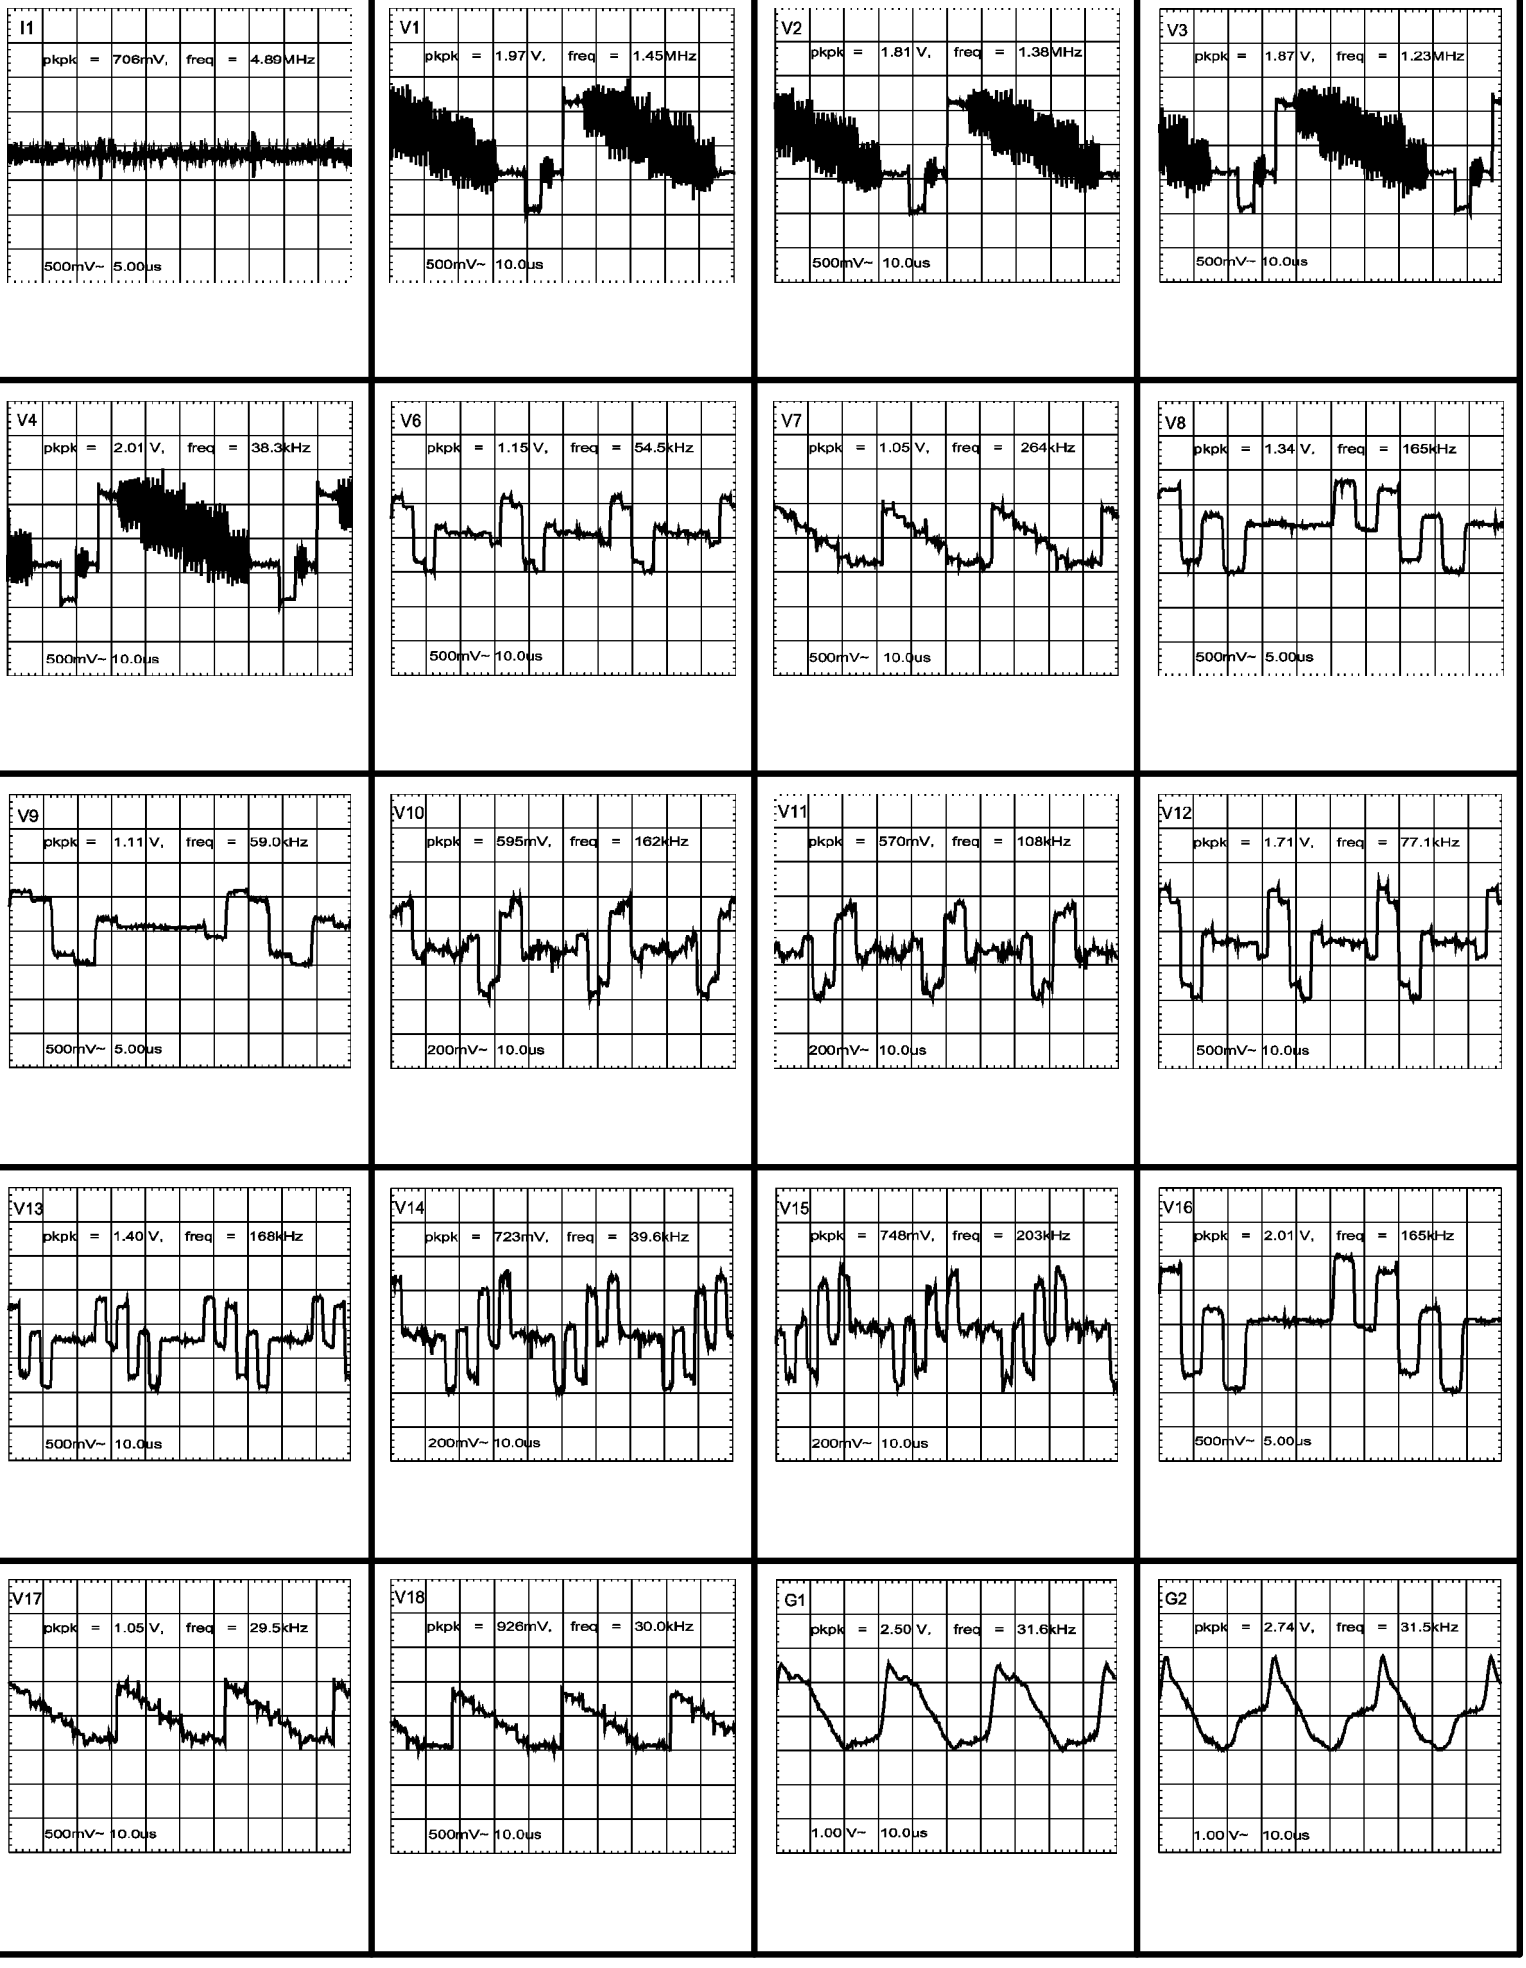

DPTV305(7621)

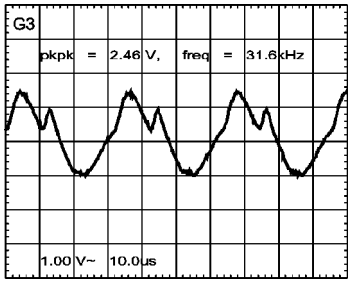

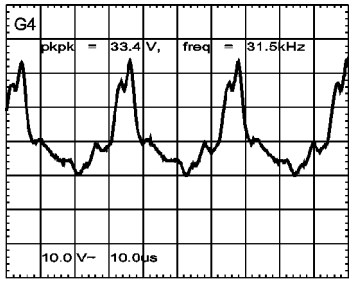





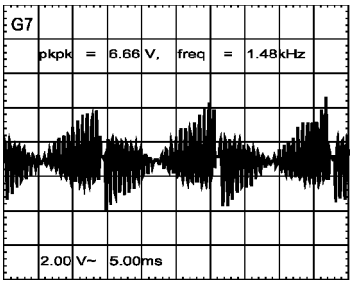

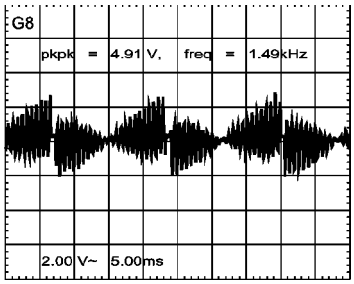





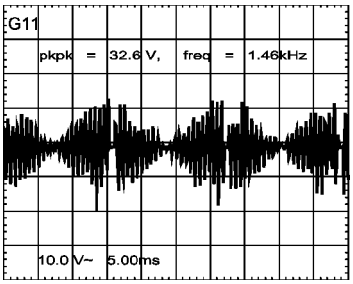

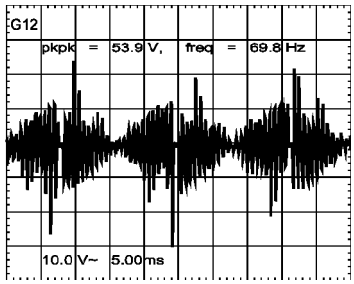

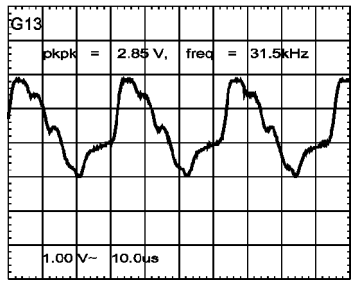



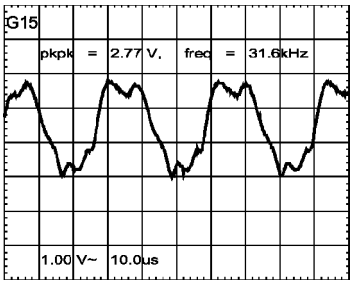



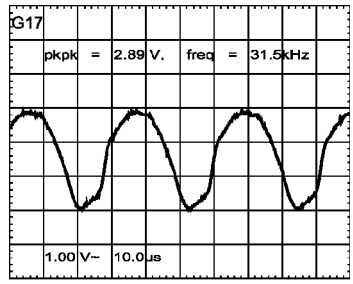

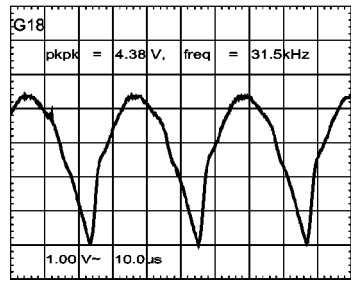

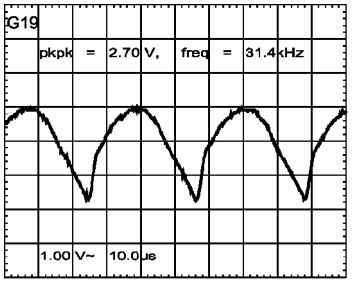





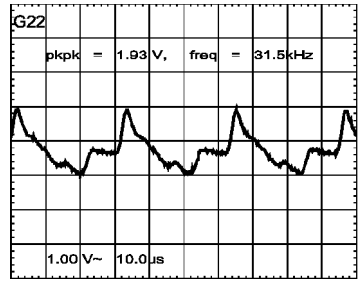

DPTV305(7621)

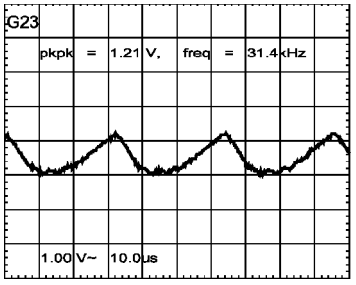

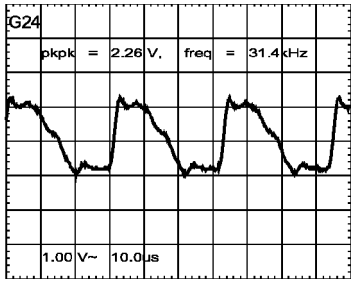

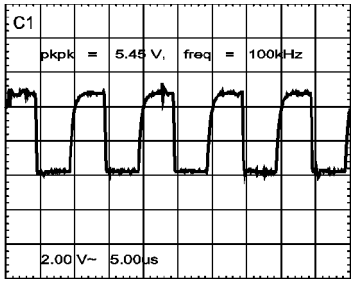

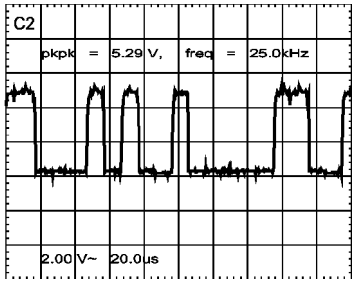

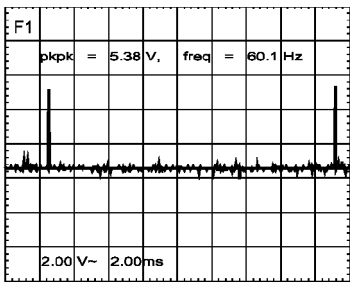

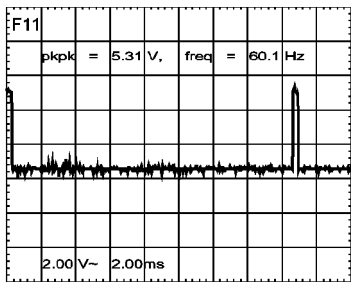

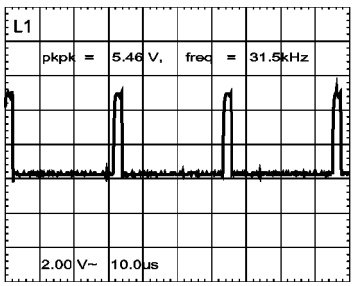

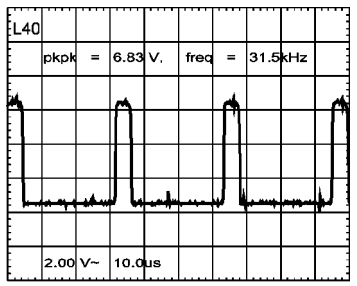

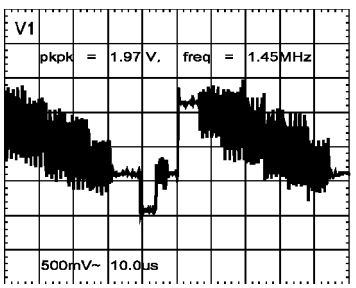

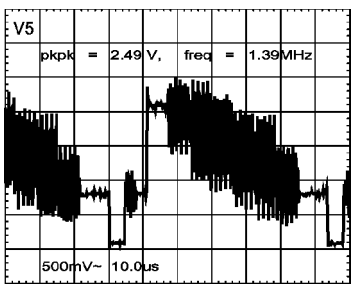

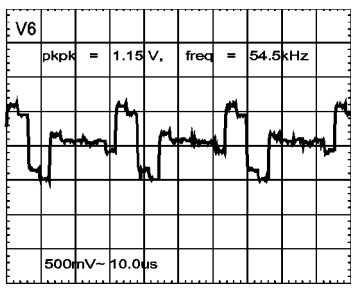

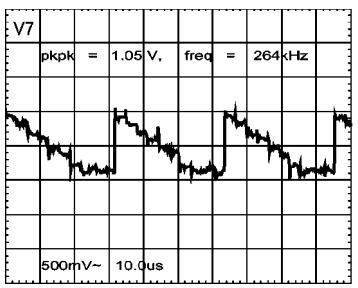

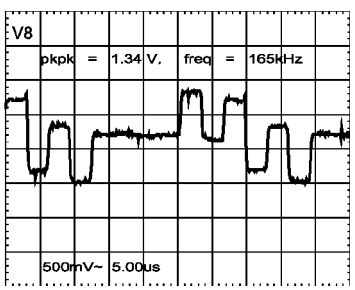

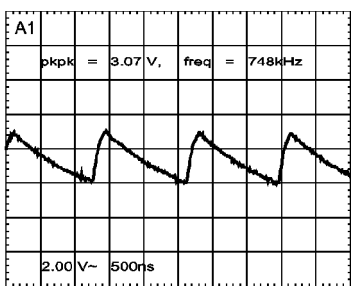

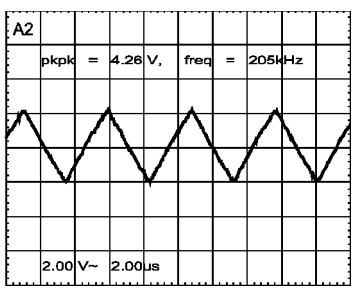

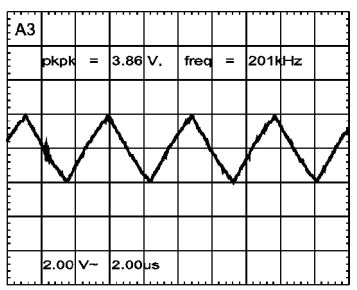

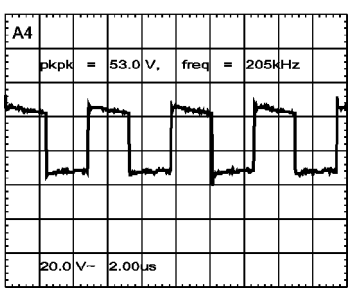

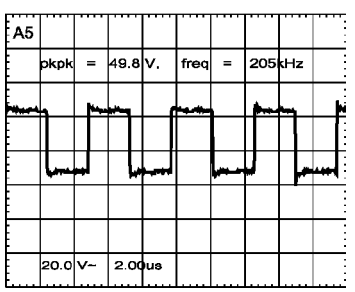

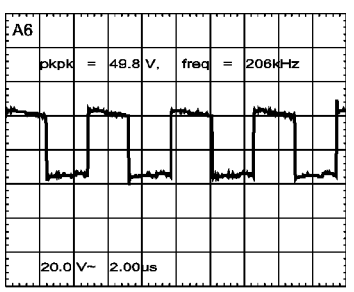

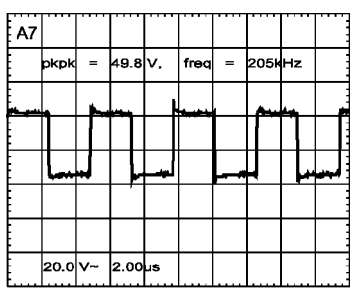

DPTV305(7621)

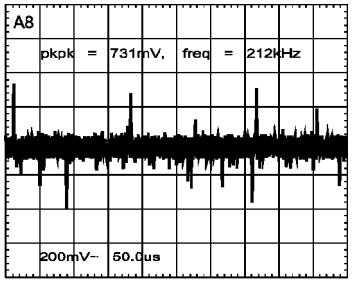

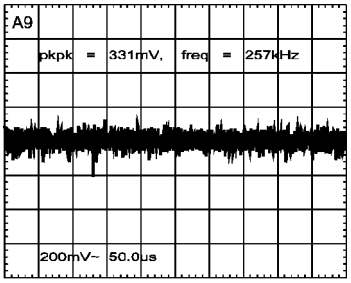

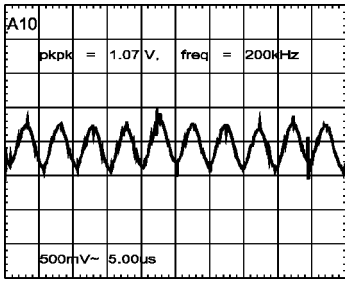

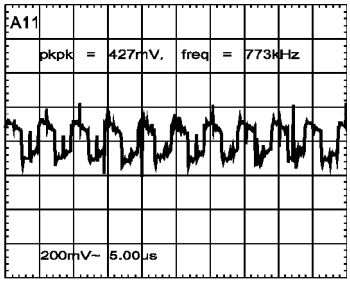

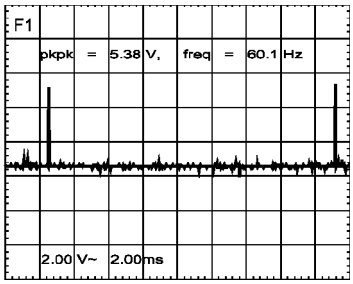

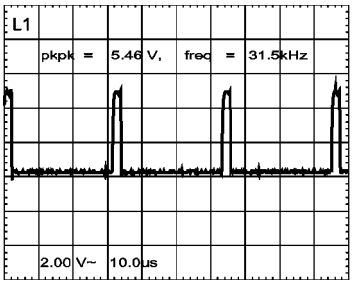

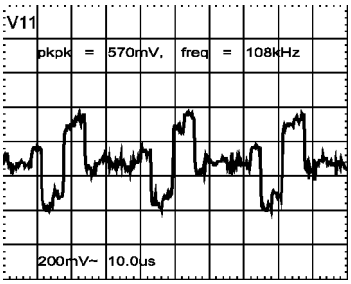

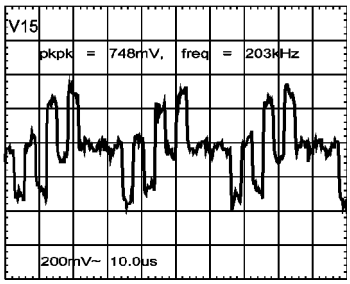

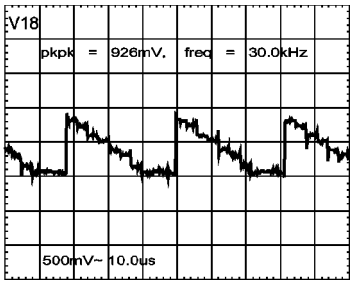

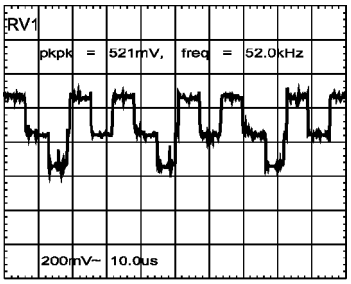

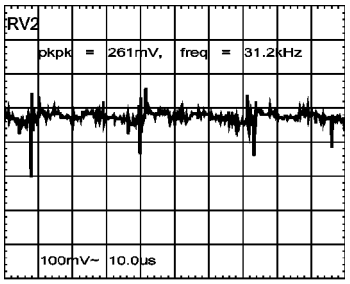



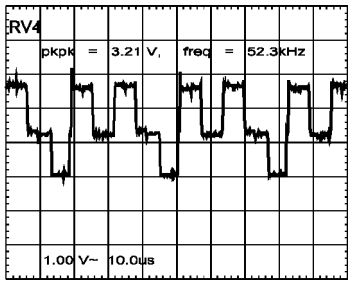

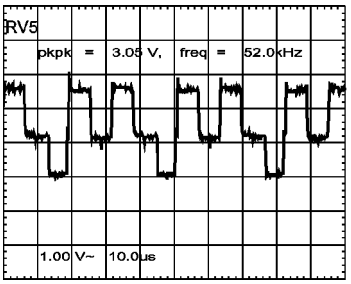

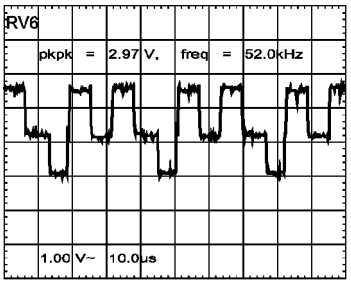

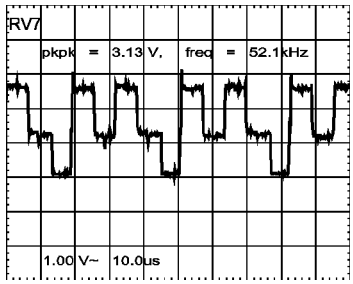

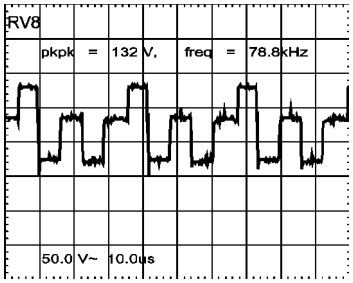

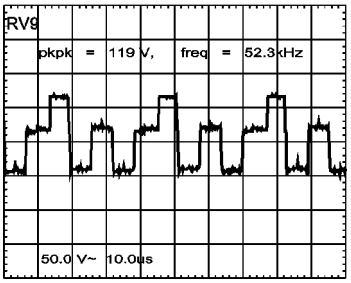

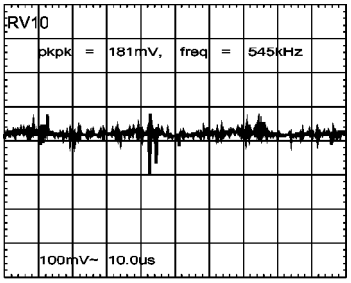



DPTV305(7621)

RV12

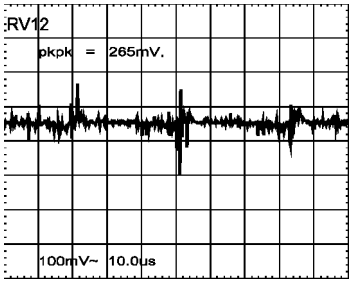

RV13

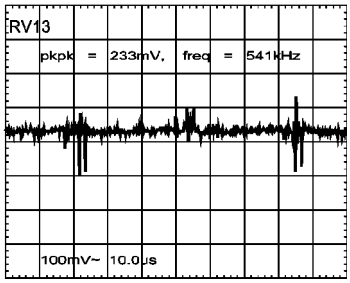

GV1

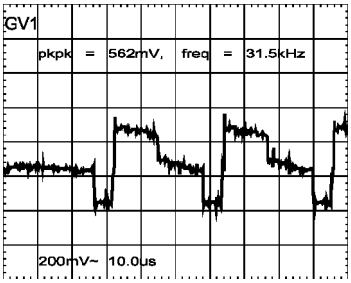

GV2

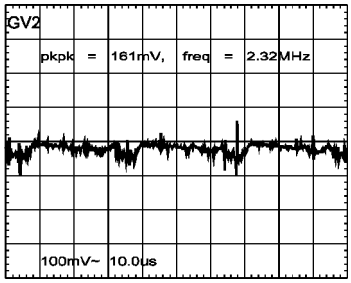

GV3

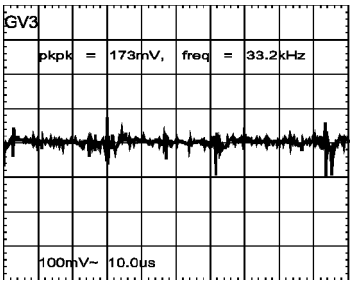

GV4

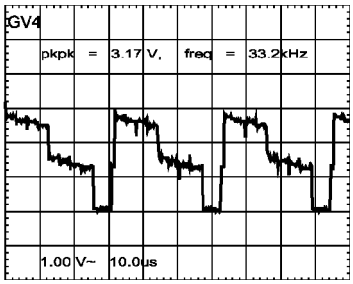

GV5

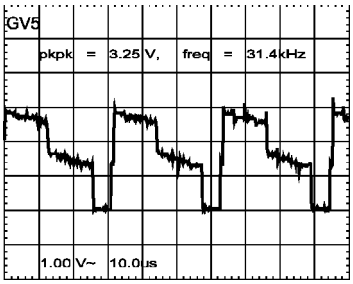

GV6

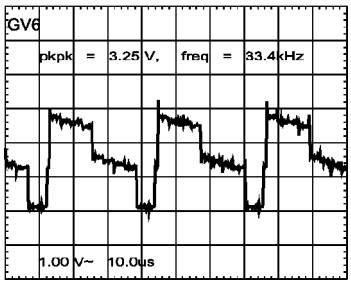

GV7

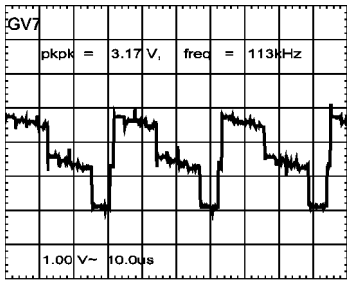

GV8

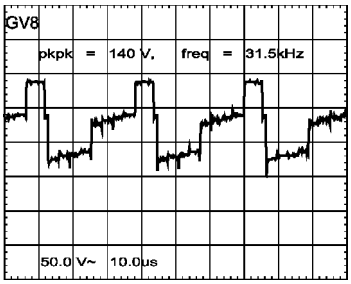

GV9



GV10



GV11

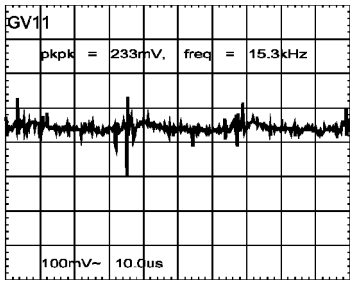

GV12

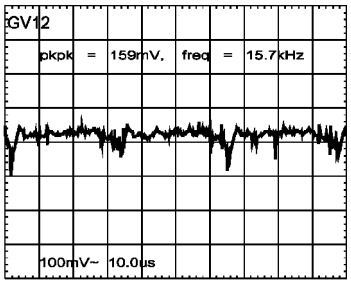

GV13

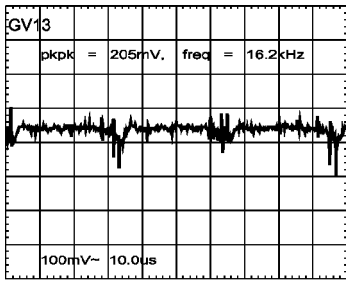

BV1

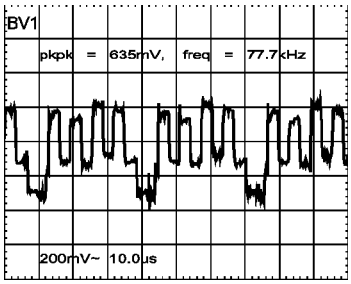

BV2

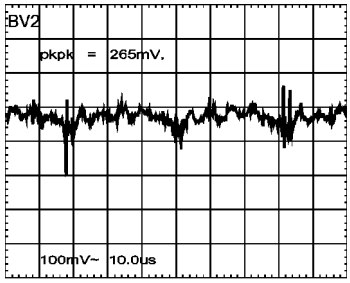

BV3

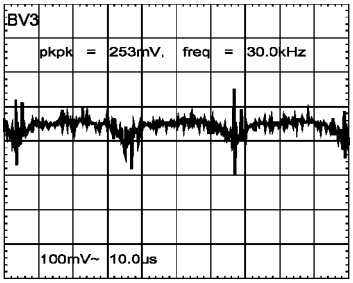

BV4

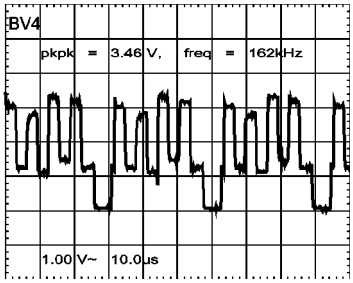

BV5

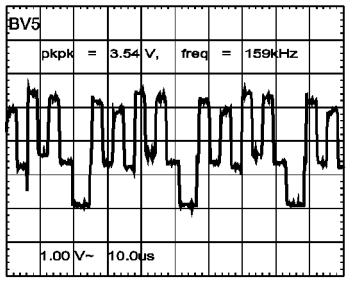

DPTV305(7621)



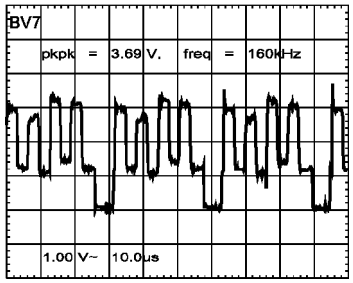



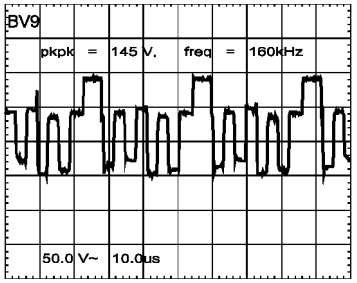



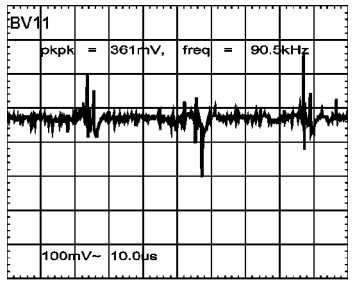



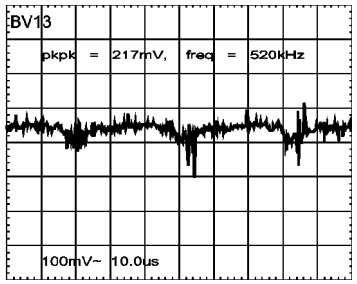

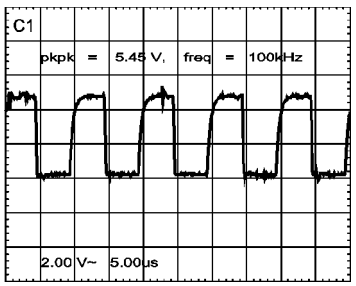

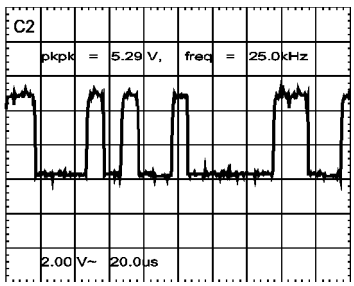

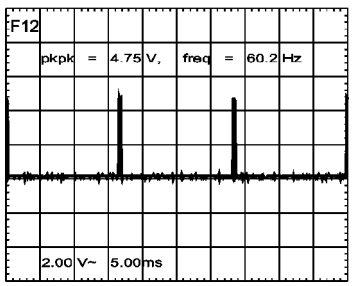

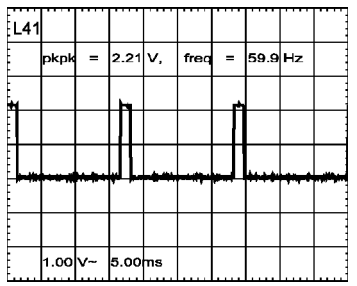

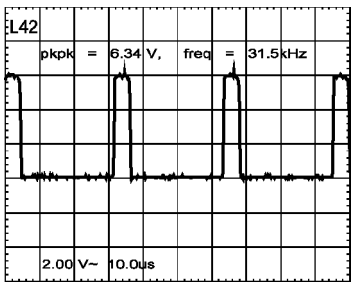

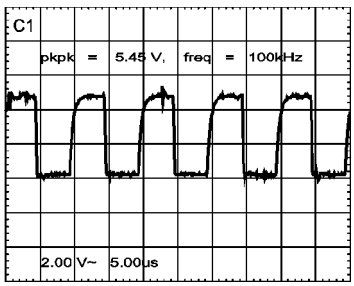

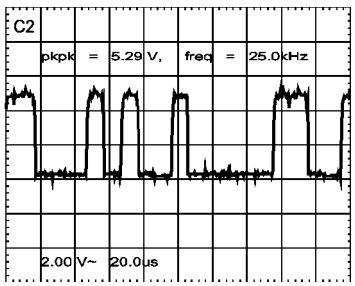

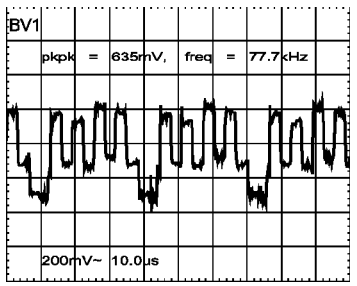

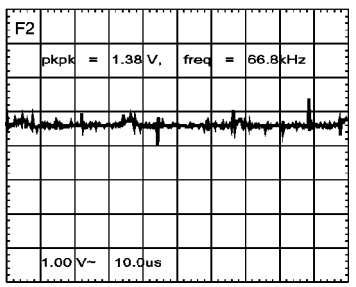

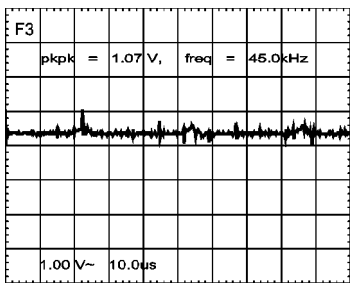

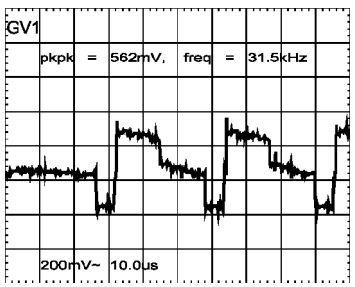

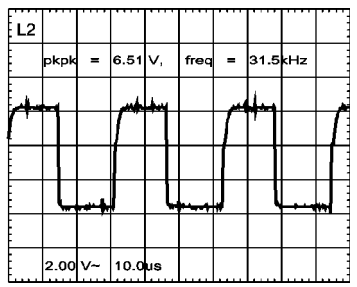

DPTV305(7621)

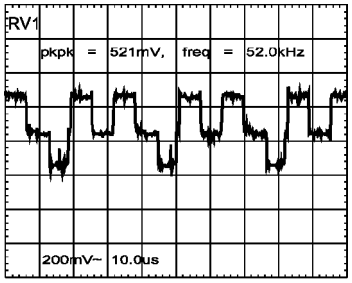

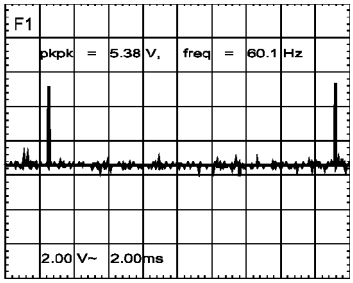

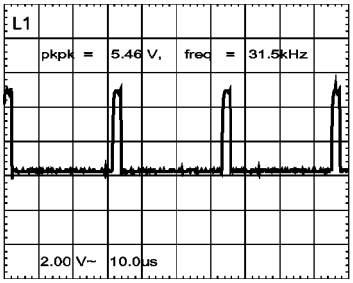

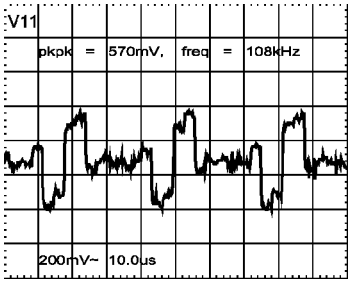

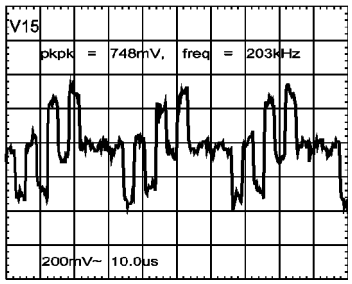

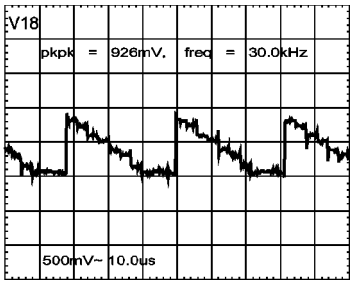

SF14



2V/div DC
10ms/div

SI6 VIF-Out



0.5V / div AC
10ms / div

SL8



1V/div DC
20us/div

SV2 CVBS_INT



0.5V / div AC
10ms / div

SV6



500mV/div DC
20us/div

SV7



500mV/div DC
20us/div

SV8



500mV/div DC
20us/div

SV9 SDA



1V / div DC
0.2ms / div

SV10 SCL



1V / div DC
0.2ms / div

SS3



1V/div DC
10us/div

SS4



1V/div DC
5ms/div

SS5 Y-IN



0.2V / div AC
10ms / div

SS6 H-A



2V / div AC
10ms / div

SS7 V-A



1V / div AC
5ms / div

DPTV305(7621)

SS8



1V/div DC
250ns/div

SV13 V-IN



0.2V / div AC
10ms / div

SV14



500mV/div DC
5us/div

SV15



500mV/div DC
5us/div

SV16



500mV/div DC
5us/div

SV17 SCL



1V / div DC
0.2ms / div

SF17



1V/div DC
5ms/div

SF18



1V/div DC
10ms/div

SF19



1V/div DC
10ms/div

SF20



1V/div DC
5ms/div

SL12



1V/div DC
50us/div

SL13



1V/div DC
10us/div

SV22 SCL

1V / div DC
0.2ms / div

SV23 SDA



1V / div DC
0.2ms / div

SV28



1V/div DC
10us/div

SV29



1V/div DC
10us/div

SV30



1V/div DC
10us/div

F22



200mV / div DC
20µs / div

F23



200mV / div DC
20µs / div

F24



200mV / div DC
20µs / div

F25



500mV / div DC
20µs / div

F26



500mV / div DC
20µs / div

F27



500mV / div DC
20µs / div

V17



0,5V / div DC
10µs / div

V18



0,5V / div DC
10µs / div

F21



1V / div DC
20µs / div

F1



1V / div DC
20µs / div

F2



200mV / div DC
20µs / div

F14



2V/div DC
10ms/div

F15



1V / div DC
20µs / div

F16



1V / div DC
5µs / div

F17



1V/div DC
5ms/div

F18



1V/div DC
10ms/div

V19



1V/div DC
10µs/div

V20



1V/divDC
10µs/div

F13



1V / div DC
20µs / div

F3



200mV / div AC
100ns / div

F4



50mV / div AC
200ns / div

F5



50mV / div AC
200ns / div

F6



1V / div DC
20µs / div

F7



500mV / div DC
2ms / div

F8



1V / div DC
20µs / div

F9



1V / div DC
20µs / div

F10



1V / div DC
20µs / div

F11



1V / div DC
20 s / div

F12



2V / div DC
5ms / div

HDR2002 INTERCONNECT WIRING DIAGRAM

FG2
FOCUS G2 BLOCK
R G2
R FOCUS
G G2
G FOCUS
B G2
B FOCUS

BLUE CRT PANEL
GREEN CRT PANEL
RED CRT PANEL
DAG
+200V
GND
FIL
G1
G2
+8V
BIAS
+12V
GND
G AKB
RED CONV YOKE
GREEN CONV YOKE
BLUE CONV YOKE
RV-OUT
RV-RET
RH-OUT
RH-RET
GV-OUT
GV-RET
GH-OUT
GH-RET
BV-OUT
BV-RET
BH-OUT
BH-RET

DVI PANEL
(CORE MODELS ONLY)
DVI CONNECTOR

LSB PANEL
SSM PANEL
HOP PANEL
HV MODULE
FOCUS
DF-RET
DF
-V_AUDIO
+V_AUDIO
+35V
+22V
GND-C
-22V
-35V
ABL
VERT
EWO
EHT
FLASH
HDR
SCO
HFP
DPC
HBLANK
DEF-GND
VFB
STANDBY
+130V
PWR_FAIL
+15V
YOKES
HORIZ_HI
HORIZ_LO
VERT_HI
VERT_LO
RED
GREEN
BLUE
DAG

ACS PANEL ▲
3D COMB FILTER ★
SSB PANEL
Y-OUT
U-OUT
V-OUT
Y-PIP+MAIN-IN
U-PIP+MAIN-IN
V-PIP+MAIN-IN
PIP_AUD_IN
CVBS
COUT
AV1
AV2
OUTPUT
V-OUT
L-OUT
R-OUT
TUNER

Y/C_CVBS_SENSE_FRNT
Y_FRNT_SVHS
Y_CVBS_FRNT
C_FRNT_SVHS
L_FRNT
R_FRNT
SIDE JACK PANEL
L_HP_AMP
R_HP_AMP
AUX4
AUX5
RGB IN
BASIC PLUS MODELS ONLY
+5V_STBY
KEYBOARD
ON-OFF-LED
IR REC/ KEYBOARD PANEL
RIGHT
LEFT
N/C
REAR SWITCH PANEL
(CORE MODELS ONLY)

1000/1020
SSM PANEL TO SSB MODULE CONNECTRO

B-SC1-IN_U-IN	1	2	G-SC1-IN_Y-IN
R-SC1-IN_VIN	3	4	FBL-SC1-IN
GND	5	6	Y-CVBS-SC2_AV2-IN
C-SC2_SVHS-IN	7	8	GND
CVBS-SC2_MON-OUT	9	10	NC
CVBS_TER_OUT	11	12	GND
IF-TER	13	14	GND
AGC	15	16	CVBS-PIP_TUN1-2-CVBS-IN
GND	17	18	STATUS_1_PIP-AFT_50-60HZ
SEL-SVHS-RR_STATUS2	19	20	NC
AKB-FDBK	21	22	GND
V-SSB	23	24	U-SSB
Y-SSB	25	26	H-SSB
GND	27	28	VSYNC-SSB
FRAMEDRIVE-	29	30	GND
NC	31	32	HBLANK
EHT-INFO	33	34	NC
NC	35	36	STANDBY
VFB	37	38	NC
NC	39	40	+5VSTBY
NC	41	42	GND
+9V	43	44	GND
+5V	45	46	SDA_IN
SCL-IN	47	48	NC
NC	49	50	PWR_FAIL
SOUND_ENABLE	51	52	L-SC1_AV1-IN
L-SC2_AV2-IN	53	54	GND
NC	55	56	L-SC1-AV-OUT
GND	57	58	R-SC2_AV2-IN
NC	59	60	R-SC1_AV1-IN
R-SC1_AV-OUT	61	62	FRONT DETECT
Y-CVBS_FRONT-IN	63	64	C_FRONT-IN
NC	65	66	NC
HEADPHONE-L	67	68	HEADPHONE_R
NC	69	70	NC
GND	71	72	NC
AUDIO_C	73	74	AUDIO_SW
AUDIO-L	75	76	AUDIO-R
ON-OFF-LED	77	78	RC5
KEYBOARD	79	80	NC

ACS PANEL ▲
SCL_A_TXD
SDA_A_RXD
SCL_C
H SYNC
SDA_C
R
G
B
FB
VBLANK
RV
RH
GV
GH
BV
BH

3D COMB FILTER PANEL ★
C-OUT
Y-OUT
SDA_1
SCL_1
SENSOR 1
SENSOR 2
SENSOR 3
SENSOR 4
(CORE MODELS ONLY)

POWER SUPPLY PANEL
INPUT FILTER
GND_HA
NC
STARTUP
NC
RAWDC
+5VSTBY
STANDBY
+15V
+5V2
+9V
1110 GND

SINGLE PIP PANEL
DW PIP PANEL
(DUAL WINDOW)
CVBS_PIP
CVBS_TER_OUT
C_TO-PIP
Y-CVBS_TO-PIP
STATUS1_PIP
VFB
SANDCASTLE
+5V
+8V
+33V
0205

All Models (7621) - Power Supply Panel Schematic

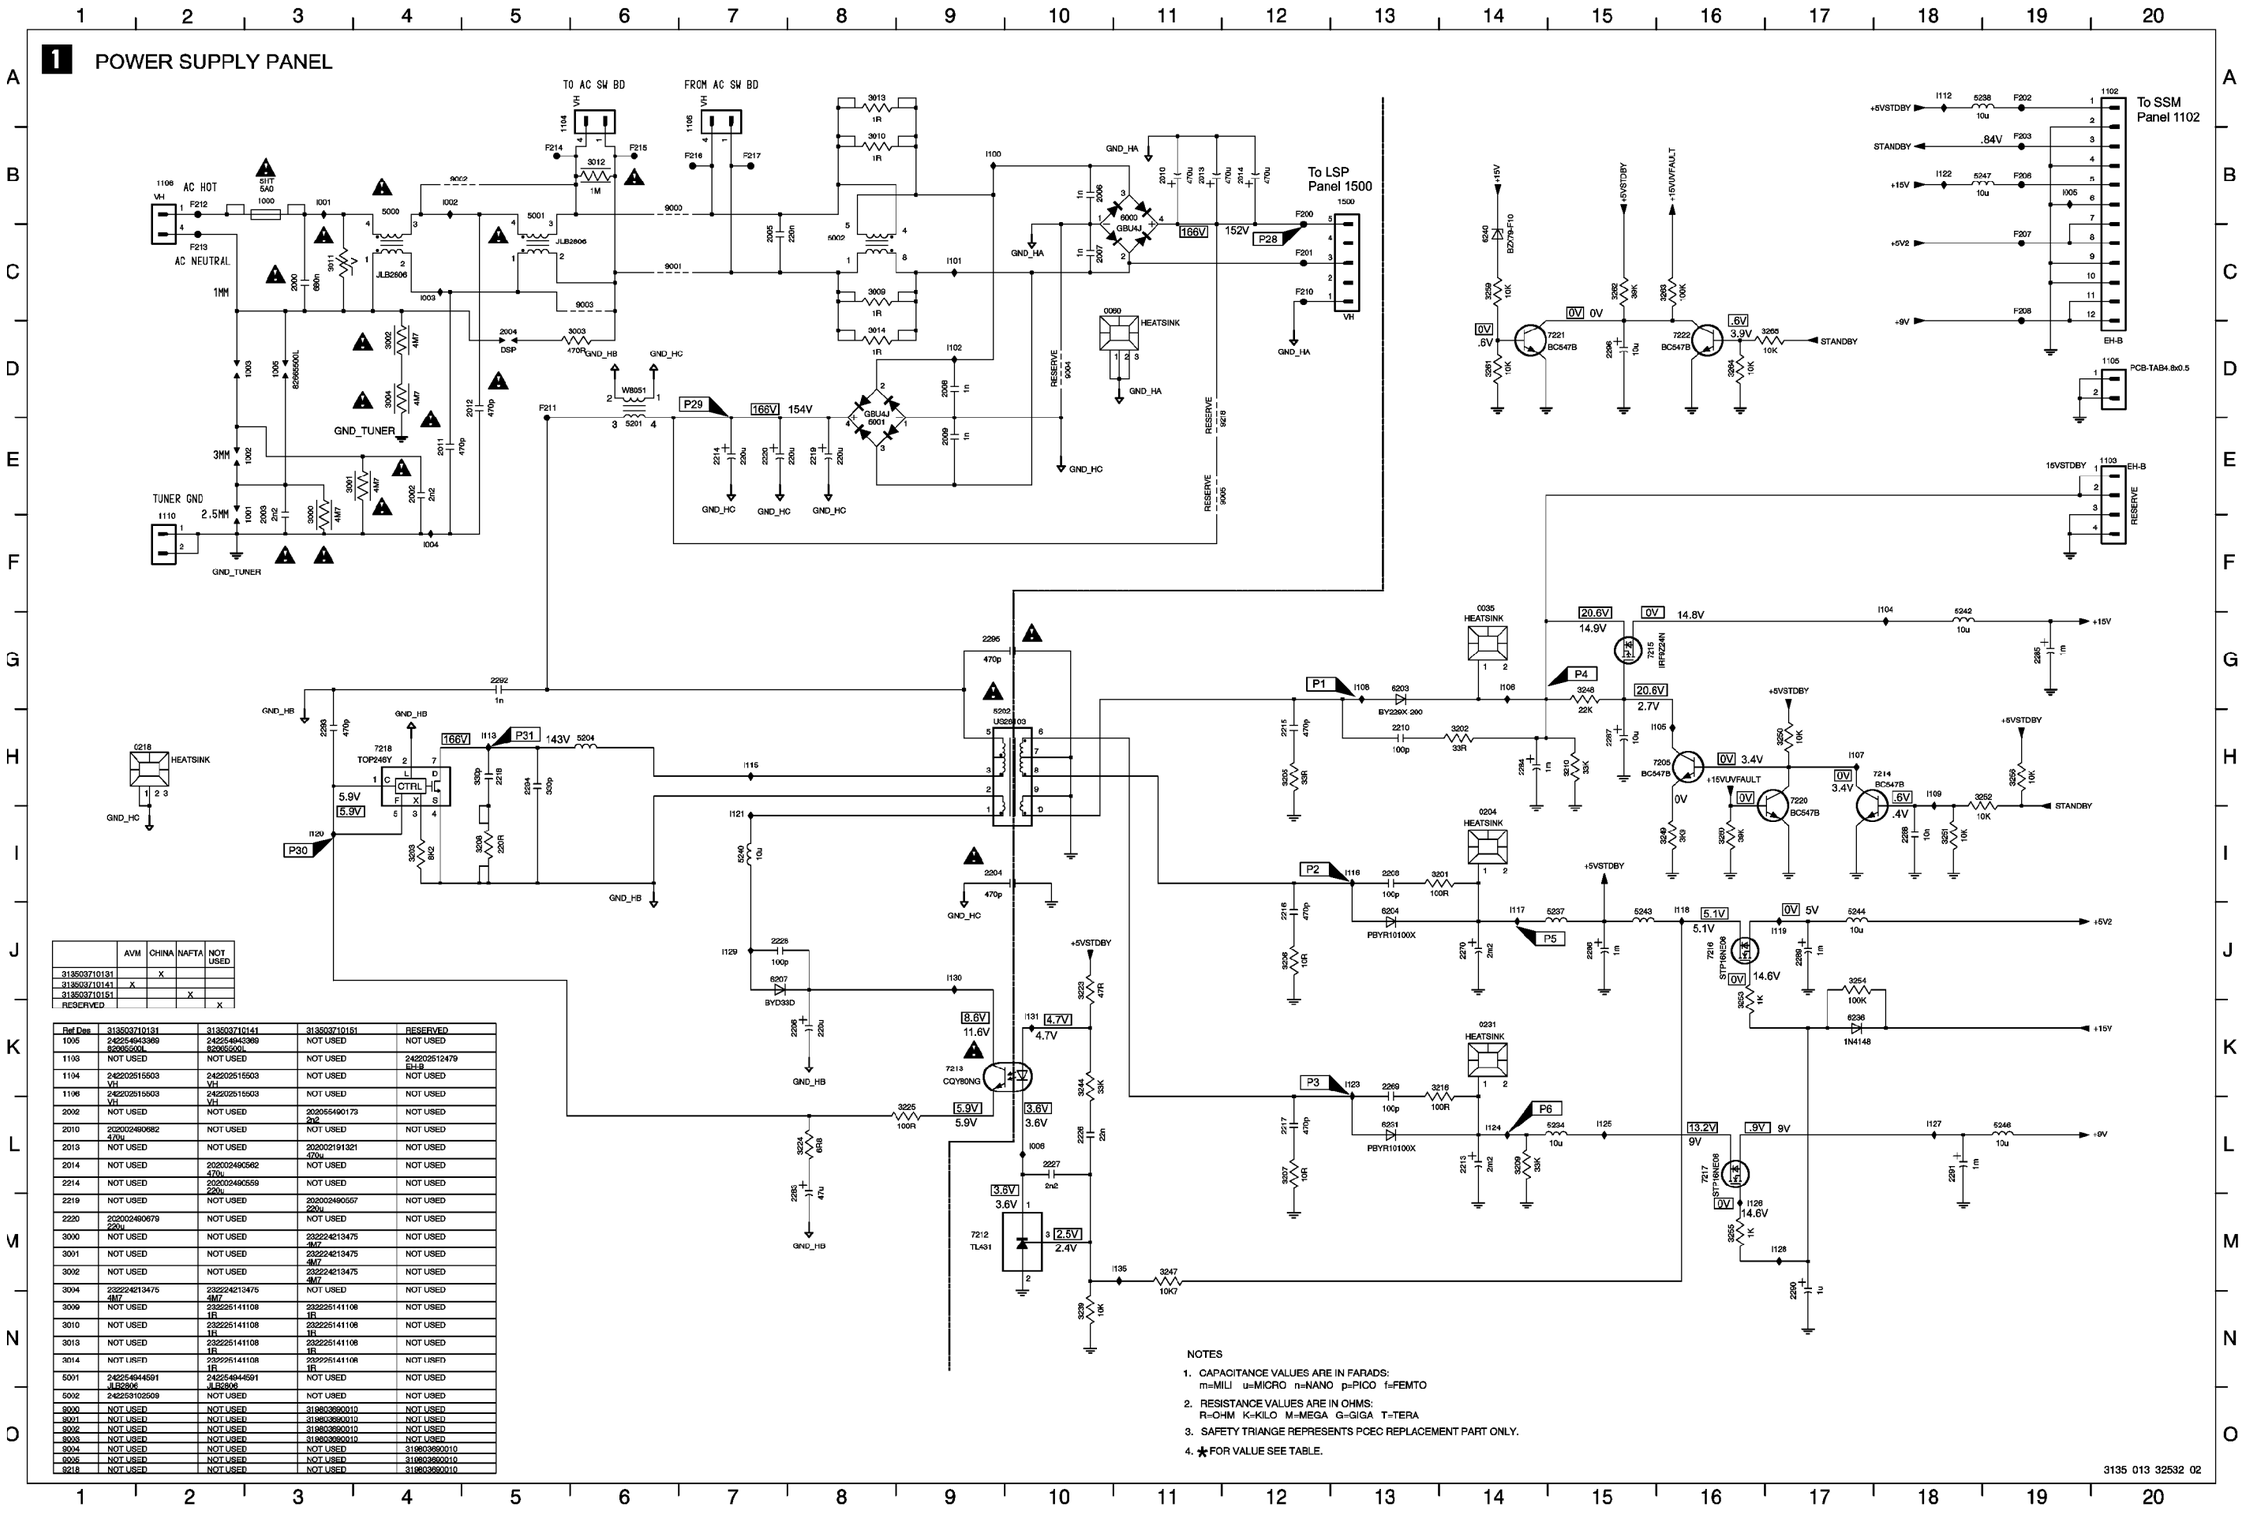

	AVM	CHINA	NAFTA	NOT USED
313503710131		X		
313503710141	X			
313503710151			X	
RESERVED				X

Ref Des	313503710131	313503710141	313503710151	RESERVED
1005	242254943369 8200550OL	242254943369 8200550OL	NOT USED	NOT USED
1103	NOT USED	NOT USED	NOT USED	242202512479 EH-B
1104	242202515503 VH	242202515503 VH	NOT USED	NOT USED
1106	242202515503 VH	242202515503 VH	NOT USED	NOT USED
2002	NOT USED	NOT USED	202005490173 2n2	NOT USED
2010	202002490682 470u	NOT USED	NOT USED	NOT USED
2013	NOT USED	NOT USED	202002191321 470u	NOT USED
2014	NOT USED	202002490562 470u	NOT USED	NOT USED
2214	NOT USED	202002490559 220u	NOT USED	NOT USED
2219	NOT USED	NOT USED	202002490557 220u	NOT USED
2220	202002490679 220u	NOT USED	NOT USED	NOT USED
3000	NOT USED	NOT USED	232224213475 4M7	NOT USED
3001	NOT USED	NOT USED	232224213475 4M7	NOT USED
3002	NOT USED	NOT USED	232224213475 4M7	NOT USED
3004	232224213475 4M7	232224213475 4M7	NOT USED	NOT USED
3009	NOT USED	232225141108 1R	232225141108 1R	NOT USED
3010	NOT USED	232225141108 1R	232225141108 1R	NOT USED
3013	NOT USED	232225141108 1R	232225141108 1R	NOT USED
3014	NOT USED	232225141108 1R	232225141108 1R	NOT USED
5001	242254944591 JLB2806	242254944591 JLB2806	NOT USED	NOT USED
5002	242253102509	NOT USED	NOT USED	NOT USED
9000	NOT USED	NOT USED	319803690010	NOT USED
9001	NOT USED	NOT USED	319803690010	NOT USED
9002	NOT USED	NOT USED	319803690010	NOT USED
9003	NOT USED	NOT USED	319803690010	NOT USED
9004	NOT USED	NOT USED	NOT USED	319803690010
9005	NOT USED	NOT USED	NOT USED	319803690010
9218	NOT USED	NOT USED	NOT USED	319803690010

All Models (7621) - LSB Panel Schematic, (1 of 3)

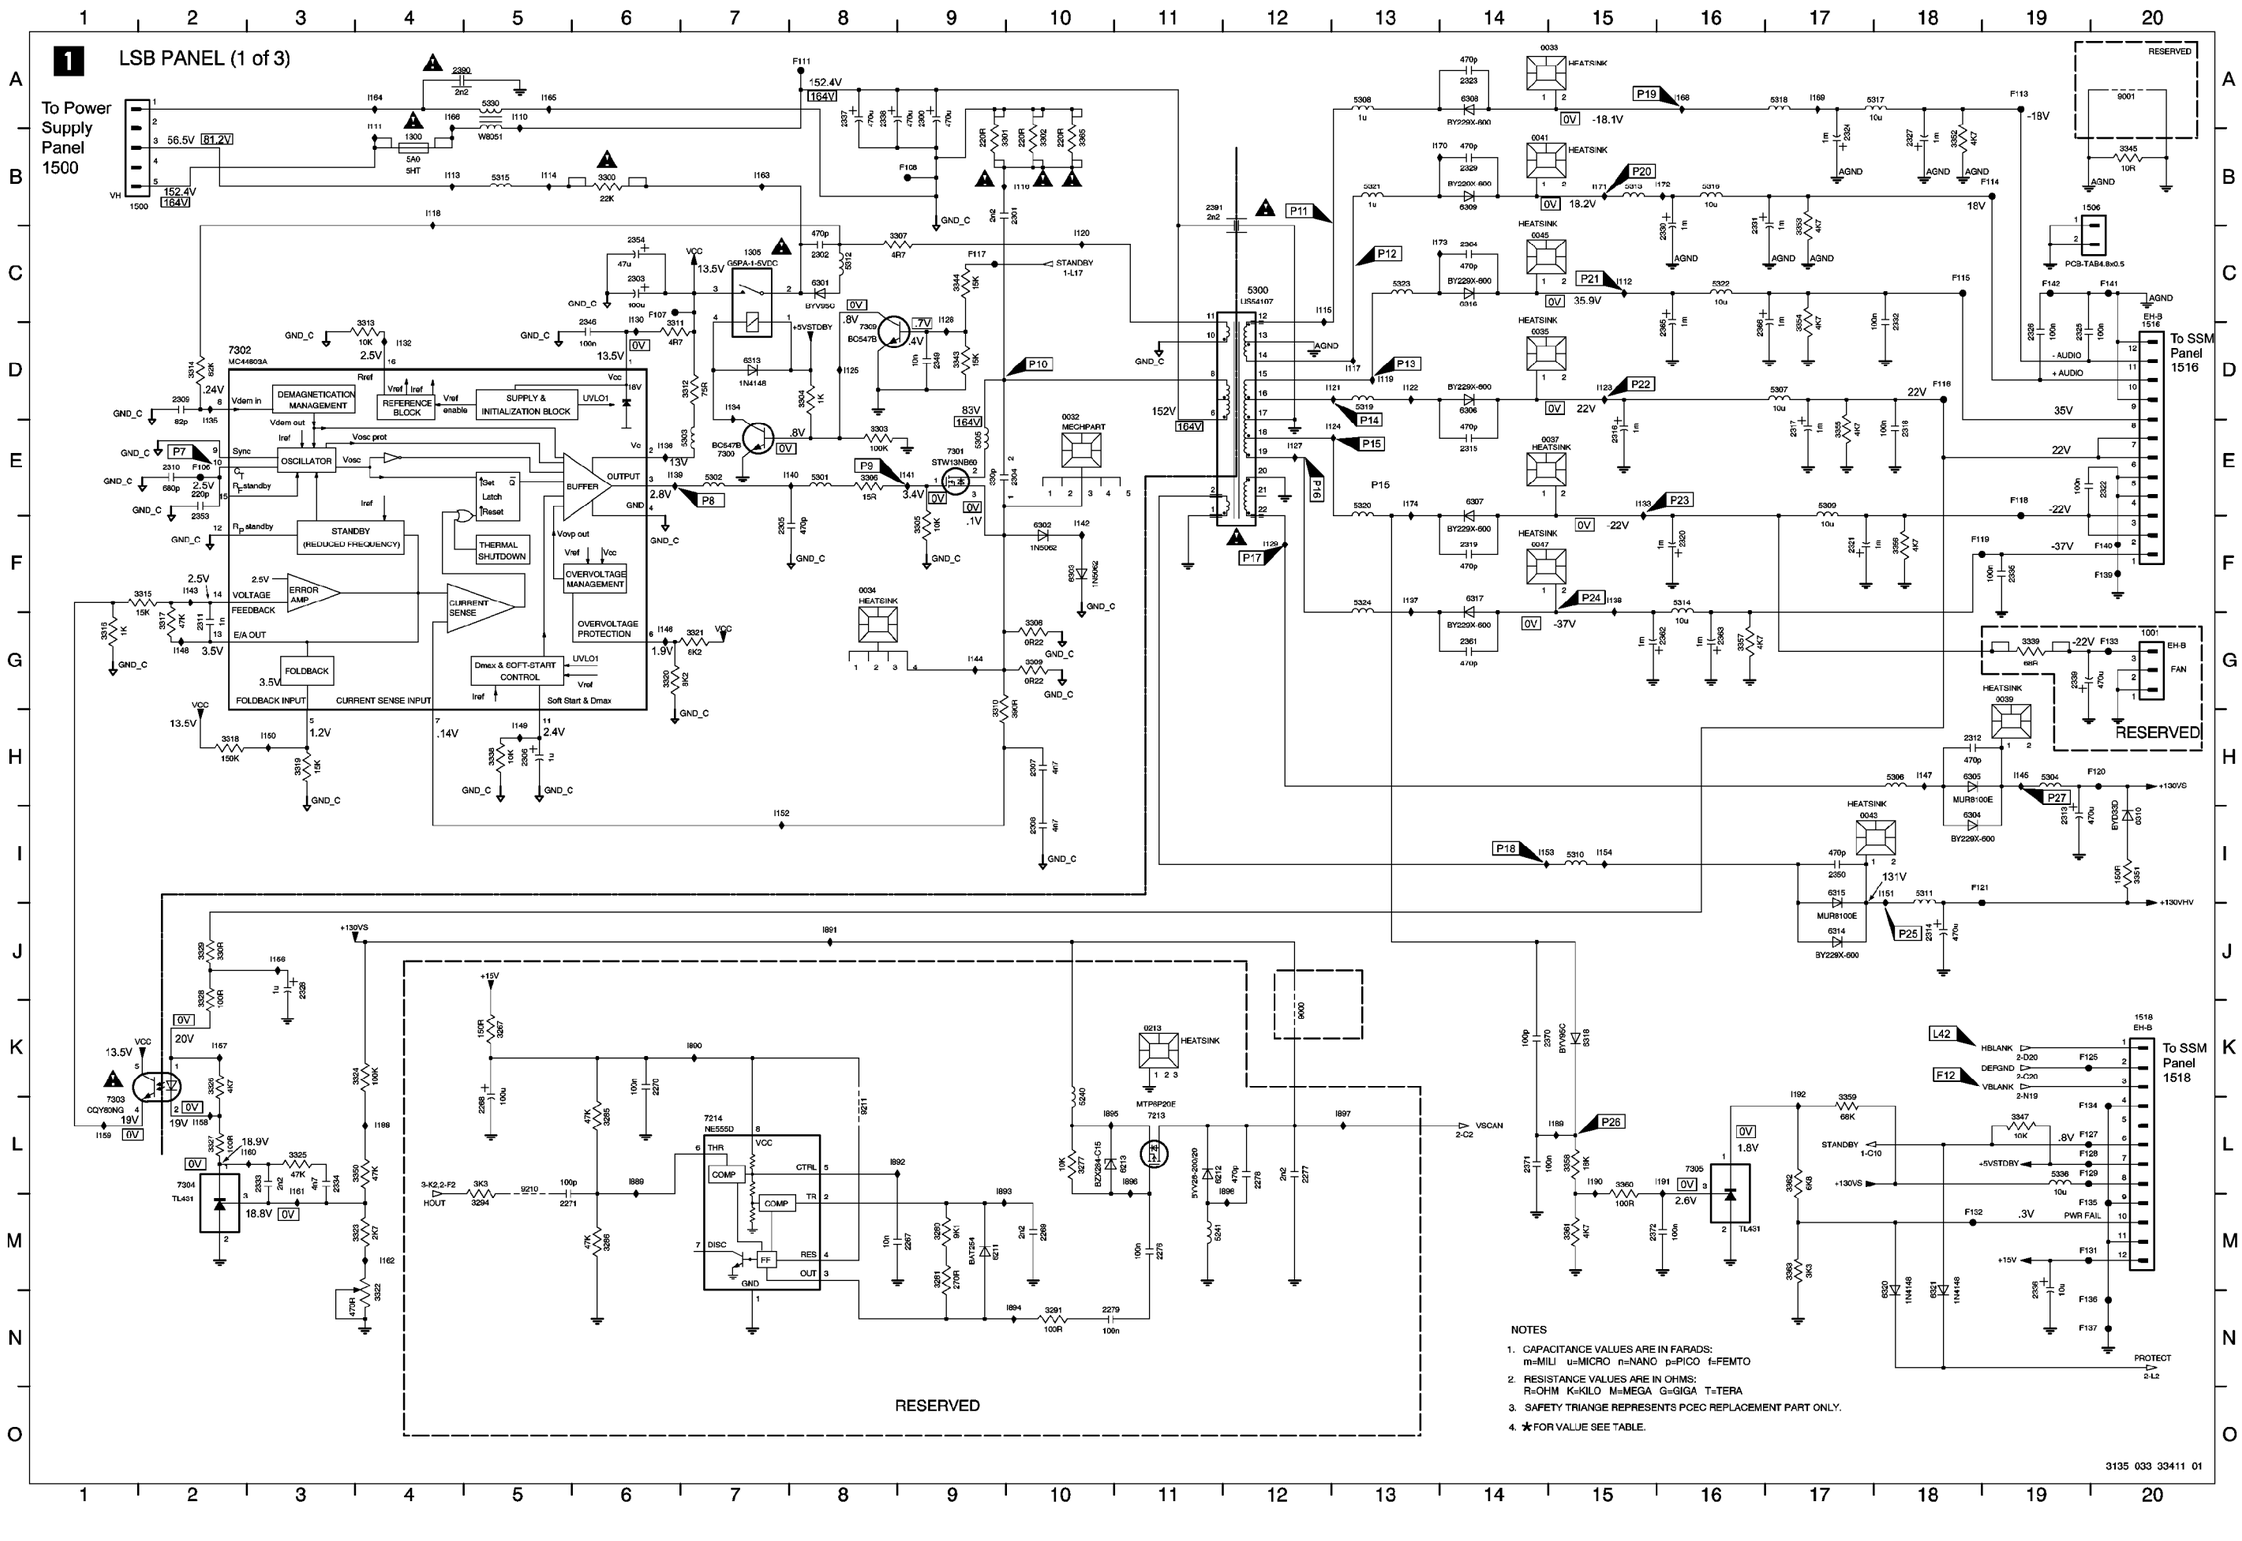

All Models (7621) - LSB Panel Schematic, (2 of 3)

2 LSB PANEL (2 of 3)

FILAMENT 2-M11 · F800 · 3801 0R68 · I811 · 1801 T2A MRT · 2804 470u · 2806 100n

0085 HEATSINK · L24 6.8V · I810 2805 470p · 6801 BY229X-200 · I812 L23 · NEG-HCRIZ-PULSE 2-N2

1000 HEATSINK · 6803 BY229X-200 · I814 L15 · 3816 1R · 28V · +30V_CLAMP 2-F11 · 2807 470p · 2808 47u · 3810 1R

VSCAN 1-L14 · 9203 * · 5802 47u * · I820 · 2801 47u

206V · F802 L22 · 2803 470p · I818 · 6802 BYV95C · 2802 22n

I822 L21 · 3817 1R · 5801 US40104 · DEFGND 1-K16 · I825 · 3800 10R · L11 · I813 · L12 · I830 · L13 · 2811 470p · BYV27-200 6805 · I828 · 1804 T1A MRT · F804 · +12V · 2814 1n · BAS216 6807 · 6804 BZX79-A47 · L16 · F803 · HBLANK 1-K19 · 3802 1K

0081 MECHPART · 0180 HEATSINK · L6 Taken w/100:1 Scope Probe · 148V, 1200Vp-p

+130VS · 3840 4K7 · 3830 4K7 · I827 · 5806 UID15201 · I832 · 1m5 2835 · 3838 1R · I833 · 100n 2836

7601 BU2520AF · L5 -.5V · 2821 100n · 3809 4R7 · 5811

+15V · 3866 150R · 3826 27K · 2810 47u · 7803-B LM393D · 3824 1K5 · 3825 100R · I844 · L9 .8V · 7802 2SK2232 · 24.7V · L10 · 6825 BZX284-C10 · L7 4.8V · 5.3V · L8 · I848 .7V · +30V_CLAMP 2-B20 · BZX284-C15 9632 · 2847 470p · 6827 BYV27-200 · 2833 47u · 3822 68K · BAS216 6821 · 3823 1R0 · I852 · I850 · 2819 22n · 2820 4u7 · 6809 BYD33J · 3808 470R · 3807 47R · 2815 10u · 5806 2200u · 2816 430n · 5804 5u1 · I835 · I836 · I845 · I847 L19 · 2850 510n · DYN-FOCUS-LOW 3-C2 · DYN-FOCUS-HIGH 3-D2 · DM-INPUT 3-L9 · HOT-COLLECTOR 3-N2 · VERT-PARABOLA 3-F2

L20 · 5807 2m2 · F806 · 2839 1n · 3822 1R0 · 3827 1K · 2830 22n · BAS216 6830 · HVG-ON 3-K19

HOUT 3-K2,1-M4 · 3834 47R · I842 · I840 · 3835 470R · I841 · L3 · 7807 BSN304 · I838 · 62V · L4 · 2.3V · 330p 2840 · 2K2 3836 · BZX284-C10 6813 · 1n 2831 · I849 · 3832 100K · I854 · 470p 2834 · 4R7 3837 · 6816 BZX79-C68 · 6812 BZX79-C68

I857 · 0082 HEATSINK · 7811 TDA8177 · GND · PROTECTION THERMAL · AMPLIFIER POWER · GENERATOR FLYBACK · VSUP · VSUPO · FLYB · F6 -12.5V · .6V · .7V · 12.9V · 13V · .03V · F7 · F2 VDOA 3-K2 · 3812 100R · I873 · F4 · 3824 4r7 · 2823 2n2 · 1K27 3816 · F3 VDOB 3-K2 · 3811 100R · I869 · F5 · 2822 4r7 · 1K37 3814 · I875 · 2825 100n · I878 · 6811 BYV27-200 · F8 · 2826 100n · 2827 100n · 3819 470R · 3818 1R5 · 470n 2828 · I876 · 3808 220R · 1501 148V · 3804 220R · 1502 148V · 3805 220R · 1503 148V · 1900 · To RED Deflection Yoke · To GREEN Deflection Yoke · To BLUE Deflection Yoke · HORIZ_HI · HORIZ_LO · V_OUT_HI · V_OUT_LO · -13V · +13V · I831 · 3821 1R5 · 3820 1R0

L25 · NEG-HCRIZ-PULSE 2-A20 · 3846 1R · I882 · 6822 BYV95C · F808 · 3847 100K · I884 · L26 · 3840 47K · 7810 BC847B · -.4V · 2.8V · 2840 2n2 · 10n 2841 · 6823 BAS216 · 3801 10K · 6824 BZX284-C10 · F9 · I865 · 6814 BZX284-C10 · 2837 1u · 10K 3842 · 470K 3841 · +15V · L27 · F10 · I866 · 7808 BC847B · 3843 2K2 · -.4V · BAS216 6815 · 3857 100R · 3858 1K · I858 · 2.8V · 5.2V · 7906 BC847B · 2845 100n · I861 · 6817 · 6818 BAS216 · BAS216 · L28 · 2.2V · .5V · 7612 BF423 · L29 · 3852 100R · I867 · L32 · 3853 10K · I868 · L30 · 6819 BZX79-C18 · 2843 10n · 2.8V · .7V · 7813 BC847B · L33 · 3854 10K · .03V · I864 · 3855 330R · I862 · 6820 BZX284-C10 · 3856 4K7 · L34 · 13.9V · 3867 10K · BAS216 6831 · 14.6V · 7814 BC857B · L35 · 3858 4K7 · 2844 10u · PROTECT 1-N20 · 3844 22K · I871 · 1n 2838 · 1n 2839 · 10K 3845 · BAS216 6829 · .2V · 7809 BC847B · 2.8V · 6826 BZX284-C10 · 3849 2K2 · I874 · 9618 · 5809 47u · 3839 47K · I877 · 15K 3859 · 15K 3862 · 15K 3864 · I880 · 2842 1u · -200V · 1002 EH-B · 1102 EH-B · 1202 EH-B · G1 · FILAMENT 2-A2 · 200V · RESERVED · To BLUE CRT Panel 1202

	USA BASIC 4:3	USA BASIC 16:9	USA CORE 4:3	USA CORE 16:9	
Ref Des	313503710961	313503710991	313503711001	313503711011	NOT_USED
1002	NOT USED	NOT USED	NOT USED	NOT USED	242202512479 EH-B
1102	NOT USED	NOT USED	NOT USED	NOT USED	242202512479 EH-B
2816	NOT USED	NOT USED	NOT USED	NOT USED	222247990022 430n
3820	319801211060 1R0	319801211580 319801211 1R5	319801211060 1R0	319801211580 319801211 1R5	319801211060 1R0
5802	242253595262 47u	242253595262 47u	242253595262 47u	242253595262 47u	NOT USED
9203	NOT USED	NOT USED	NOT USED	NOT USED	310803690010

3135 033 33411 01

3 LSB PANEL (3 of 3)

To Focus/G2 Block

To SSM Panel 1510

RESERVE

	USA BASIC 4:3	USA BASIC 16:9	USA CORE 4:3	USA CORE 16:9	
Ref Des	313503710981	313503710991	313503711001	313503711011	NOT USED
1505	NOT USED	NOT USED	NOT USED	NOT USED	242201518552 PCB-TAB4.8x0.5
5903	NOT USED	NOT USED	NOT USED	NOT USED	319901690020

3135 033 33411 01

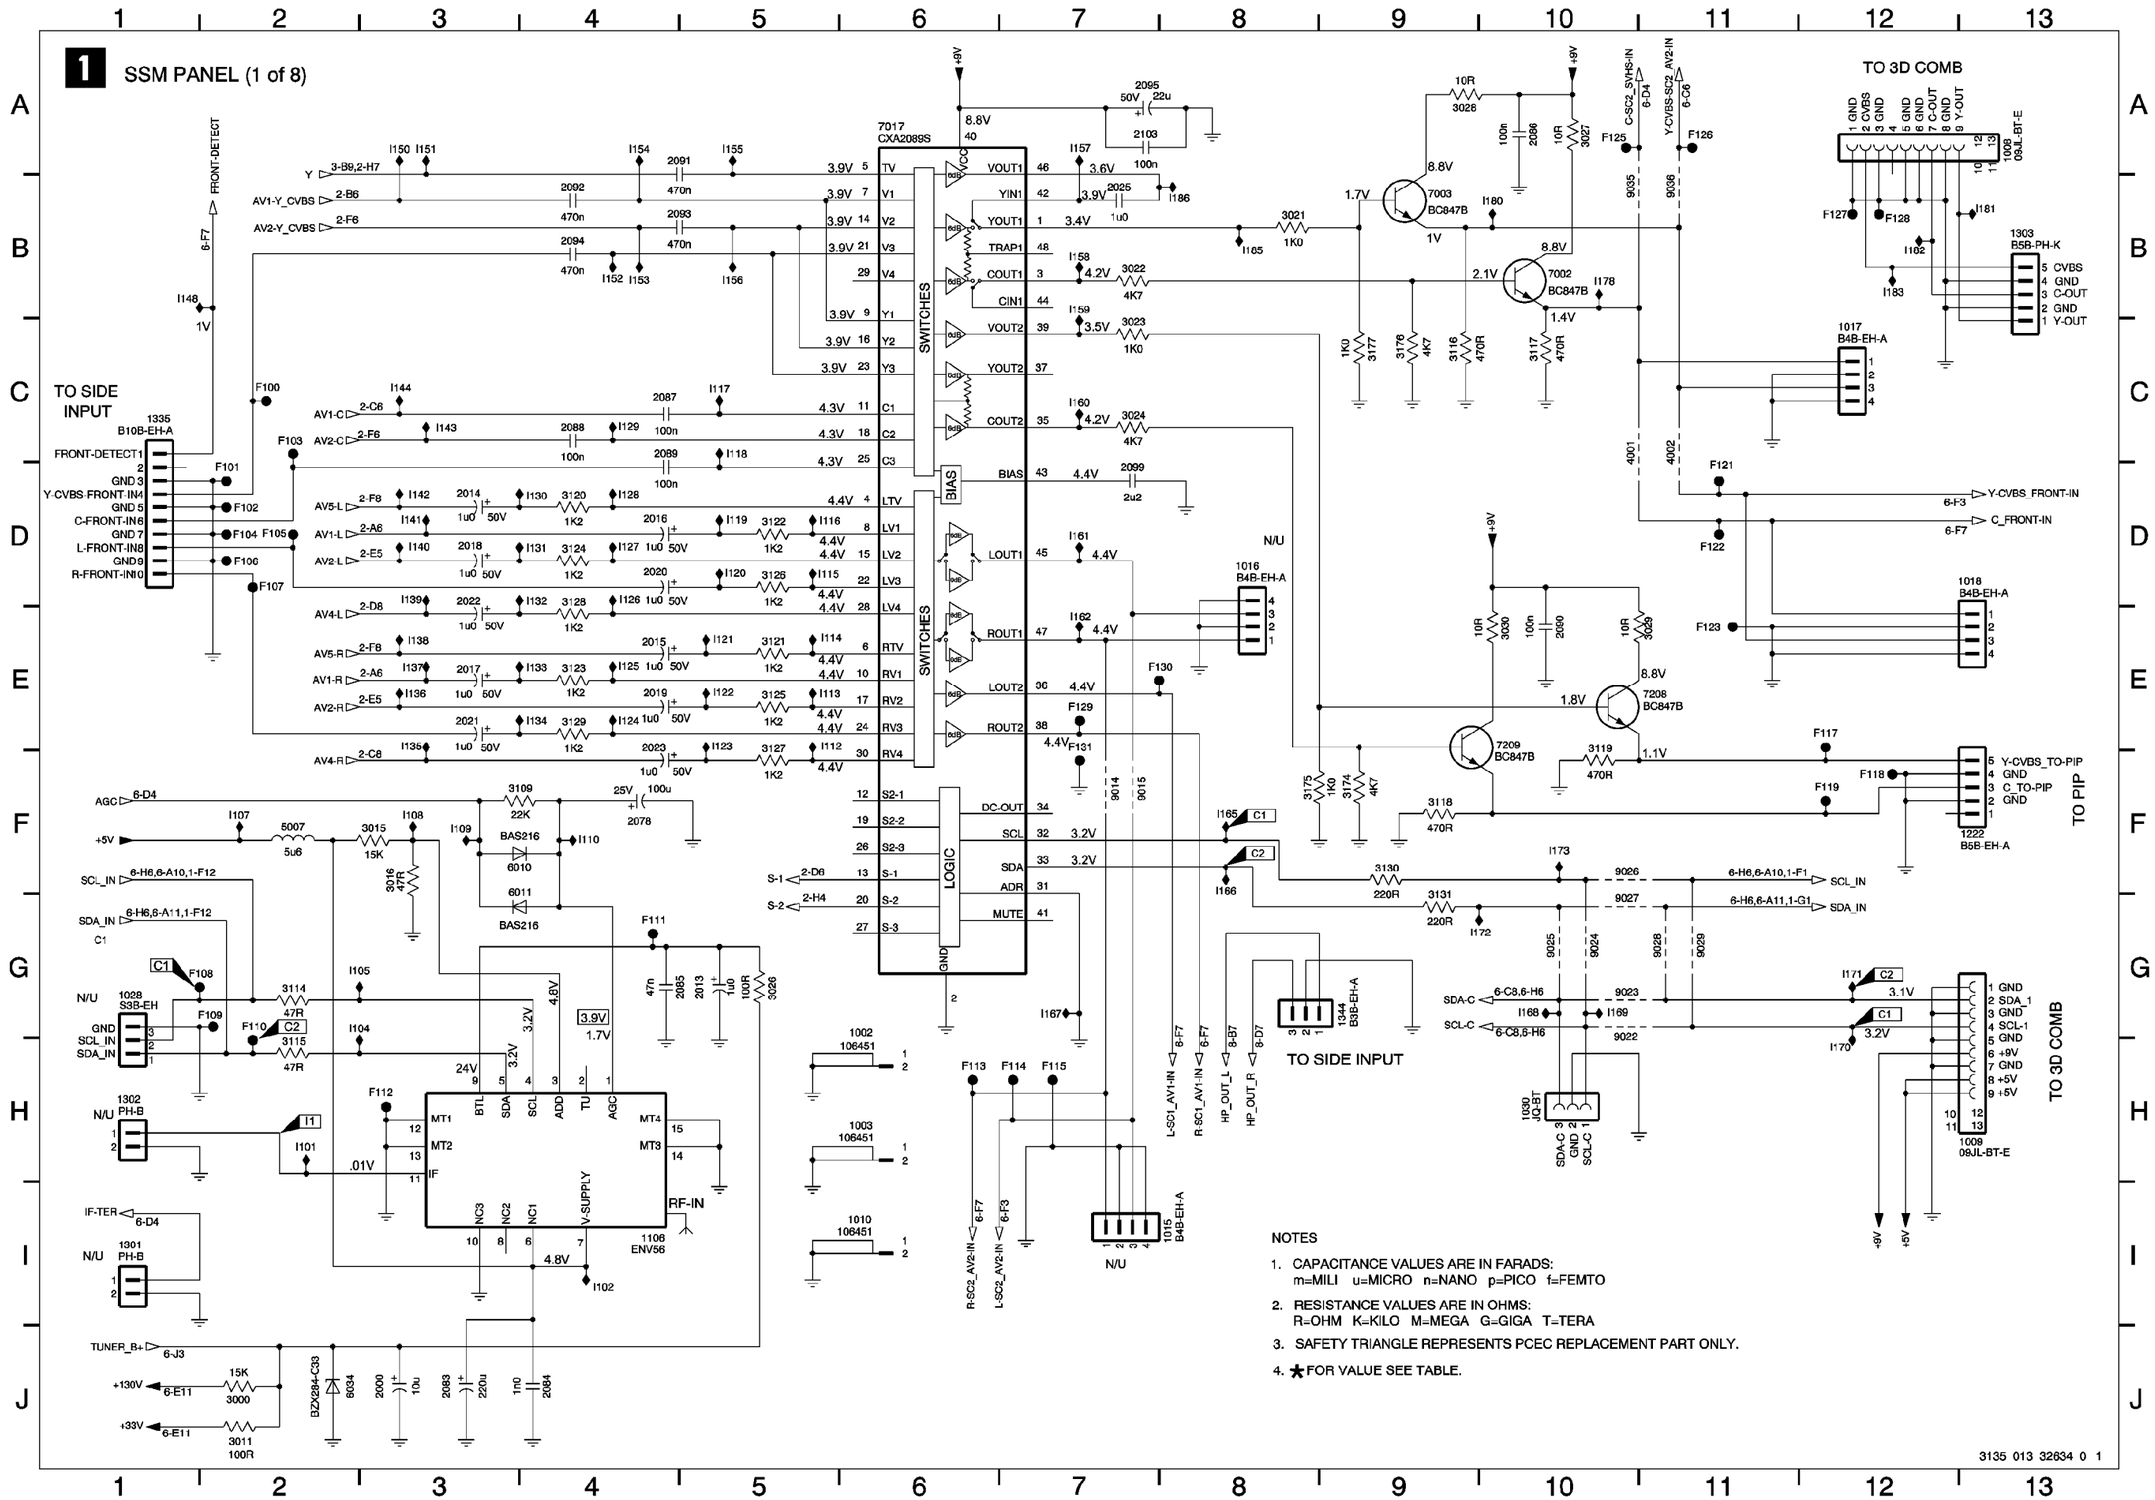
1 SSM PANEL (1 of 8)
TO SIDE INPUT
1335 B10B-EH-A
FRONT-DETECT1
GND 3
Y-CVBS-FRONT-IN4
GND 5
C-FRONT-IN6
GND 7
L-FRONT-IN8
GND9
R-FRONT-IN10
7017 CXA2089S
SWITCHES
LOGIC
BIAS
VOUT1
YIN1
YOUT1
TRAP1
COUT1
CIN1
VOUT2
YOUT2
COUT2
BIAS
LOUT1
ROUT1
LOUT2
ROUT2
DC-OUT
SCL
SDA
ADR
MUTE
GND
TO 3D COMB
1303 B5B-PH-K
1017 B4B-EH-A
1018 B4B-EH-A
1016 B4B-EH-A
N/U
1222 B5B-EH-A
TO PIP
1008 08JL-BT-E
TO 3D COMB
1344 B3B-EH-A
TO SIDE INPUT
1028 S3B-EH
1302 PH-B
1301 PH-B
1106 ENV56
RF-IN
1002 106451
1003 106451
1010 106451
1015 B4B-EH-A
N/U
1030 JQ-BT
7003 BC847B
7002 BC847B
7208 BC847B
7209 BC847B
NOTES
1. CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ★FOR VALUE SEE TABLE.
3135 013 32634 0 1

2 SSM PANEL (2 of 8)

1024-11 YKC21-2921 20 L D2 23 — F225 F226 — 3045 100R — 1-D2 AV1-L
1024-10 YKC21-2921 19 R D1 22 — F228 F227 — 3046 100R — 1-E2 AV1-R
1024-12 YKC21-2921 21 V D3 24 — F229 — 3047 100R — 1-B2 AV1-Y_CVBS
F230 F231 — 3048 100R — 1-C2 AV1-C
AV1 IN: 1025 YKF51-5347 — F234 F233 — I208
I209 — 1-F5 S-1
+Vp 8.5V I217 — 3142 1R0 — I218 +9V
I216 — +Vp 8.5V — 6018 BAV99 — +Vp 8.5V — 6020 BAV99
47K 3002 — 330p 2062 — 47K 3003 — 330p 2063 — 100n 2102
75R 3102 — 75R 3103 — 22p 2068 — 22p 2069 — 330p 2076

1024-2 YKC21-2921 2 L A2 5 — F235 F236 — 3049 100R — 1-D2 AV2-L
1024-1 YKC21-2921 1 R A1 4 — F237 F238 — 3050 100R — 1-E2 AV2-R
1024-3 YKC21-2921 3 V A3 6 — F239 F240
47K 3004 — 330p 2066 — 47K 3005 — 330p 2067
I204 — F241 — 3051 100R — 1-B2 AV2-Y_CVBS
F242 — 3052 100R — 1-C2 AV2-C
AV2 IN: 1026 YKF51-5347 — F243 F244 — I200
1-F5 S-2 — 330p 2077
+Vp 8.5V — 6021 BAV99 — +Vp 8.5V — 6023 BAV99
3104 75R — 3105 75R — 22p 2071 — 22p 2072

CVBS-SC2_MON-OUT 6-D4 — F251 V1 — 3145 1K0 — V2 — 2104 100n — 8.8V — 7016 BC847B — 2.5V — 1.8V — I221 V3
1K0 3146
3144 10R — +9V
1029 YKC21-3416 — F200 F201 — 3073 150R — BZX284-C6V8 6031 — I240 — 6030 BZX284-C6V8 — I241 — 8-C12 SUB_WOOF
6014 BAV99 — 8.5V +Vp
L-CL_VL-OUT 6-F3 — F249 — 3101 150R
R-CL_VL-OUT 6-F7 — F247 — F248
3100 68R — 3072 150R — F205
22p 2070
F202 F203 F204 F206 F207 — V4
1024-5 YKC21-2921 8 11 L B2
1024-4 YKC21-2921 7 10 R B1
1024-6 YKC21-2921 9 12 V B3
AV OUT
F209 — 3053 100R — AV4-R 1-E2 — AV4-L 1-D2
6026 BZX284-C6V8 — BZX284-C6V8 6027 — 6022 BZX284-C6V8 — BZX284-C6V8 6025
3006 47K — 2079 330p — 3008 47K — 2081 330p
F211 — 3054 100R — F208 — 1021 JPJ9811 1 3 2 — F210

6032 BZX284-C6V8 — BZX284-C6V8 6016
F222 F223 F224 — 1011 B3B-EH-A
6037 BZX284-C6V8 — BZX284-C6V8 6036
3012 100R — 3013 100R — F213 — 1027 JPJ9022 1 4 5 2 3 — F212
AV5-R 1-E2 — AV5-L 1-D2 — 3055 100R — 6017 BZX284-C6V8 — BZX284-C6V8 6019
3056 100R — 6012 BZX284-C6V8 — BZX284-C6V8 6013 — F214 — F215
3007 47K — 2080 330p — 3009 47K — 2082 330p

I224 — 9011 — I228
I227 — 9012
I225 — 3-B9,1-A2 Y — 9013 — I226
Pb 3-E9 — Pr 3-H9 — 1207 B4B-EH-A — GND 4 Pr 3 Y 2 Pb 1 — N/U
1031 B5B-EH-A — 5 GND 4 3 GND 2 1 — N/U
+Vp 8.5V
6024 BAV99 — 6028 BAV99 — 6029 BAV99
3057 100R — 3058 100R — 3059 100R
22p 2075 — 75R 3106 — 22p 2074 — 75R 3107 — 22p 2073 — 75R 3108
F216 F217 F218 F219 F221 — 1024-9 YKC21-2921 15 18 Y C3
1024-8 YKC21-2921 14 17 Pb C2
1024-7 YKC21-2921 13 16 Pr C1

3135 013 32634 0 1

3 SSM PANEL (3 of 8)

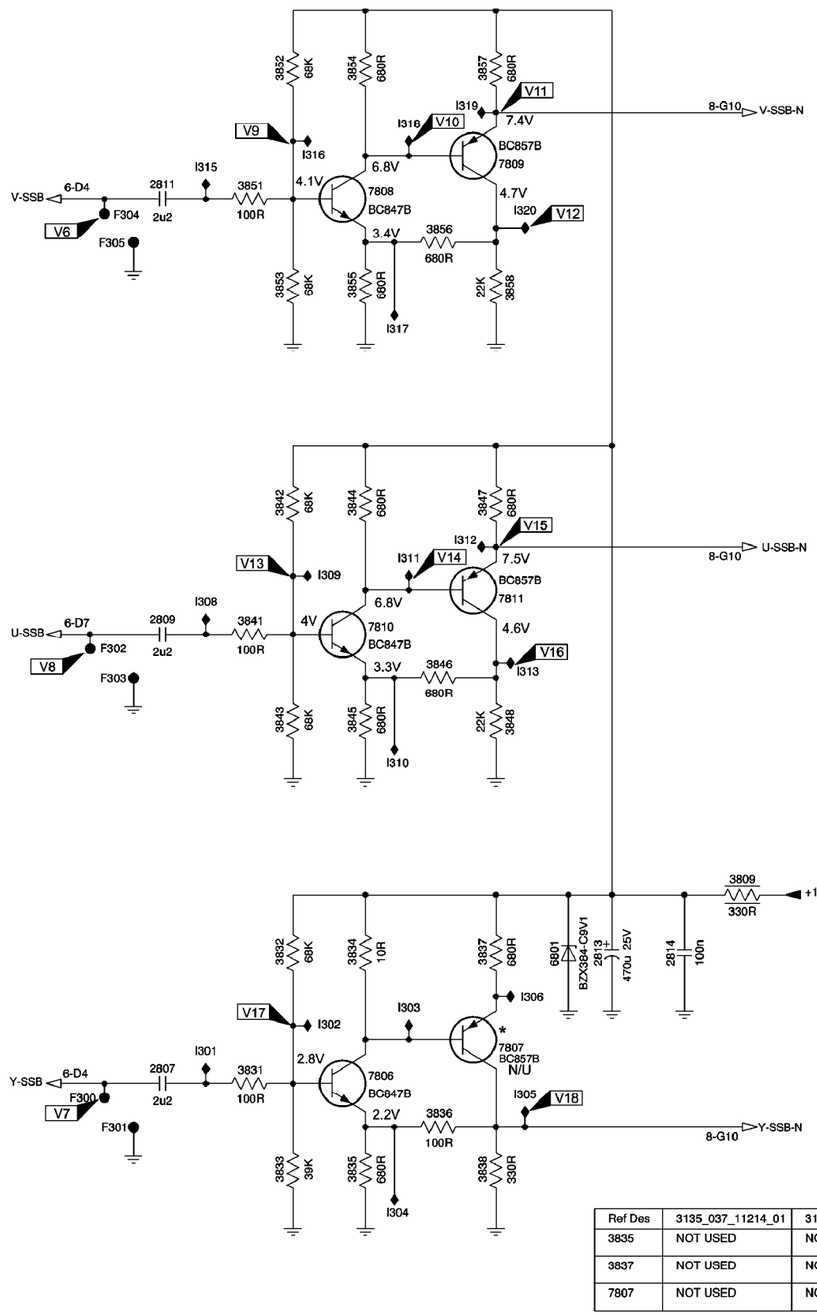

Ref Des	3135_037_11214_01	3135_037_11244_01	RESERVED
3835	NOT USED	NOT USED	319802156810 680R
3837	NOT USED	NOT USED	319801106810 680R
7807	NOT USED	NOT USED	319801042150 BC857B

3135 013 32634 01

4 SSM PANEL (4 of 8)

Ref Des	3135_037_11214_01	3135_037_11244_01	RESERVED
9009	NOT USED	NOT USED	319803690010
9010	NOT USED	NOT USED	319803690010

3135 013 32634 01

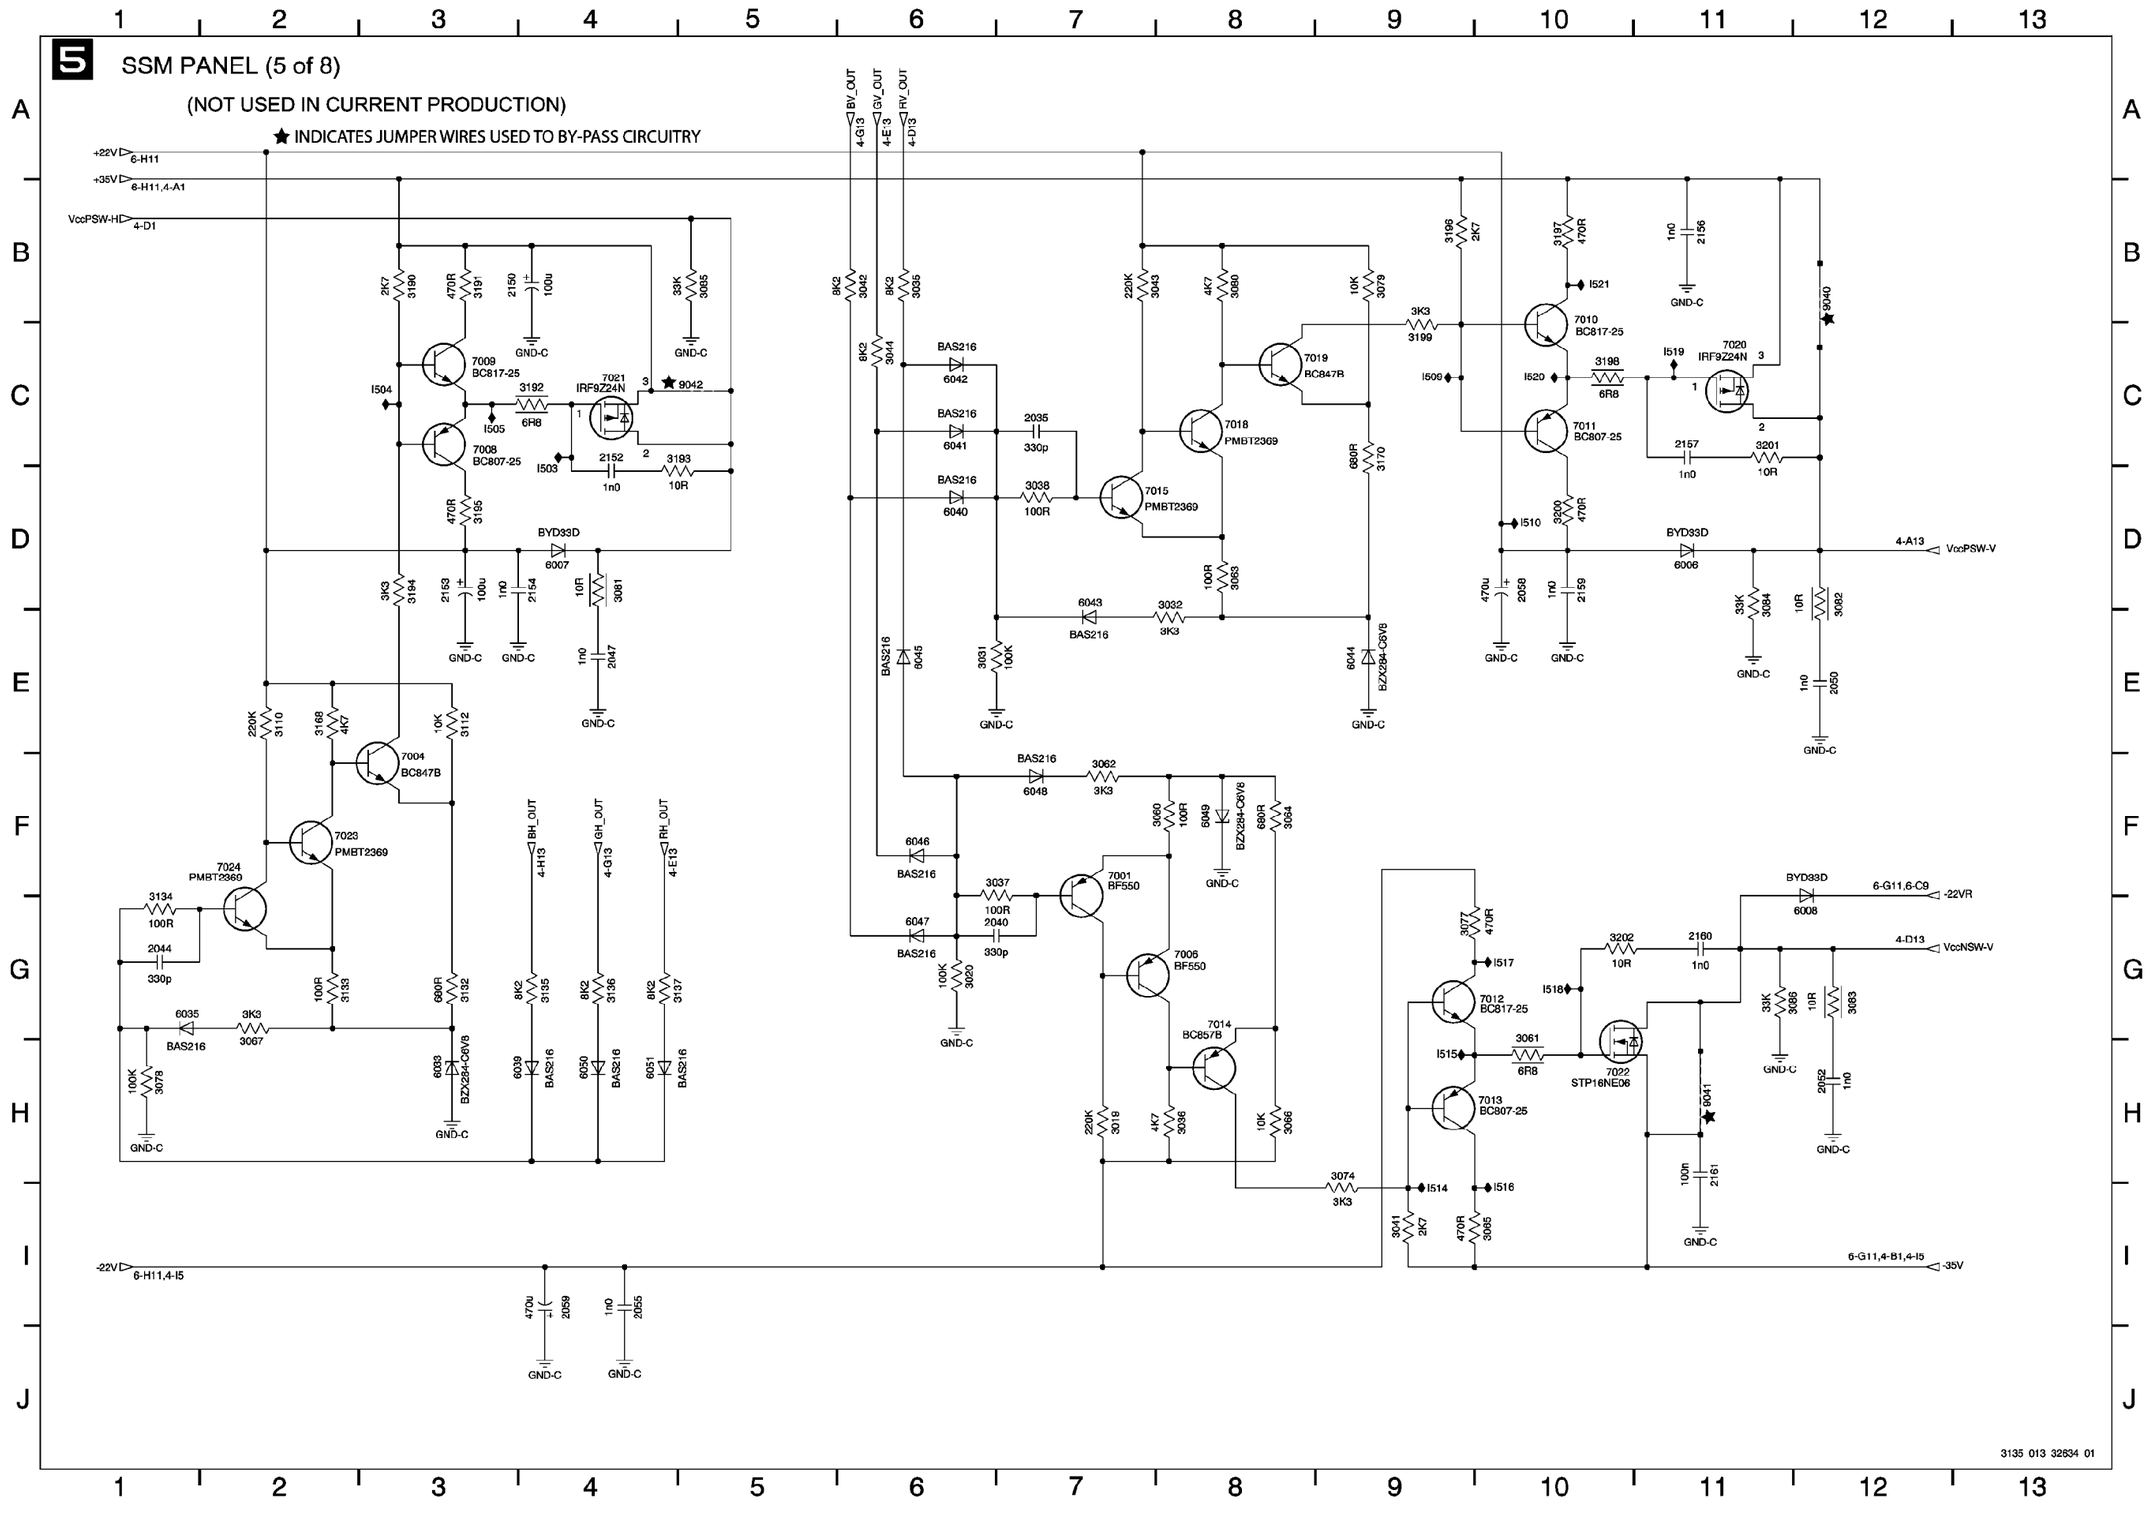
5
SSM PANEL (5 of 8)
(NOT USED IN CURRENT PRODUCTION)
★ INDICATES JUMPER WIRES USED TO BY-PASS CIRCUITRY
+22V 6-H11
+35V 6-H11,4-A1
VccPSW-H 4-D1
BV_OUT 4-G13
GV_OUT 4-E13
RV_OUT 4-D13
7009 BC817-25
7008 BC807-25
7021 IRF9Z24N
9042
7004 BC847B
7023 PMBT2369
7024 PMBT2360
7018 PMBT2369
7015 PMBT2369
7019 BC847B
7001 BF550
7006 BF550
7014 BC857B
7010 BC817-25
7011 BC807-25
7020 IRF9Z24N
9040
7012 BC817-25
7013 BC807-25
7022 STP16NE06
BYD33D 6007
BYD33D 6006
BYD33D 6008
BAS216 6042
BAS216 6041
BAS216 6040
BAS216 6045
BAS216 6048
BAS216 6046
BAS216 6047
BAS216 6039
BAS216 6050
BAS216 6051
BAS216 6043
BZX284-C6V8 6033
BZX284-C6V8 6049
BZX284-C6V8 6044
6035 BAS216
6041
BH_OUT 4-H13
GH_OUT 4-G13
RH_OUT 4-E13
4-A13 VccPSW-V
VccNSW-V 4-D13
-22VR 6-G11,6-C9
-35V 6-G11,6-B1,4-I5
-22V 6-H11,4-I5
GND-C
I504
I505
I503
I506
I509
I510
I514
I515
I516
I517
I518
I519
I520
I521
3135 013 32634 01

All Models (7621) - SSM Panel Schematic, (6 of 8)

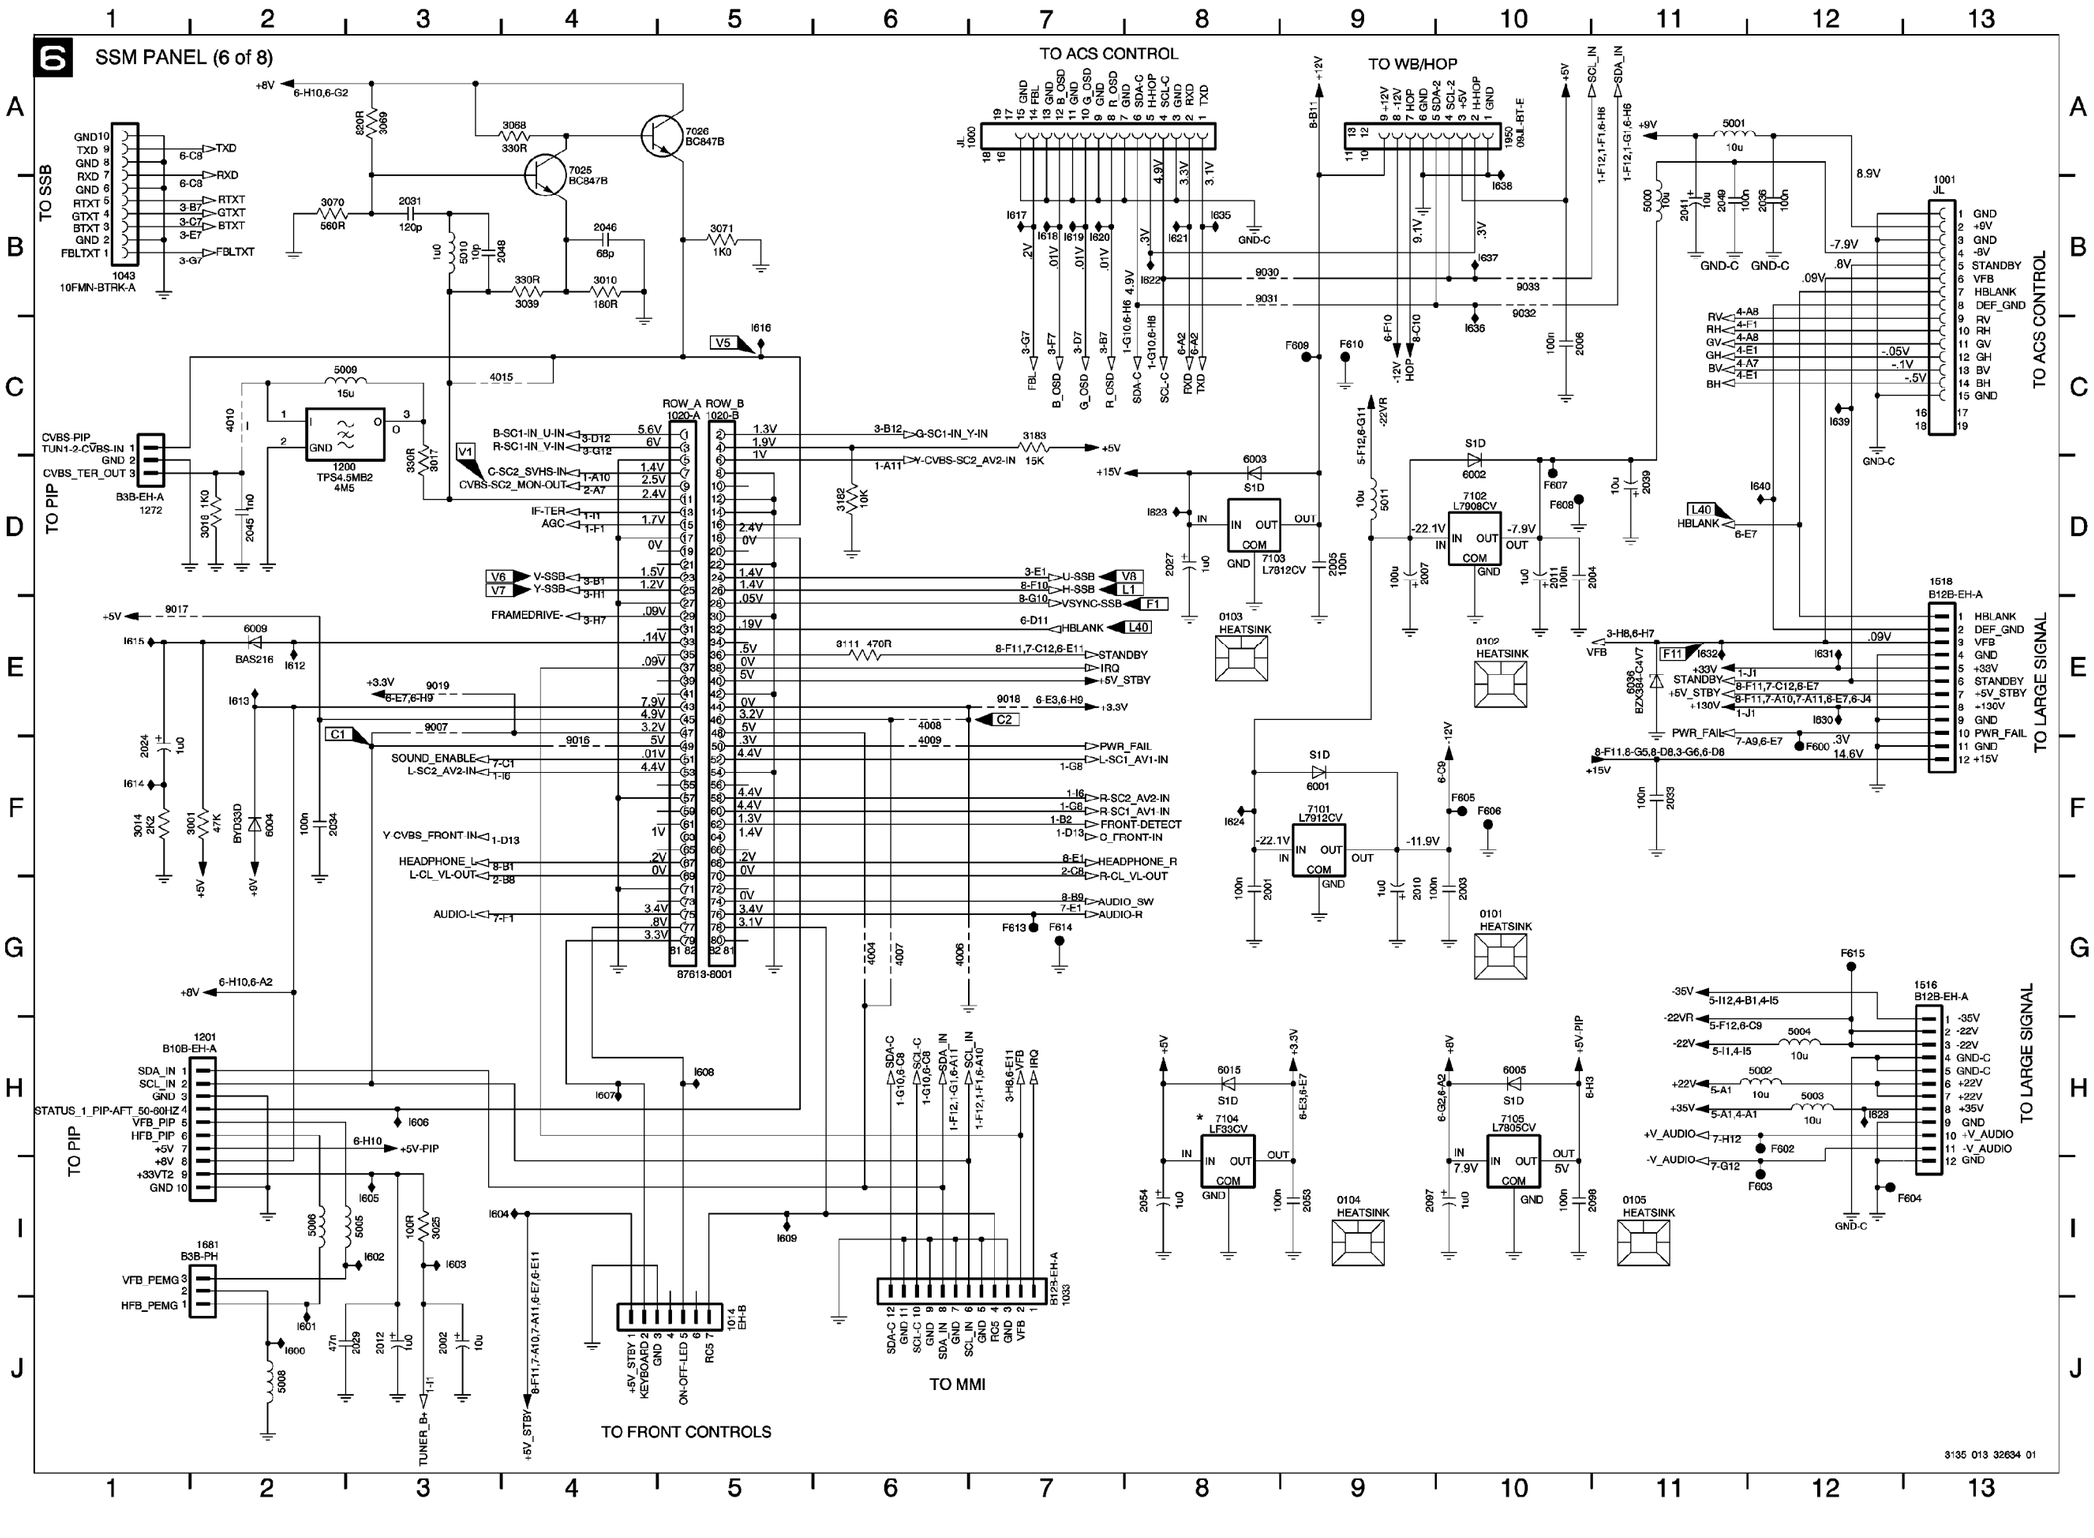

7 SSM PANEL (7 of 8)

SOUND_ENABLE 6-F3
AUDIO-R 6-G7
AUDIO-L 6-G3
PWR_FAIL 6-E11,6-E7
+5V_STBY 8-F11,6-E11,6-J4,6-E7,7-A11
+5V_STBY 8-F11,6-E11,6-J4,6-E7,7-A10
STANDBY 8-F11,6-E11,6-E7
-V_AUDIO 6-H11
+V_AUDIO 6-H11
TO CENTER CHANNEL
1 RIGHT
2 GND
3 GND
5 LEFT
7700 TDA7490
1702 BT169B 6701 E.P. Screened
1700 MRT T 2000mA
1701 MRT 2000mA T
0001 HEATSINK

3135 013 32634 01

8 SSM PANEL (8 of 8)

HEADPHONE_L 6-F3
HEADPHONE_R 6-F7
7403 TDA1308
INA_NEG
INA_POS
INB_NEG
INB_POS
OUTA
OUTB
VDD
VSS
HP_OUT_L 1-G8
HP_OUT_R 1-G8
USED WITH SUB-WOOFER MODELS ONLY
AUDIO_SW 6-G7
7415 BC847B
SUB_WOOF 2-A13
0106 HEATSINK
7106 LM317T
6052 BAS316
+15V
+12V
+5V
+9V
6-C9 HCP
TO WB/HOP
TO INPUT BOARD
1102 B12B-EH-A
+5V_STBY
STANDBY 7-C12,6-E11,6-E7
+15V 6-F11,6-D8,3-C6,8-D8,8-G5
H-SSB 6-D7
VSYNC-SSB 6-D7
Y-SSB-N 3-H5
U-SSB-N 3-D5
V-SSB-N 3-B5
1610 B5B-EH-A
TXTFBL 3-G8
BLUTXT 3-F8
GRNTXT 3-D8
REDTXT 3-B8

USED ON CERTAIN MODELS ONLY	BASIC	CORE	NOT USED
3135_037_11214_01	X		
3135_037_11244_01		X	
RESERVED			X

3135 013 32634 01

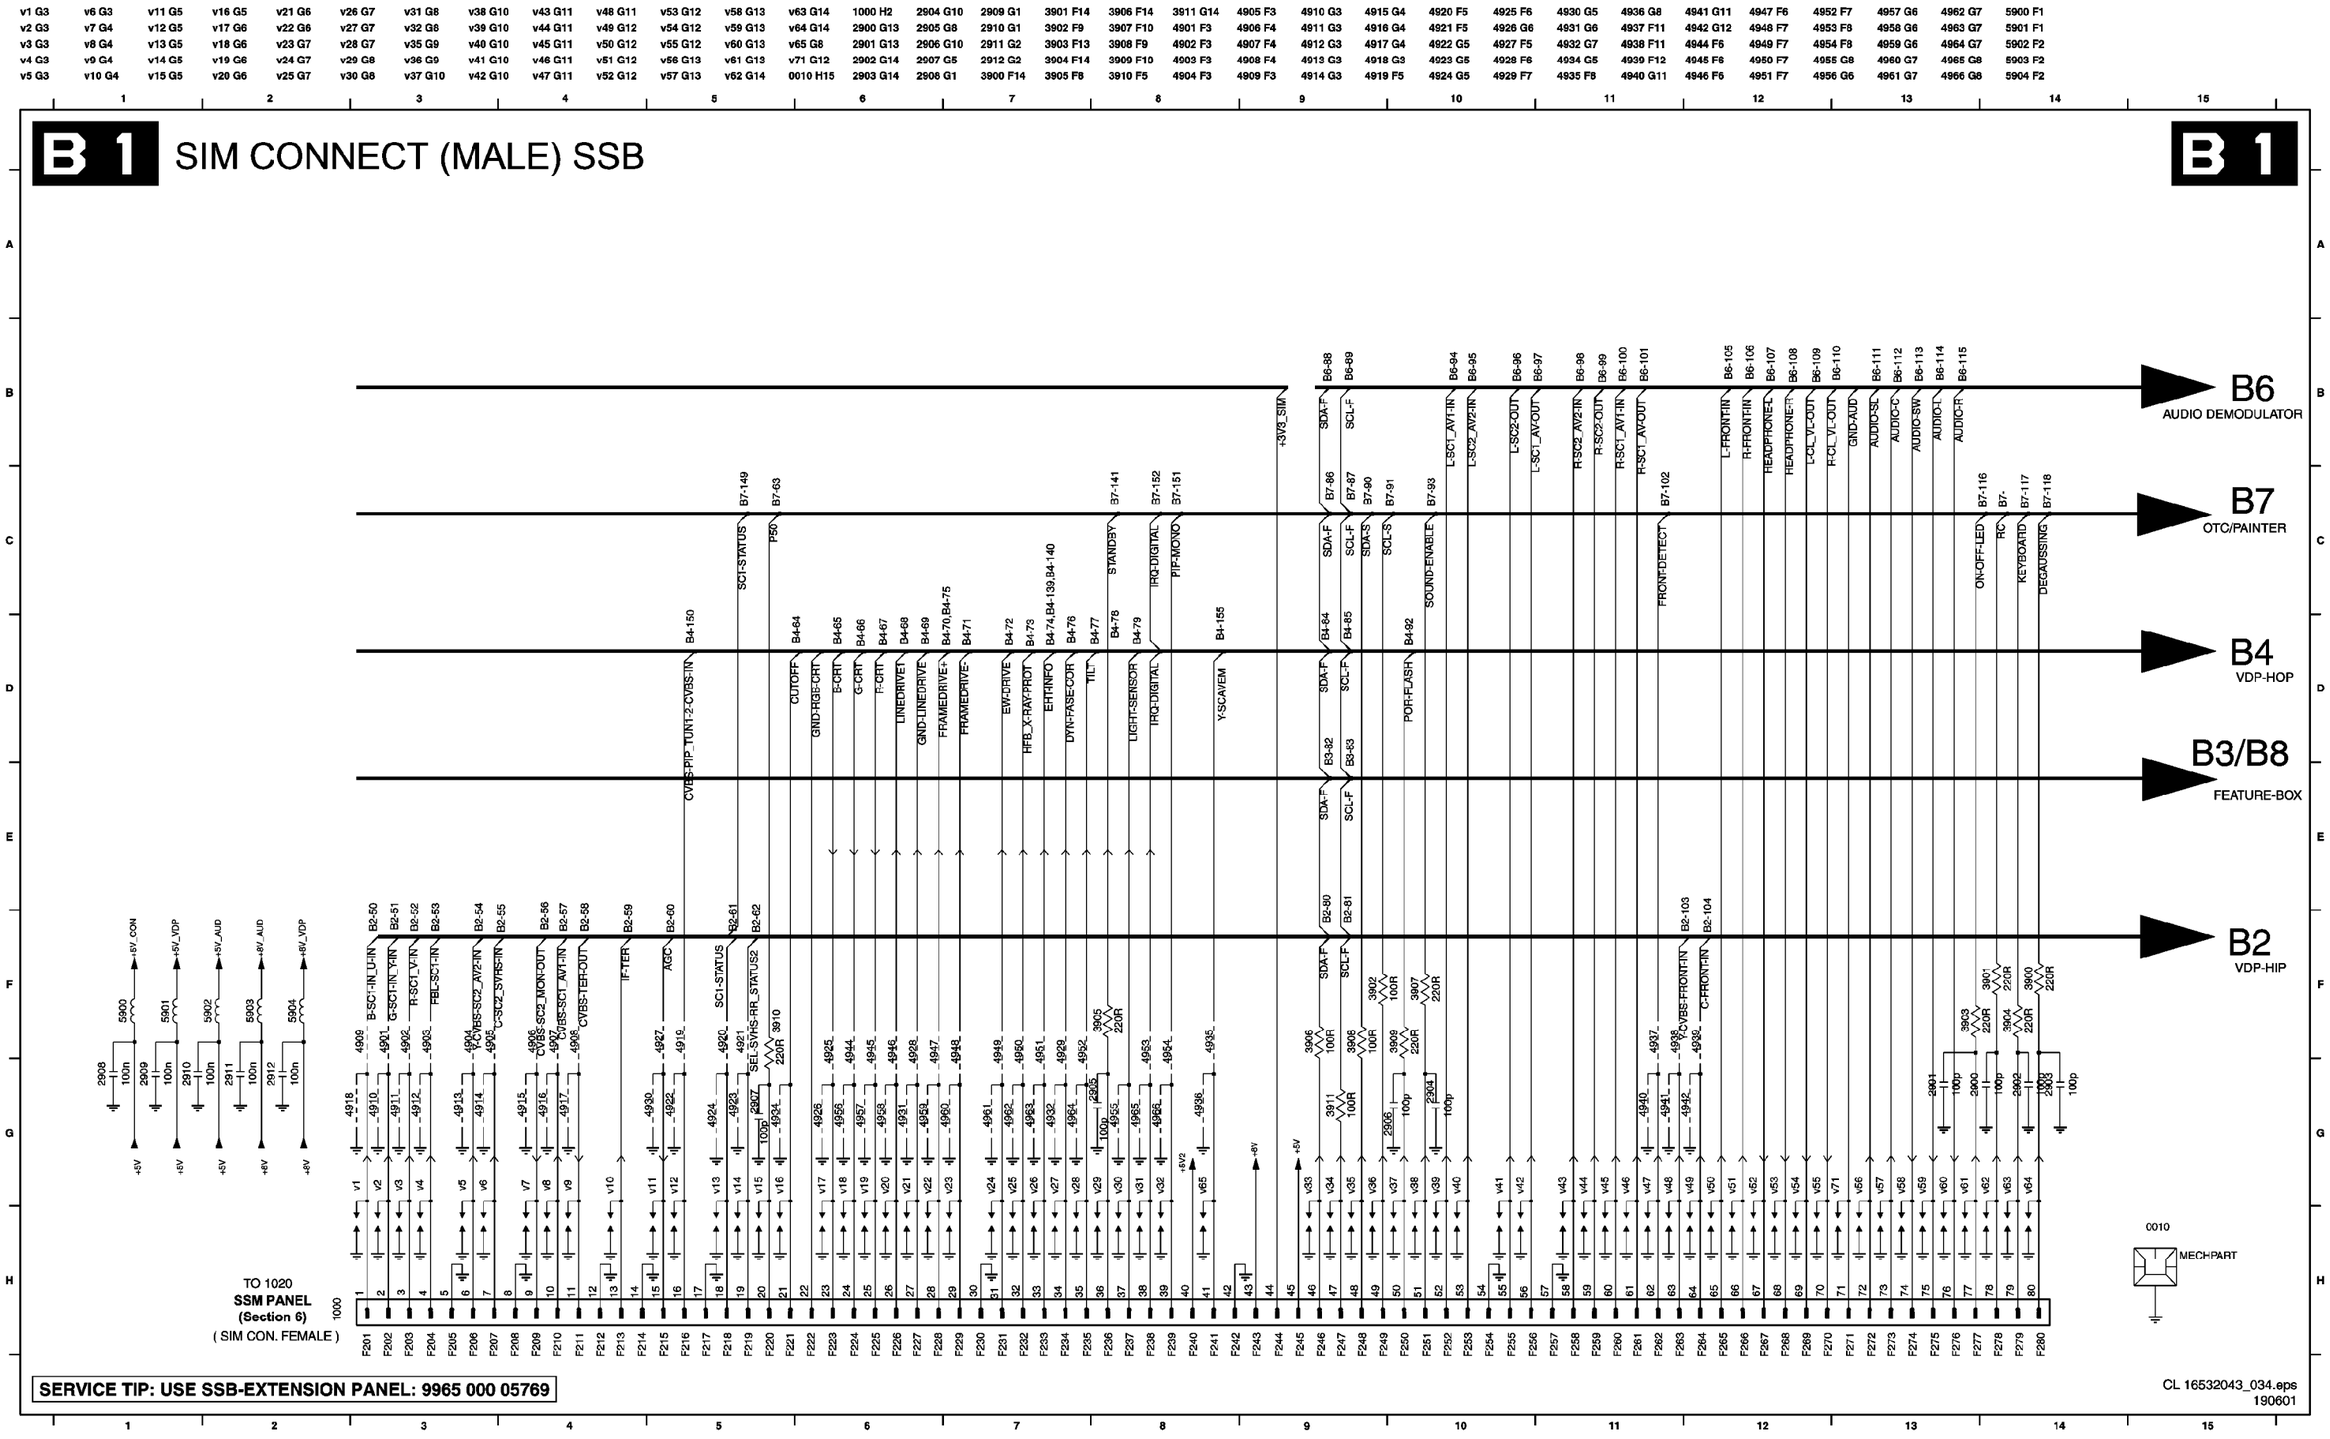
B 1
SIM CONNECT (MALE) SSB
B 1
B6
AUDIO DEMODULATOR
B7
OTC/PAINTER
B4
VDP-HOP
B3/B8
FEATURE-BOX
B2
VDP-HIP
TO 1020
SSM PANEL
(Section 6)
(SIM CON. FEMALE)
SERVICE TIP: USE SSB-EXTENSION PANEL: 9965 000 05769
0010
MECH PART
CL 16532043_034.eps
190601

B2 IF, I/O VIDEOPROSSING

B2

SAW-FILTER

FROM 0302 OF SSM PANEL (SECTION 1)

TO 1303 OF SSM PANEL (SECT. 1)

NOT USED FOR US

7323 TDA9320H

HIP

IF DEM

GROUP DELAY COR.

I/O SWITCH

LUMA & CHROMA PROC.

7307 TDA9181

OUTP SWITCH

SYNC

CTRL

SUPPLY

7322 BC847B

7320 BC847BW

7410 BC847BW

7411 BC847B

7412 BC857BW

7413 BFS20

1407 TPSCC

1410 TPSCC

1408 K120A

R-SC1_V-IN

G-SC1-IN_Y-IN

B-SC1-IN_U-IN

FBL-SC1-IN

COMB-Y_CVBS-OUT

COMB-C-OUT

CVBS-TXT

CVBS-TER-OUT

CVBS-PIP_TUN1-2-CVBS-IN

CVBS-SC1_AV1-IN

CVBS-AV3-IN

Y-CVBS-SC2_AV2-IN

C-SC2_SVHS-IN

Y-CVBS-FRONT-IN

C-FRONT-IN

CVBS-SC2_MON-OUT

CVBS-TXT

QSS_AM

Cl. 16532043_035.eps 190601

0302 D1	5408 C5	
1303 H13	5409 B5	
1315 E10	5410 H7	
1316 E11	5411 C12	
1317 E12	5412 H13	
1318 E12	5413 H13	
1407 F4	5414 H13	
A 1408 C2	7307 G10	
1410 G4	7320 F8	
2302 G13	7322 E5	
2344 H13	7323 D8	
2345 H13	7410 G5	
2346 I13	7411 D4	
2350 C10	7412 C13	
2351 C10	7413 C11	
2352 C10		
2353 I11		
2354 G11		
2356 E9		
B 2357 F10		
2358 E10		
2359 F10		
2360 E10		
2361 E13		
2362 F13		
2365 F6		
2366 F7		
2367 F7		
2368 F7		
2369 F7		
C 2370 F7		
2371 B10		
2372 B10		
2373 B7		
2374 B7		
2375 B7		
2376 B6		
2377 B5		
2378 B6		
2379 E11		
2380 E12		
2381 F11		
D 2382 F12		
2384 E6		
2385 G12		
2401 C6		
2402 C1		
2410 C5		
2411 C5		
2412 D1		
2413 D3		
2418 D5		
2420 G7		
2421 C13		
E 2422 B12	c002 A7	
2423 C13		
2424 G9		
2425 B1		
3303 H9		
3370 F8		
3371 F8		
3372 F8		
3376 B8		
3377 A8		
3378 B10		
F 3382 E5		
3384 B4		
3385 F6		
3393 E10		
3400 A5		
3401 B5		
3402 F4		
3403 E4		
3405 G5		
3415 B3		
3416 D3		
3417 E5		
G 3418 C6		
3419 F3		
3420 G4		
3436 E4		
3437 D6		
3441 B3		
3446 G7		
3450 B13		
3451 C12		
3452 C12		
3456 G5		
3457 G5		
H 3460 C11		
3461 C10		
3462 C11		
3463 B3		
3464 B1		
3466 H11		
3468 H9		
4318 G10		
4319 F10		
4322 F7		
4326 D10		
4401 H3		
4406 C12		
4407 B3		
4409 D10		
5401 D1		
5406 F4		
I 5407 B5		

B3

FEATURE BOX (100Hz processing)

0013 MECHPART

**: only for PHILIPS DNR memory

7714 MSM54V12222A — FIELD MEMORY — FROM 88-7709 CLK-16 — FROM 9-7709 RSTW

7715 MSM64V12222A — FIELD MEMORY — FROM 88-7709 CLK-32 — FROM 9-7709 RSTR

7716 SOCKET PLCC32 (PICNIC-EPROM)

7713 MC33269D-ADJ

7701 BC857BW — 7702 BC847BW

7709 PICNIC SAA4978H

MICRO-PROCESSOR PSP

BACK END — PEAKING — MUX

3 X DAC

MID END — HISTOGRAM — NOISE REDUCTION — TBC/SRC — MUX

ANALOG PROCESSING — 3 X ADC — FRONT END

PLL — OSC — BST

BUS A — BUS B — BUS C — BUS D

7708 SAA4990H PROZONIC

TO 61-7708 SNERT-DA — TO 62-7708 SNERT-CL — TO 16-7714 AND 7715 RSTW — TO 25-7714 AND 7715 RSTR — TO 80-7708 RSTR

B1-83,B3-SCL-F — B1-82,B3-SDA-F — B4-128 V100 — B4-129 V100 — B4-130 V100 — B4-131,B7-148 HD100 — B4-132 VD100 — B2-152 V-PIP+MAIN-IN — B2-153 U-PIP+MAIN-IN — B2-154 Y-PIP+MAIN-IN — B2-124 HA50 — B2-123 VA50 — B1+B6

CL 16532043_036.eps
190601

0013 A4 3794-C G11
1701 J3 3794-D H11
2702 B3 3795-A H11
2704 B3 3795-B H11
2706 C1 3795-C H11
2707 C2 3795-D H11
2708 C3 3796 F11
2709 C3 3797 C11
2710 C3 3798 A2
2712 D2 4703 F4
2713 D10 4711 E4
2718 F2 4712 F3
2719 F2 4713 G3
2721 G2 4714 F3
2723 G2 4715 G2
2725 G2 4716 F2
2726 G2 4717 F2
2728 B14 4723 D10
2729 H1 4724 A11
2730 H4 4725 A11
2731 I1 4726 C11
2733 I2 4728 H12
2738 J2 4731 C11
2743 J2 4732 C11
2747 J3 4733 A13
2748 J4 4734 A13
2755 B8 4791 C13
2756 E3 4792 C13
2757 C2 4793 D13
2758 E13 5701 A3
2759 E13 5702 B3
2760 E13 5703 C1
2761 E14 5704 C1
2762 E14 5705 C3
2763 E14 5706 C2
2764 E14 5707 H2
2765 E14 5708 F2
2766 H4 5709 G2
2767 K8 5710 G2
2770 D1 5711 D10
2771 G4 5713 A14
2772 H4 5715 D9
2773 I4 5716 D11
2774 J11 5717 C12
2776 D6 5718 H4
2785 D9 5720 B6
2786 I11 5798 A4
2788 E11 5799 B4
2790 C14 7701 D2
2792 C11 7702 D3
2795 B3 7704 H2
2796 K6 7708 F13
2797 J12 7709 E4
2798 H4 7713 B2
2799 B4 7714 A10
3702 I11 7715 A12
3703 E4 7716 B6
3704 D8
3705 F4
3706 D6
3707 D3
3708 D2
3709 E3
3710 E3
3711 E2
3714 I2
3716 H2
3717 I2
3718 H4
3719 C2
3720 C2
3721 B2
3722 B2
3725 J4
5728 K1
3730 K3
3731 K4
3732 K4
3733 K1
3739 J11
3740 E3
3741 D3
3744 E3
3745 D3
3746 H12
3747 F2
3748 F2
3749 G2
3754 I2
3755 I2
3757 J2
3759 J2
3790-A B11
3790-B B11
3790-C B11
3790-D C11
3791-A B11
3791-B B11
3791-C B11
3791-D B11
3792-A A11
3792-B A11
3792-C A11
3792-D A11
3793-A G11
3793-B G11
3793-C G11
3793-D G11
3794-A G11
3794-B G11

B4 HOP

B4

Y-SCAVEM CIRCUITRY:

B1÷B6

res only for No HOP

HOP

res only for No HOP

* : RESERVED

CL 16532043_037.eps
190601

0011 I7	3340 B9	7302 A1
1301 G4	3341 C9	7303 G8
1304 H3	3342 C9	7304 G2
2300 I11	3343 D12	7305 B8
2301 B2	3344 D10	7306 A9
2303 E8	3345 D8	7308 H6
2304 G7	3346 C8	7309 G10
2306 H9	3347 D6	7310 F12
2307 F3	3348 D9	7311 G11
A 2308 G8	3350 B10	7312 D10
2309 D3	3351 B9	7313 A11
2310 E3	3352 A9	7314 A10
2311 H5	3353 A11	7315 B11
2313 F8	3354 A11	7317 E10
2314 E1	3355 A7	7318 D9
2315 E2	3358 A12	7324 G6
2317 E3	3359 B9	7340 B12
2318 E3	3360 A7	7375 A8
B 2319 G10	3362 G10	C001 H12
2320 H3	3363 F2	
2321 B3	3364 G11	
2322 B3	3365 G11	
2323 B3	3366 F9	
2324 H6	3367 F9	
2325 G5	3368 F12	
2328 B7	3369 F12	
2329 B6	3373 A8	
2330 A6	3374 A8	
C 2331 B6	3375 E12	
2332 E2	3386 G12	
2333 D10	3387 G1	
2334 E8	3388 F11	
2335 H6	3389 D10	
2336 E8	3390 D9	
2338 G11	3391 G12	
2339 E11	3392 E10	
2340 I12	3394 D8	
D 2341 E1	3395 C3	
2342 A7	3396 D2	
2343 A9	3397 D2	
2347 I2	3398 D2	
2348 I2	3399 B12	
2349 I2	3453 C2	
2363 F3	3454 B1	
2395 D3	3455 C1	
2396 D2	3458 F2	
E 2397 D3	3459 B12	
2398 I10	3465 B9	
2399 A2	3467 B8	
2426 H2	3469 D11	
2427 H2	3470 E11	
2428 I2	3472 E10	
2429 A4	4302 A3	
3300 H11	4303 A3	
3301 A9	4304 A3	
F 3302 C3	4305 A4	
3304 H12	4307 B9	
3305 C2	4308 B4	
3306 E8	4309 B4	
3307 E9	4310 B4	
3308 E9	4311 I9	
3309 E11	4312 I9	
3310 E8	4313 G13	
3311 G7	4369 F13	
3312 F12	5301 E2	
G 3313 A7	5302 E2	
3314 G7	5303 H10	
3315 G8	5304 H2	
3316 H9	5305 H2	
3317 G9	5306 I2	
3318 F8	5307 I2	
3319 A7	5308 I2	
3320 D2	5309 I2	
3321 D2	6303 H8	
H 3322 D12	6304 H9	
3323 H5	6306 I5	
3324 I4	6307 I5	
3325 G5	6308 C2	
3326 G5	6309 D11	
3327 G5	6310 D10	
3328 F8	6311 D12	
3329 E1	6312 G7	
3330 G9	6313 H8	
3331 G3	6314 H9	
I 3332 B7	6315 I6	
3333 G3	6316 I6	
3334 H4	6317 E12	
3335 G6	6318 E11	
3336 G5	6319 D8	
3337 H5	6321 C8	
3338 H6	6334 H4	
3339 C3	7301 B3	

All Models (7621) - SSB Module Schematic, (5 of 6)

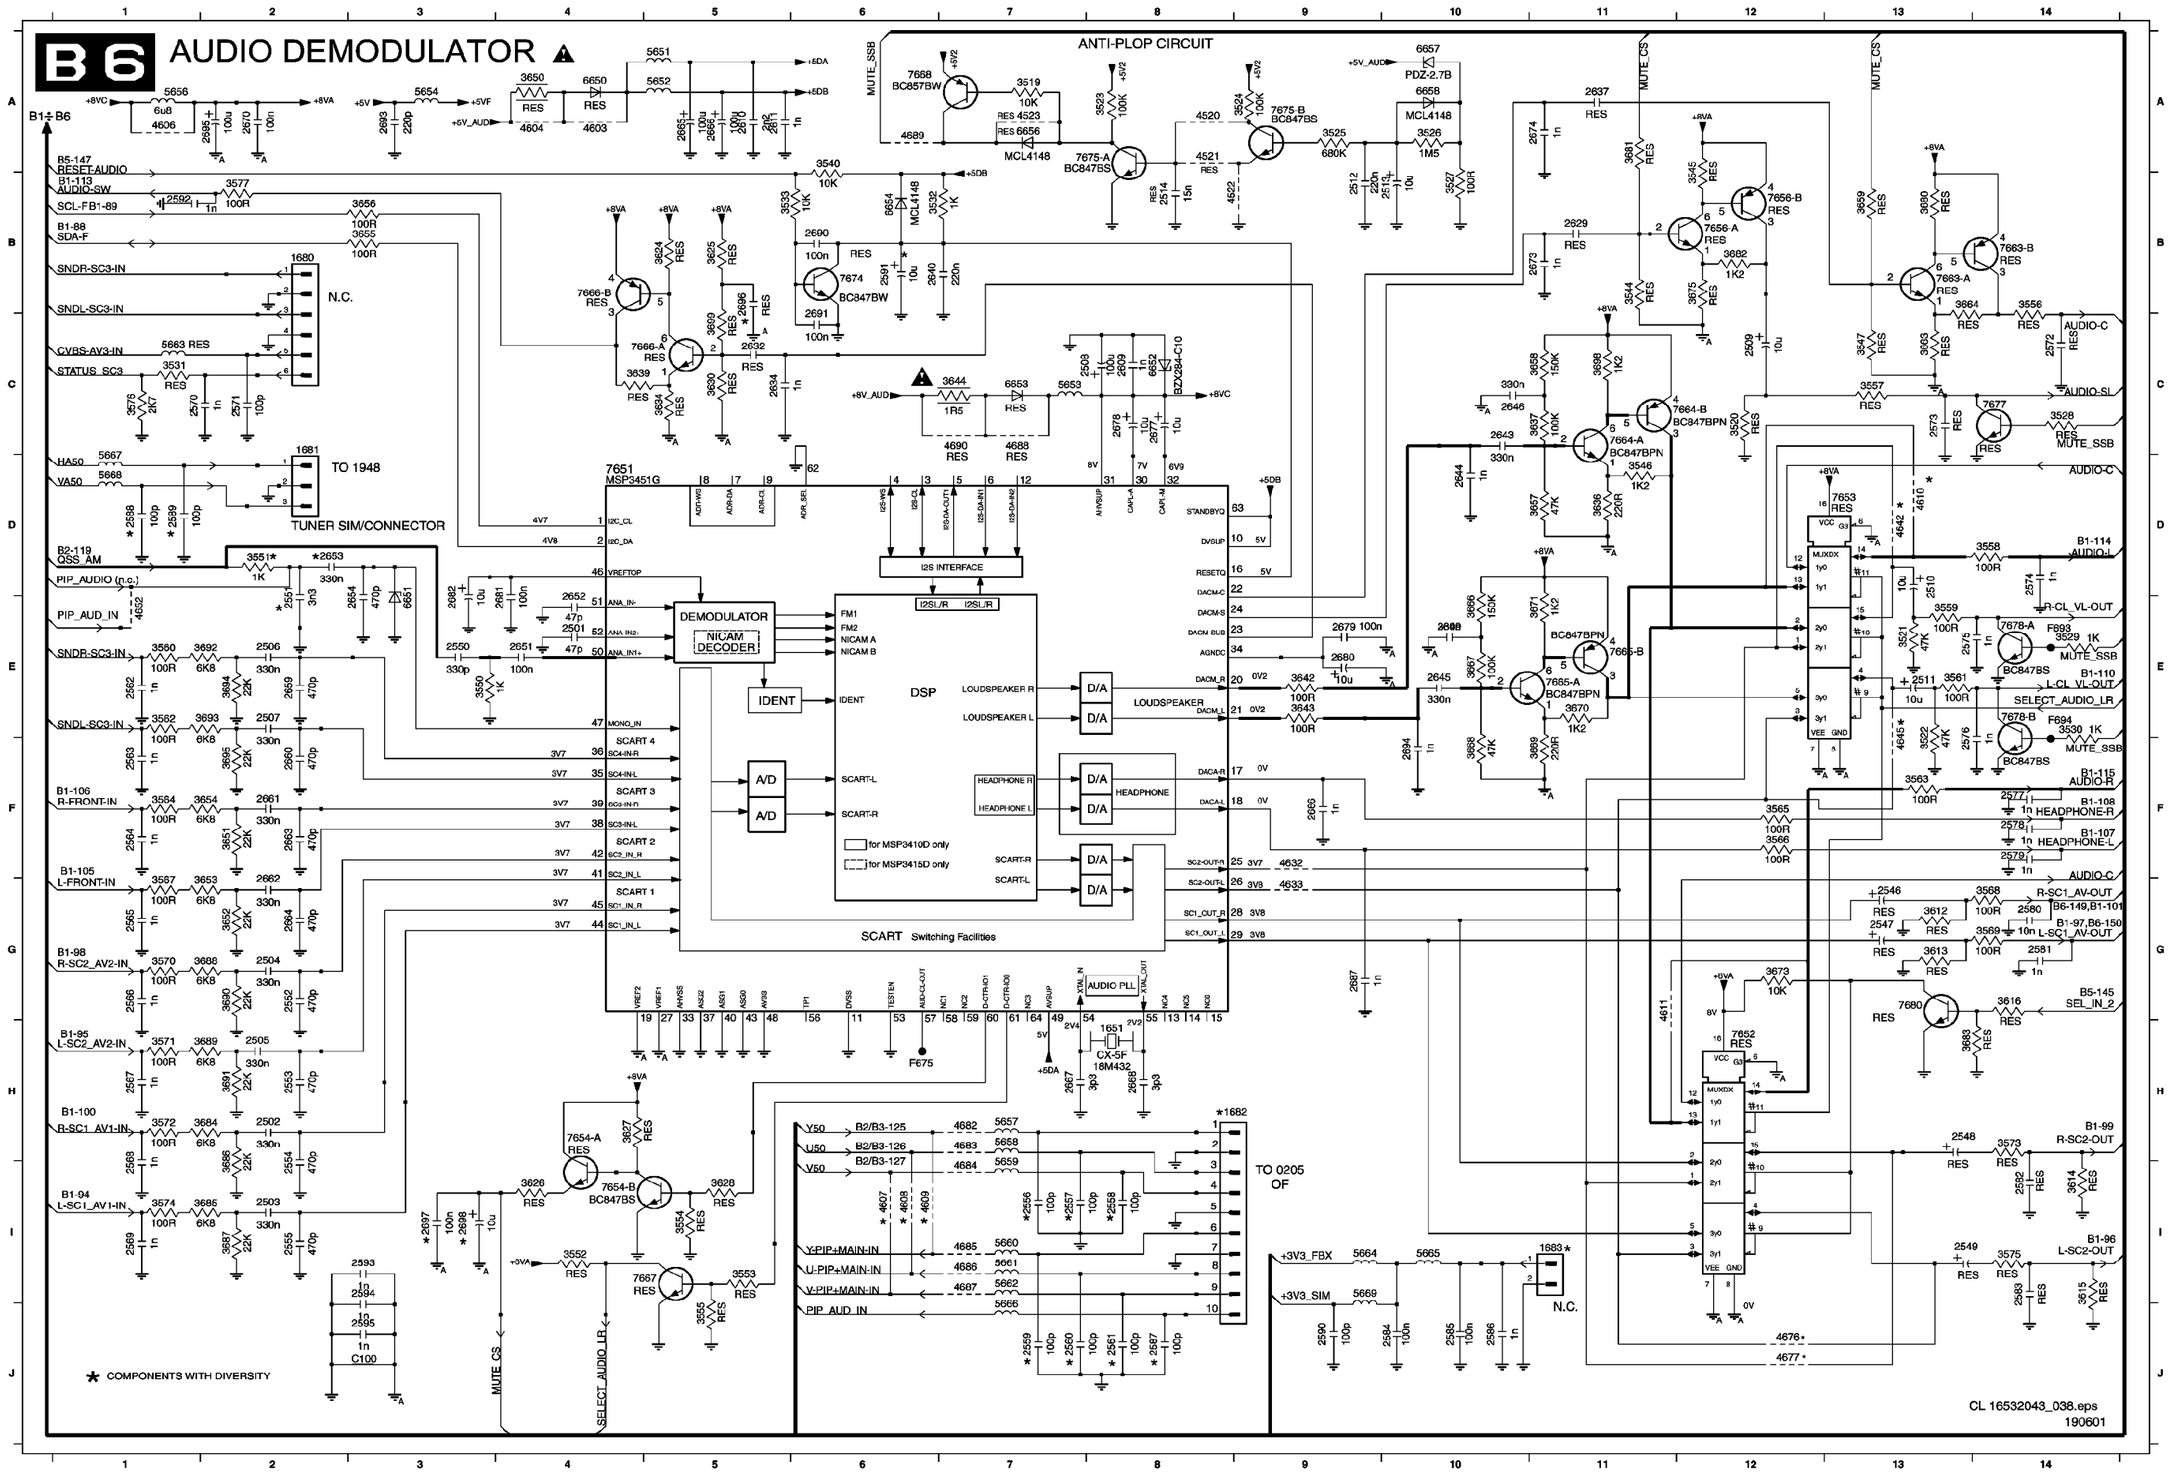

B7 PAINTER

B7

Painter - Processor

+5V2_CON
3054 RES 1003
T 315mA
7005 MC33269D
IN NC OUT GND-ADJ
2013 100u
8003 MCL4148
2014 100n
2015 100n
2016 100u
+3V3_INTPAINTER
BC857B 7002
3013 10K
3014 4K7
3015 470K
7003 BC847BW
7004 BC847BW
3017 4K7
RESET
2017 100n
3016 1K
3072 22R 3073 22R
7009 MC33269D
+5V_PA
3070 1R5 3071 1R5
2027 100n
2028 100n
+3V3_PA
0012 MECHPART
B1: B6

+3V3_INTPAINTER
3061 10K
3074 10K
CEN
WC_NVM
SOUND-ENABLE B1-93
3049 470R
ATT-SWITCH / BCL B4-120
STANDBY-INFO
STANDBY
4007
KEYBOARD B1-117
SAM-SDM 4006
3060 2K7
2020 10n
3048 470R
3012 2K2
3039 470R
7001 SAA5667HL
FRONT-DETECT B1-102
3040 470R
A(14)
RDN
WRN
STANDBY-INFO B4-146
3042 10K
3041 470R
3019 470R
3020 470R RES
A(7)
SEL_IN_1 B6-144
3043 470R
P50_OUT
DEGAUSSING B1-118
3044 470R
3059 4K7
3050 470R
P50_IN
A(6)
ON-OFF-LED B1-116
CVBS-TXT B2-122
3045 470R
2031 100n
To Mapping D13
SDA-S SDA-F SCL-S SCL-F
4002 RES
4003 RES
D(7) D(6) D(5) D(4) D(3) D(2) D(1) D(0)
I2C DATA
I/P SERIAL DATA
I/P MODE SELECT
I/P CLOCK
3030 4K7
3031 4K7
3032 4K7
3033 4K7
3026 220R
3028 220R
3029 220R
3027 220R
B1/B4-92
7013 PDTC144EU
3021 22K
2003 10n
3065 10K
3058 470R
3035 470R
3052 6K8
3053 10K
2009 470p
B1-121
+5V2_CON
+3V3_INTPAINTER
2006 100n
2007 100n
7011 CY7C1019V33
VCC CE_ WE_ OE
CEN WRN RDN
A(14) A(7) A(4) A(13) A(8) A(9) A(10) A(11) A(16) A(0) A(1) A(2) A(3) A(12) A(15) A(5) A(6)
D(7) D(5) D(2) D(0) D(1) D(3) D(4) D(6)
FROM mapping A8
GND
2030 100n
1001
2001 33p
2002 33p
RESET
A(8) A(9) A(10) A(11)
2004 100n
VS B6-145
3034 470R
SEL_IN_2
HS B4-137
3006 1K
3007 1K5
FBL-TXT
A(16)
R-TXT B4-124
G-TXT B4-135
B-TXT B4-135
3062 100R
3063 100R
3064 100R
3018 24K
2008 100n
2005 100n
3003 150R
3004 150R
3005 150R
2010 47p
2011 47p
2012 47p
3066 100R
3067 100R
3068 100R
3069 100R
2023 10p
2024 10p
2025 10p
3076 100R
3077 100R
2032 10p
2033 10p
1002
2026 10p
NC
PTV-FTV ONLY

NVM
7012 M24C32
VSS VCC SDA SCL WC_ E2 E1 E0
SDA_NVM
WC_NVM
SCL_NVM
3001 4K7
3002 4K7
3000 4K7

+3V3_INTPAINTER
3008 10K
7006 PMBT2369
RES 4004
3056 47K
VS
VSYNC B4-142
3057 47K
3011 10K
HS
7007 PMBT2369
RES 4005
3009 47K
3010 47K
HFB B3-131
P50_OUT
3022 1K RES
RES 2022 220n
7010 BC847BW RES
3023 220R RES
RES 6001 1PS76SB10
P50_IN
RES BC847B 7008
RES 3025 10K
RES 6002 1PS76SB10
3024 2K2 RES
+5V2_CON

CL 16532043_039.eps
270601

0012 H1
1001 C10
1002 H9
1003 B1
2001 D10
2002 D10
2003 B9
2004 D10
2005 G8
2006 B13
2007 B13
2008 G7
2009 B10
2010 G9
2011 G9
2012 G10
2013 B1
2014 B1
2015 B2
2016 B3
2017 D2
2020 C6
2022 G5
2023 G10
2024 G10
2025 G11
2026 H10
2027 F1
2028 F2
2030 C9
2031 F5
2032 G7
2033 H7
3001 G13
3002 G13
3003 G8
3004 G8
3005 G9
3006 E10
3007 F10
3008 G3
3009 H3
3010 H3
3011 G3
3012 C6
3013 C2
3014 C2
3015 D1
3016 D2
3017 C3
3018 F7
3019 D5
3020 D6
3021 B9
3022 G5
3023 G5
3024 G6
3025 G6
3026 B8
3027 B9
3028 B8
3029 B8
3030 B9
3031 B9
3032 B9
3033 B9
3034 E10
3035 B10
3039 C6
3040 D6
3041 D6
3042 D5
3043 E5
3044 E5
3045 F6
3048 C6
3049 B6
3050 E6
3051 F8
3052 B11
3053 B11
3054 B1
3056 G4
3057 G4
3058 B10
3059 E5
3060 C5
3061 A7
3062 F9
3063 G9
3064 G9
3065 B10
3066 G10
3067 G10
3068 G10
3069 G11
3070 E1
3071 F1
3072 E2
3073 E2
3074 B7
3076 G7
3077 H7
7001 C7
7002 C1
7003 D2
7004 D3
7005 B2
7006 G3
7007 H3
7008 G6
7009 E2
7010 G5
7011 B13
7012 F12
7013 B9

1 RED CRT PANEL

To HOP Panel
1210
EH-S

1211 N/U
TMPJ02X-A1

To LSP Panel
1202
EH-S
EH-B
1212

1201
VH

7201
TDA6120Q
VCC
VDD
IIN
MIRROR 4X
MIRROR 1X
CASCODE
CURRENT INPUT
OUTC
OUT
OUTM
VIN+
VIN-
RC-
RC+
NC
GND

7200
BF570

7202
BF570

1203
HPS0521

1204
SLV

1205
DSP

1206
DSP

1207
EH-S

1208
RT-01T

1209
DSP

1217
EH-B

BAS216
6204
BAS21
6201
BYD33M
6200

0001
HEATSINK

Anode

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ✱ FOR VALUE SEE TABLE.

3135 013 32673 01

1 GREEN CRT PANEL

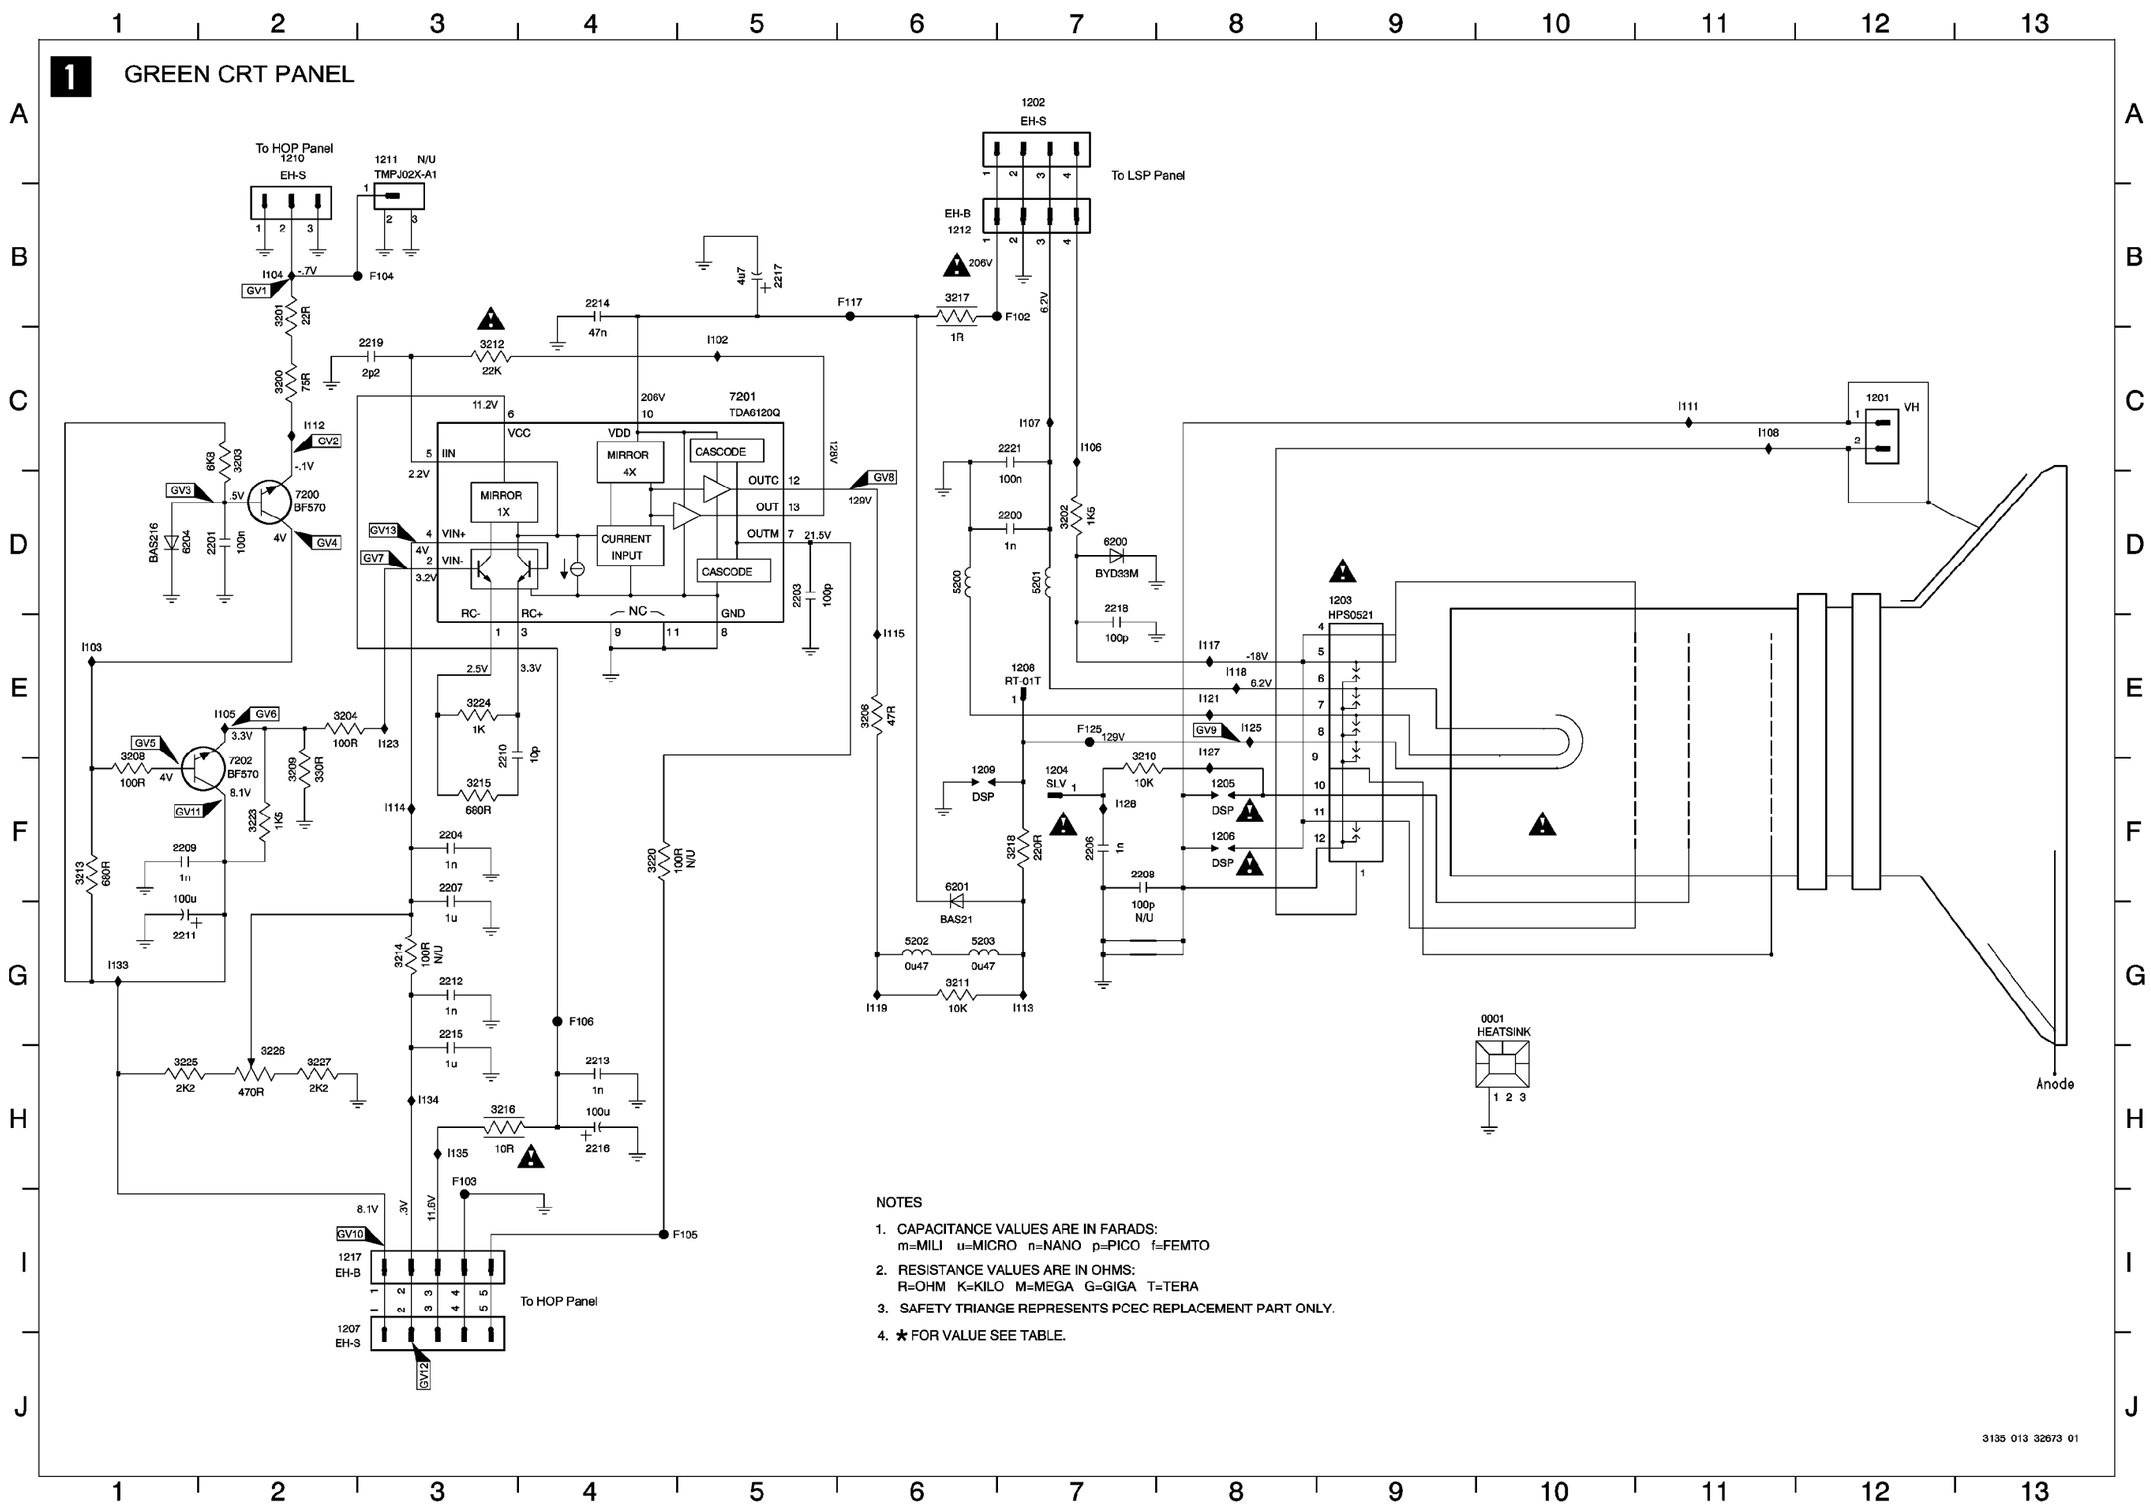

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ✱ FOR VALUE SEE TABLE.

3135 013 32673 01

1 BLUE CRT PANEL

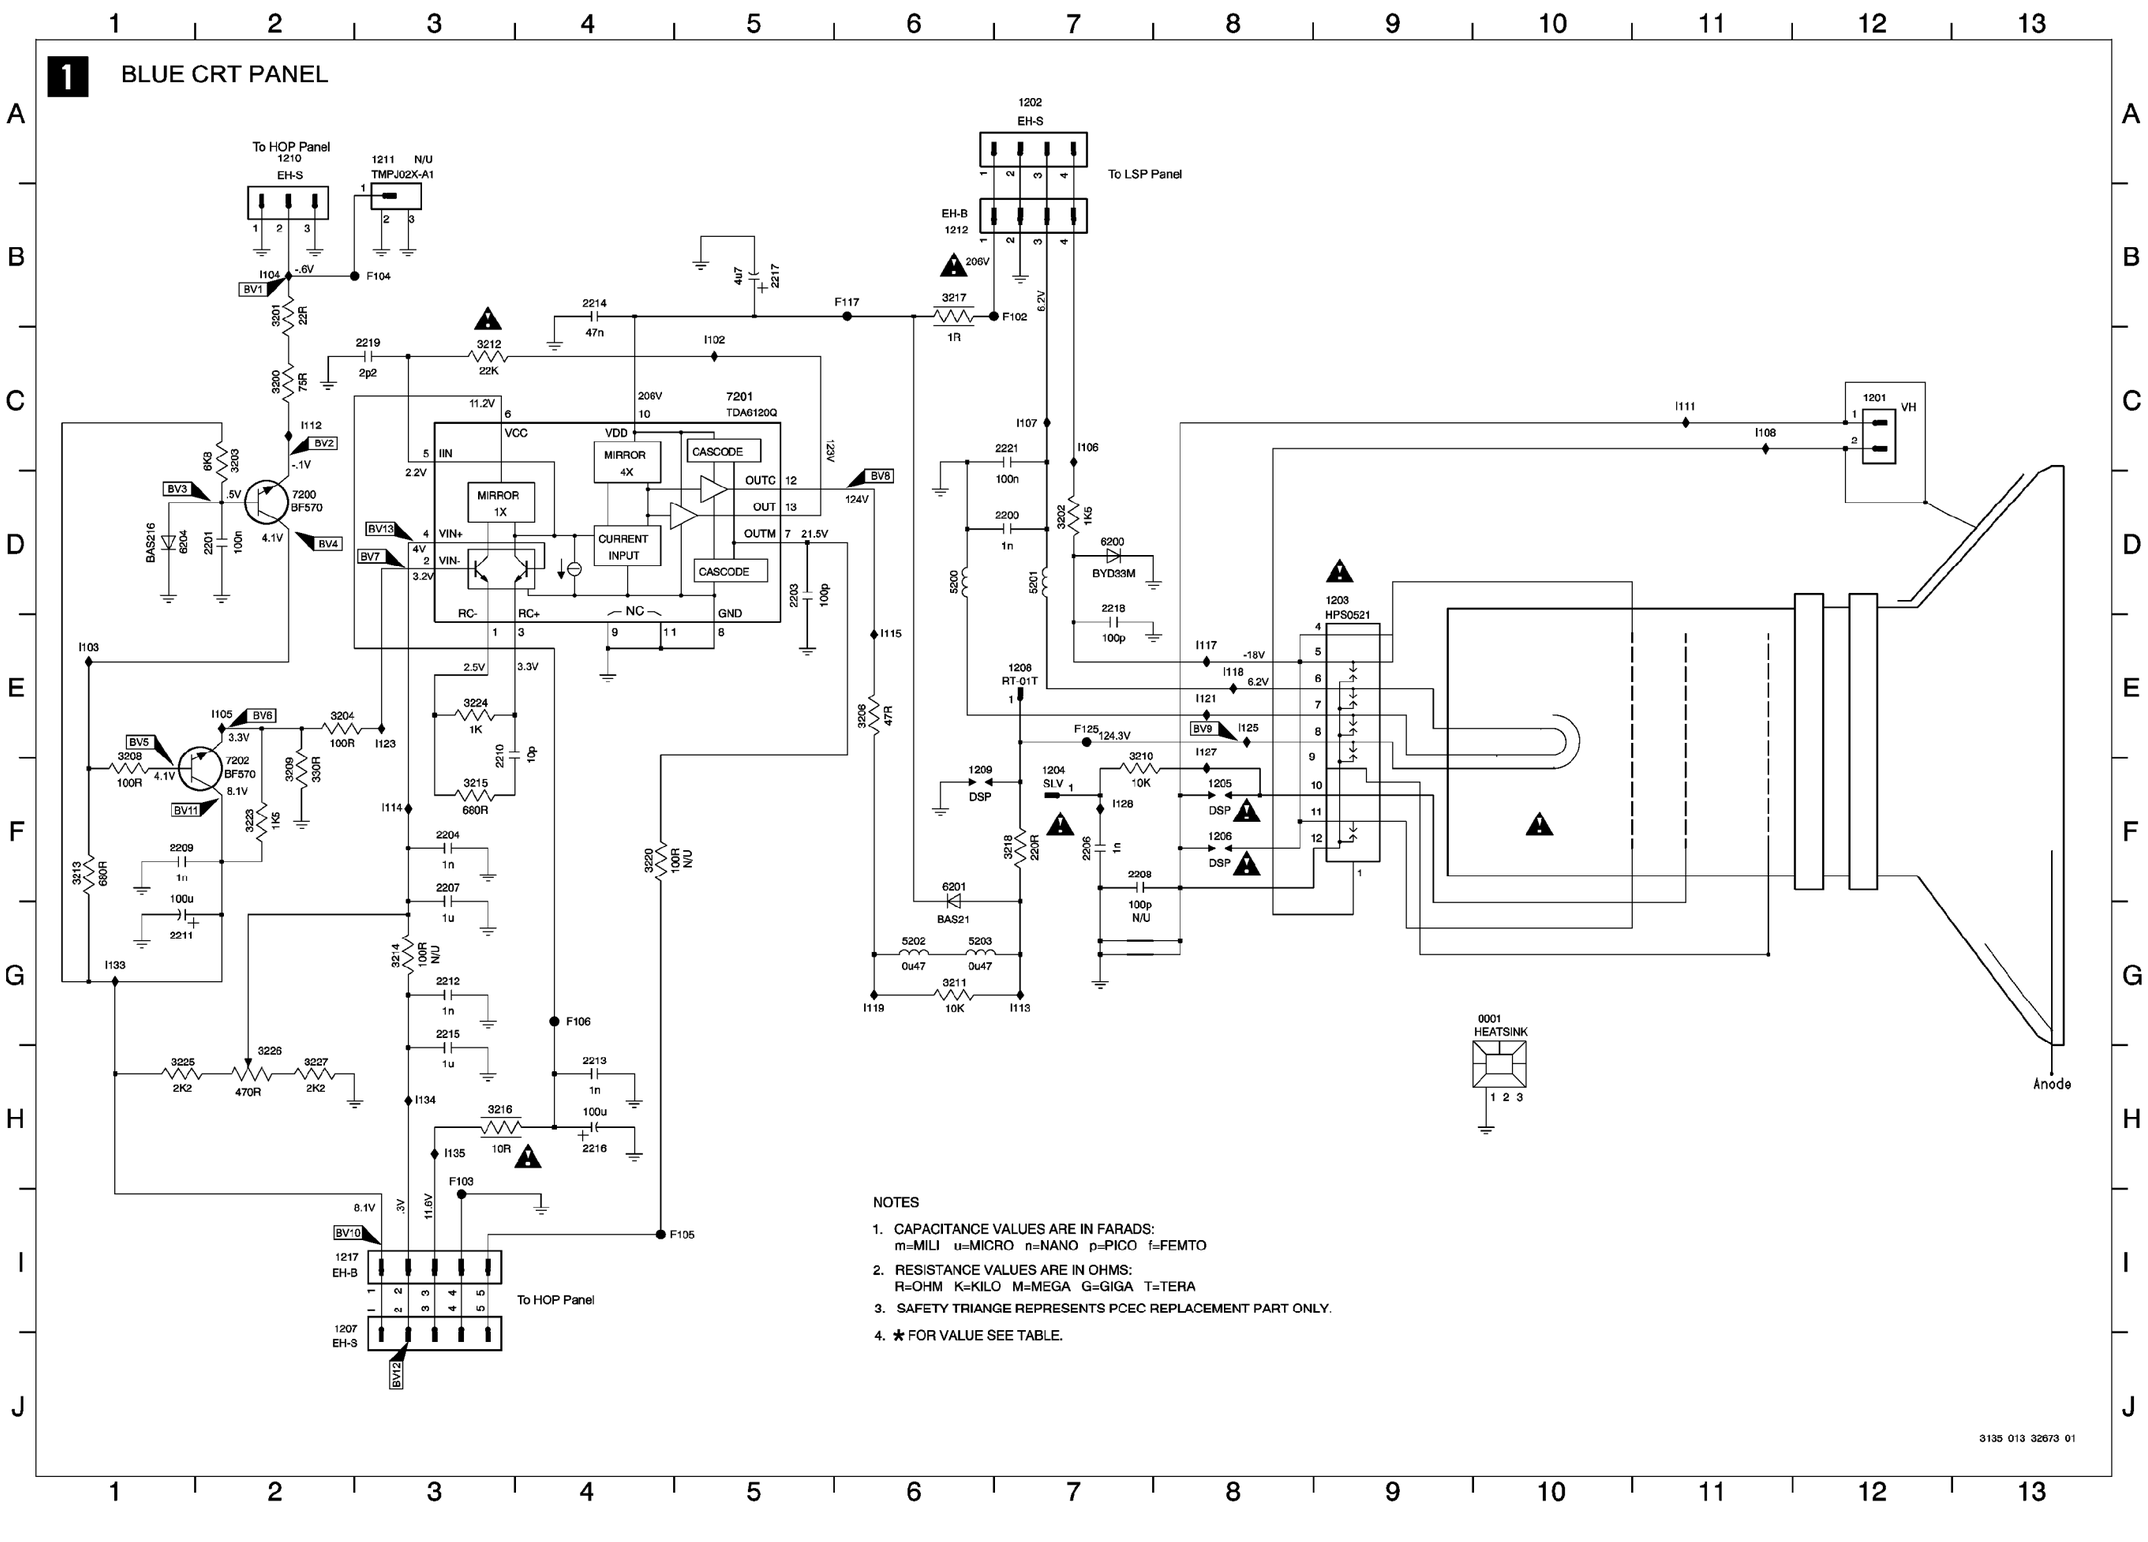

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ★ FOR VALUE SEE TABLE.

3135 013 32673 01

1 AUTO CONVERGENCE (1 of 3)

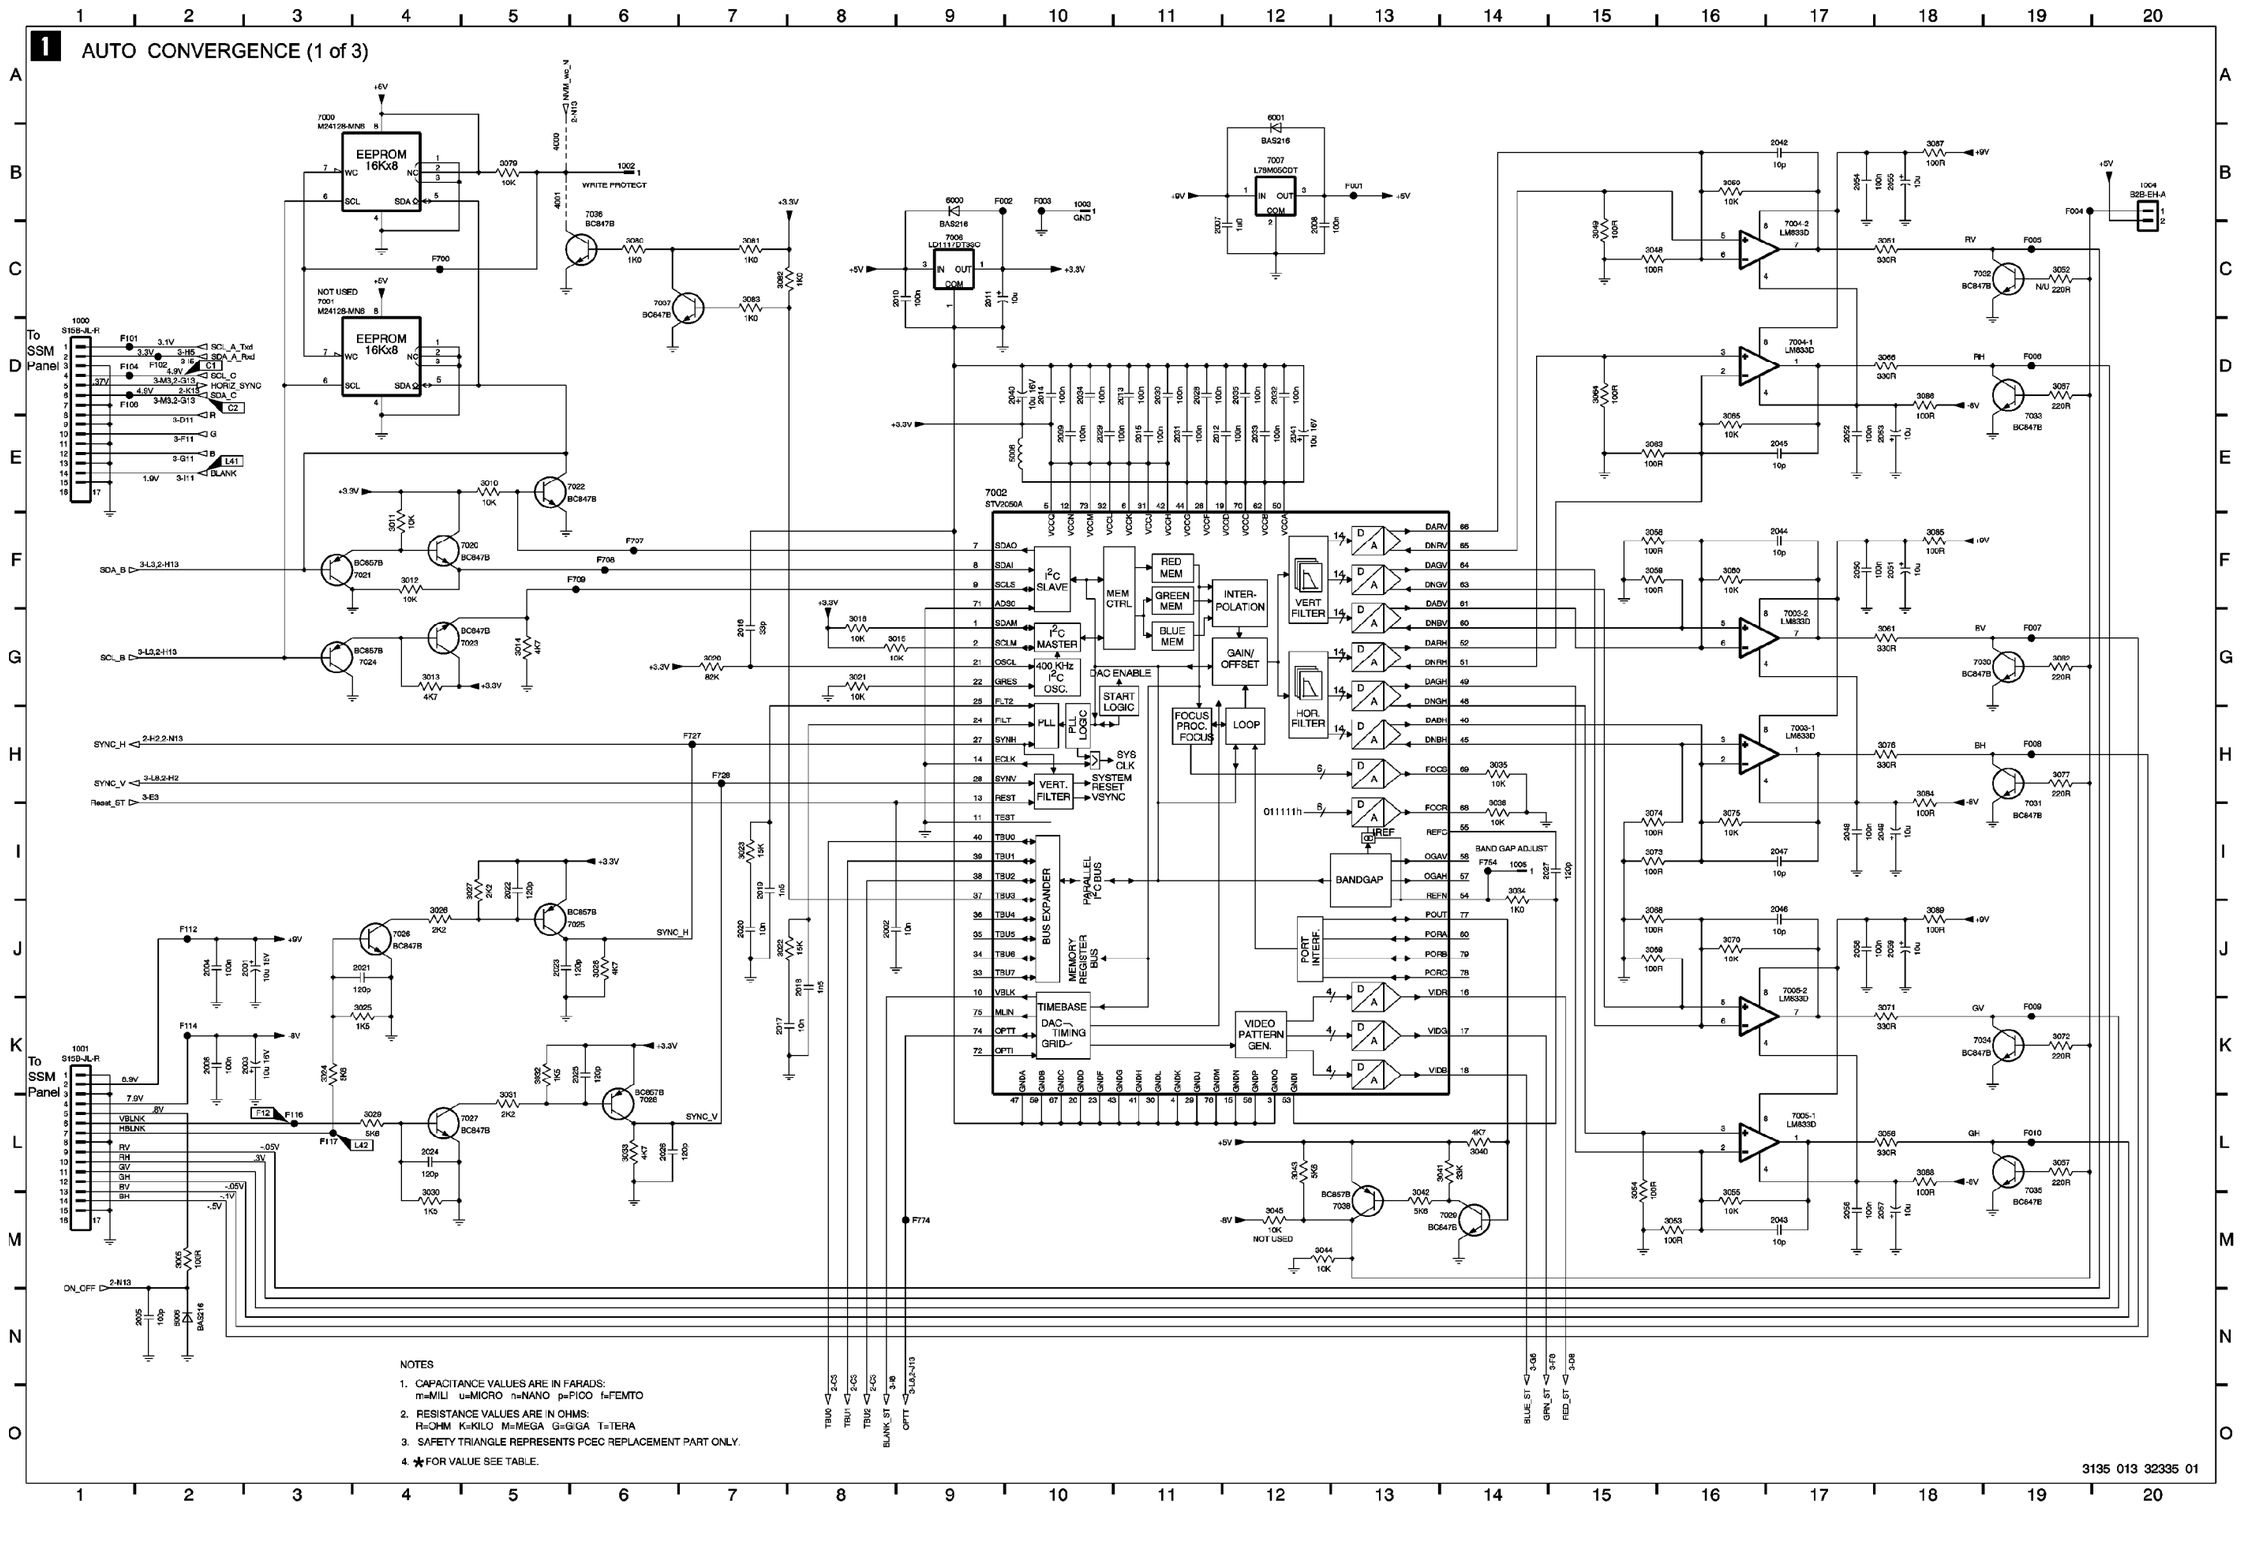

2 AUTO CONVERGENCE (2 of 3)

SENSOR MUX

INPUT FROM SENSOR

SAMPLE & HOLD

IR

KEYBOARD

3135 013 32335 01

3

AUTO CONVERGENCE (3 of 3)

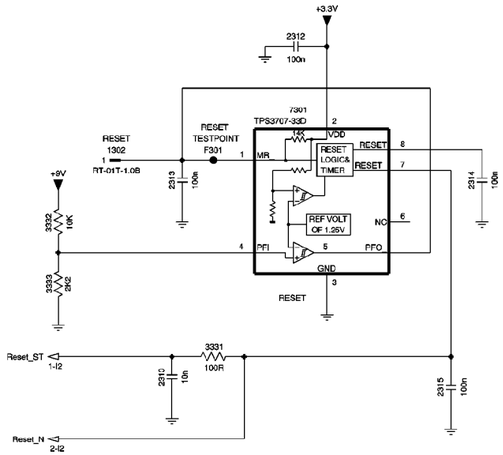

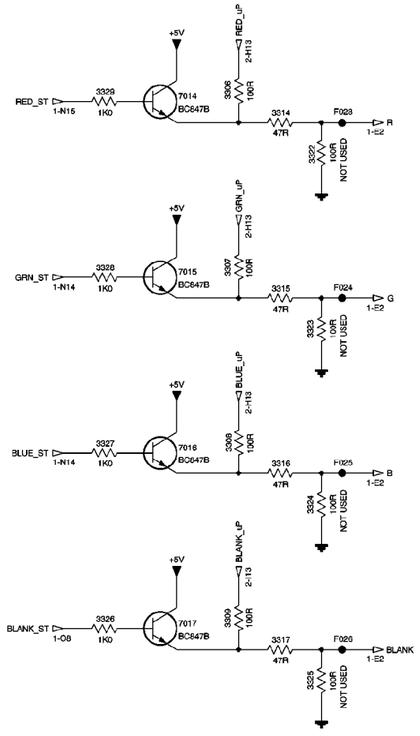

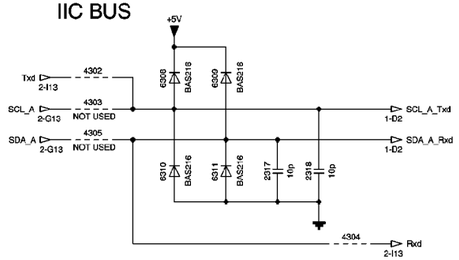



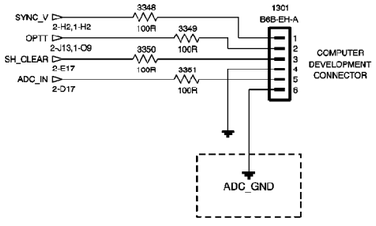

	2K3 NAFTA Auto	2K3 NAFTA Manual	AP Auto	AP Manual	Korea Auto	NAFTA Auto	NAFTA Manual	NOT USED
3135_037_10241_01							X	
3135_037_10251_01						X		
3135_037_10531_01				X				
3135_037_10641_01			X					
3135_037_11381_01		X						
3135_037_11391_01	X							
3135_037_11531_01					X			
RESERVED								X

SHEET 1

Ref Des	3135_037_10241_01	3135_037_10251_01	3135_037_10531_01	3135_037_10541_01	3135_037_11381_01	3135_037_11391_01	3135_037_11531_01	HS-24-HV41
3048	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	3199021310 100K
7000	9322117406 EEPROM M24128-MN6 180x8	9322117406 EEPROM M24128-MN6 180x8	9322156506 EEPROM M24128-MN6 180x8	9322156506 EEPROM M24128-MN6 180x8	9322117406 EEPROM M24128-MN6 180x8	9322117406 EEPROM M24128-MN6 180x8	9322156506 EEPROM M24128-MN6 180x8	9322117406 EEPROM M24128-MN6 180x8
7001	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	9322117406 EEPROM M24128-MN6 180x8

SHEET 2

Ref Des	3135_037_10241_01	3135_037_10251_01	3135_037_10531_01	3135_037_10541_01	3135_037_11381_01	3135_037_11391_01	3135_037_11531_01	RESERVED
1010	NOT USED	9420R2512479 B4B-EH-A	NOT USED	9420R2512479 B4B-EH-A	NOT USED	9420R2512479 B4B-EH-A	9420R2512479 B4B-EH-A	NOT USED
1011	NOT USED	9420R3512481 B5B-EH-A	NOT USED	9420R3512481 B5B-EH-A	NOT USED	9420R3512481 B5B-EH-A	9420R3512481 B5B-EH-A	NOT USED
2200	NOT USED	31992321040 100n	NOT USED	31992321040 100n	NOT USED	31992321040 100n	31992321040 100n	NOT USED
2201	NOT USED	31992321040 100n	NOT USED	31992321040 100n	NOT USED	31992321040 100n	31992321040 100n	NOT USED
2210	NOT USED	31992321040 100n	NOT USED	31992321040 100n	NOT USED	31992321040 100n	31992321040 100n	NOT USED
2211	NOT USED	31992041090 10u 16V	NOT USED	31992041090 10u 16V	NOT USED	31992041090 10u 16V	31992041090 10u 16V	NOT USED
2250	NOT USED	31992173320 3n3	NOT USED	31992173320 3n3	NOT USED	31992173320 3n3	31992173320 3n3	NOT USED
2251	NOT USED	31992041010 100u 16V	NOT USED	31992041010 100u 16V	NOT USED	31992041010 100u 16V	31992041010 100u 16V	NOT USED
2252	NOT USED	31992041010 100u 16V	NOT USED	31992041010 100u 16V	NOT USED	31992041010 100u 16V	31992041010 100u 16V	NOT USED
2253	NOT USED	31992172470 470n	NOT USED	31992172470 470n	NOT USED	31992172470 470n	31992172470 470n	NOT USED
2279	NOT USED	31992041090 10u	NOT USED	31992041090 10u	NOT USED	31992041090 10u	31992041090 10u	NOT USED
2280	NOT USED	31992321040 100n	NOT USED	31992321040 100n	NOT USED	31992321040 100n	31992321040 100n	NOT USED
2281	NOT USED	31992321040 100n	NOT USED	31992321040 100n	NOT USED	31992321040 100n	31992321040 100n	NOT USED
3208	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992153320 33K
3209	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992153320 33K
3241	NOT USED	31992151020 1K0	NOT USED	31992151020 1K0	NOT USED	31992151020 1K0	31992151020 1K0	NOT USED
3242	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3243	NOT USED	31992151020 1K0	NOT USED	31992151020 1K0	NOT USED	31992151020 1K0	31992151020 1K0	NOT USED
3282	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
3291	NOT USED	31992153330 33K	NOT USED	31992153330 33K	NOT USED	31992153330 33K	31992153330 33K	NOT USED
3292	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
3293	NOT USED	31992151020 1K0	NOT USED	31992151020 1K0	NOT USED	31992151020 1K0	31992151020 1K0	NOT USED
3294	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
3295	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
3296	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
3297	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
3298	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3299	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3400	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3401	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3405	NOT USED	31992151510 150R	NOT USED	31992151510 150R	NOT USED	31992151510 150R	31992151510 150R	NOT USED
3418	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
3419	NOT USED	31992151010 100R	NOT USED	31992151010 100R	NOT USED	31992151010 100R	31992151010 100R	NOT USED
6208	NOT USED	93405530116 BAS216	NOT USED	93405530116 BAS216	NOT USED	93405530116 BAS216	93405530116 BAS216	NOT USED
6209	NOT USED	93405530116 BAS216	NOT USED	93405530116 BAS216	NOT USED	93405530116 BAS216	93405530116 BAS216	NOT USED
6230	NOT USED	93405530116 BAS216	NOT USED	93405530116 BAS216	NOT USED	93405530116 BAS216	93405530116 BAS216	NOT USED
6231	NOT USED	93409610115 BZX284-C5V1	NOT USED	93409610115 BZX284-C5V1	NOT USED	93409610115 BZX284-C5V1	93409610115 BZX284-C5V1	NOT USED
6405	NOT USED	93409610115 BZX284-C5V1	NOT USED	93409610115 BZX284-C5V1	NOT USED	93409610115 BZX284-C5V1	93409610115 BZX284-C5V1	NOT USED
7101	NOT USED	93221307668 TL/D831CD	NOT USED	93221307668 TL/D831CD	NOT USED	93221307668 TL/D831CD	93221307668 TL/D831CD	NOT USED
7140-1	NOT USED	93221094668 TL074C	NOT USED	93221094668 TL074C	NOT USED	93221094668 TL074C	93221094668 TL074C	NOT USED
7140-2	NOT USED	93221094668 TL074C	NOT USED	93221094668 TL074C	NOT USED	93221094668 TL074C	93221094668 TL074C	NOT USED
7140-3	NOT USED	93221094668 TL074C	NOT USED	93221094668 TL074C	NOT USED	93221094668 TL074C	93221094668 TL074C	NOT USED
7141	NOT USED	93371530118 74HCT4051 MDX	NOT USED	93371530118 74HCT4051 MDX	NOT USED	93371530118 74HCT4051 MDX	93371530118 74HCT4051 MDX	NOT USED
7540	NOT USED	31991042030 BC847B	NOT USED	31991042030 BC847B	NOT USED	31991042030 BC847B	31991042030 BC847B	NOT USED

SHEET 3

Ref Des	3135_037_10241_01	3135_037_10251_01	3135_037_10531_01	3135_037_10541_01	3135_037_11381_01	3135_037_11391_01	3135_037_11531_01	RESERVED
3223	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3273	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3324	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
3325	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992151010 100R
4300	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992180020
4301	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992180020
4303	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992180020
4305	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	31992180020

3135 013 32335 01

USED ONLY IN MODELS: 55PP950201, 55PP950217, 55PP950201, 55PP950217, 60PP9502/17, 60PP950201, 60PP9502/17, 60PP950201, 55PP9502/84, 55PP9502/84 (7621) - Solar Cell Panel Schematic
55PW9383/17F, 55RW9515/35, 55PW9383/17F, 55RW9515/35, 60PP938317F, 60PW938317F, 60PP938317F, 60PW938317F

SOLAR CELL

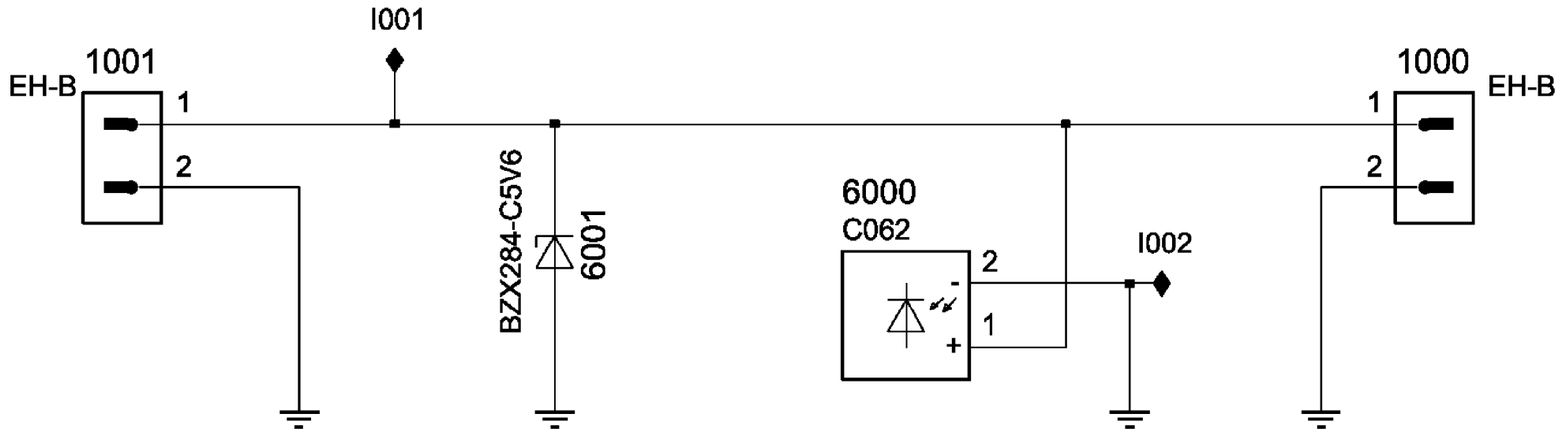

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * FOR VALUE SEE TABLE.

CBA Layout (Top View)

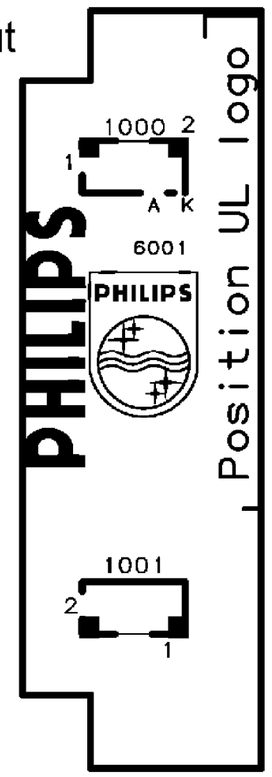

CBA Layout (Bottom View)

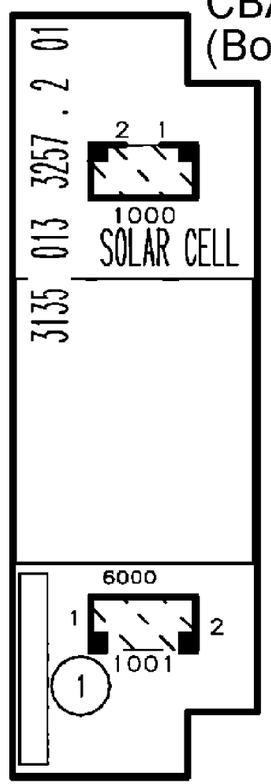

3135 013 32571 03

NOT USED IN MODELS: , 51MP392H/17, 51MP3964H/17 (7621) - Side Jack Panel Schematic

1 Side Jack Panel

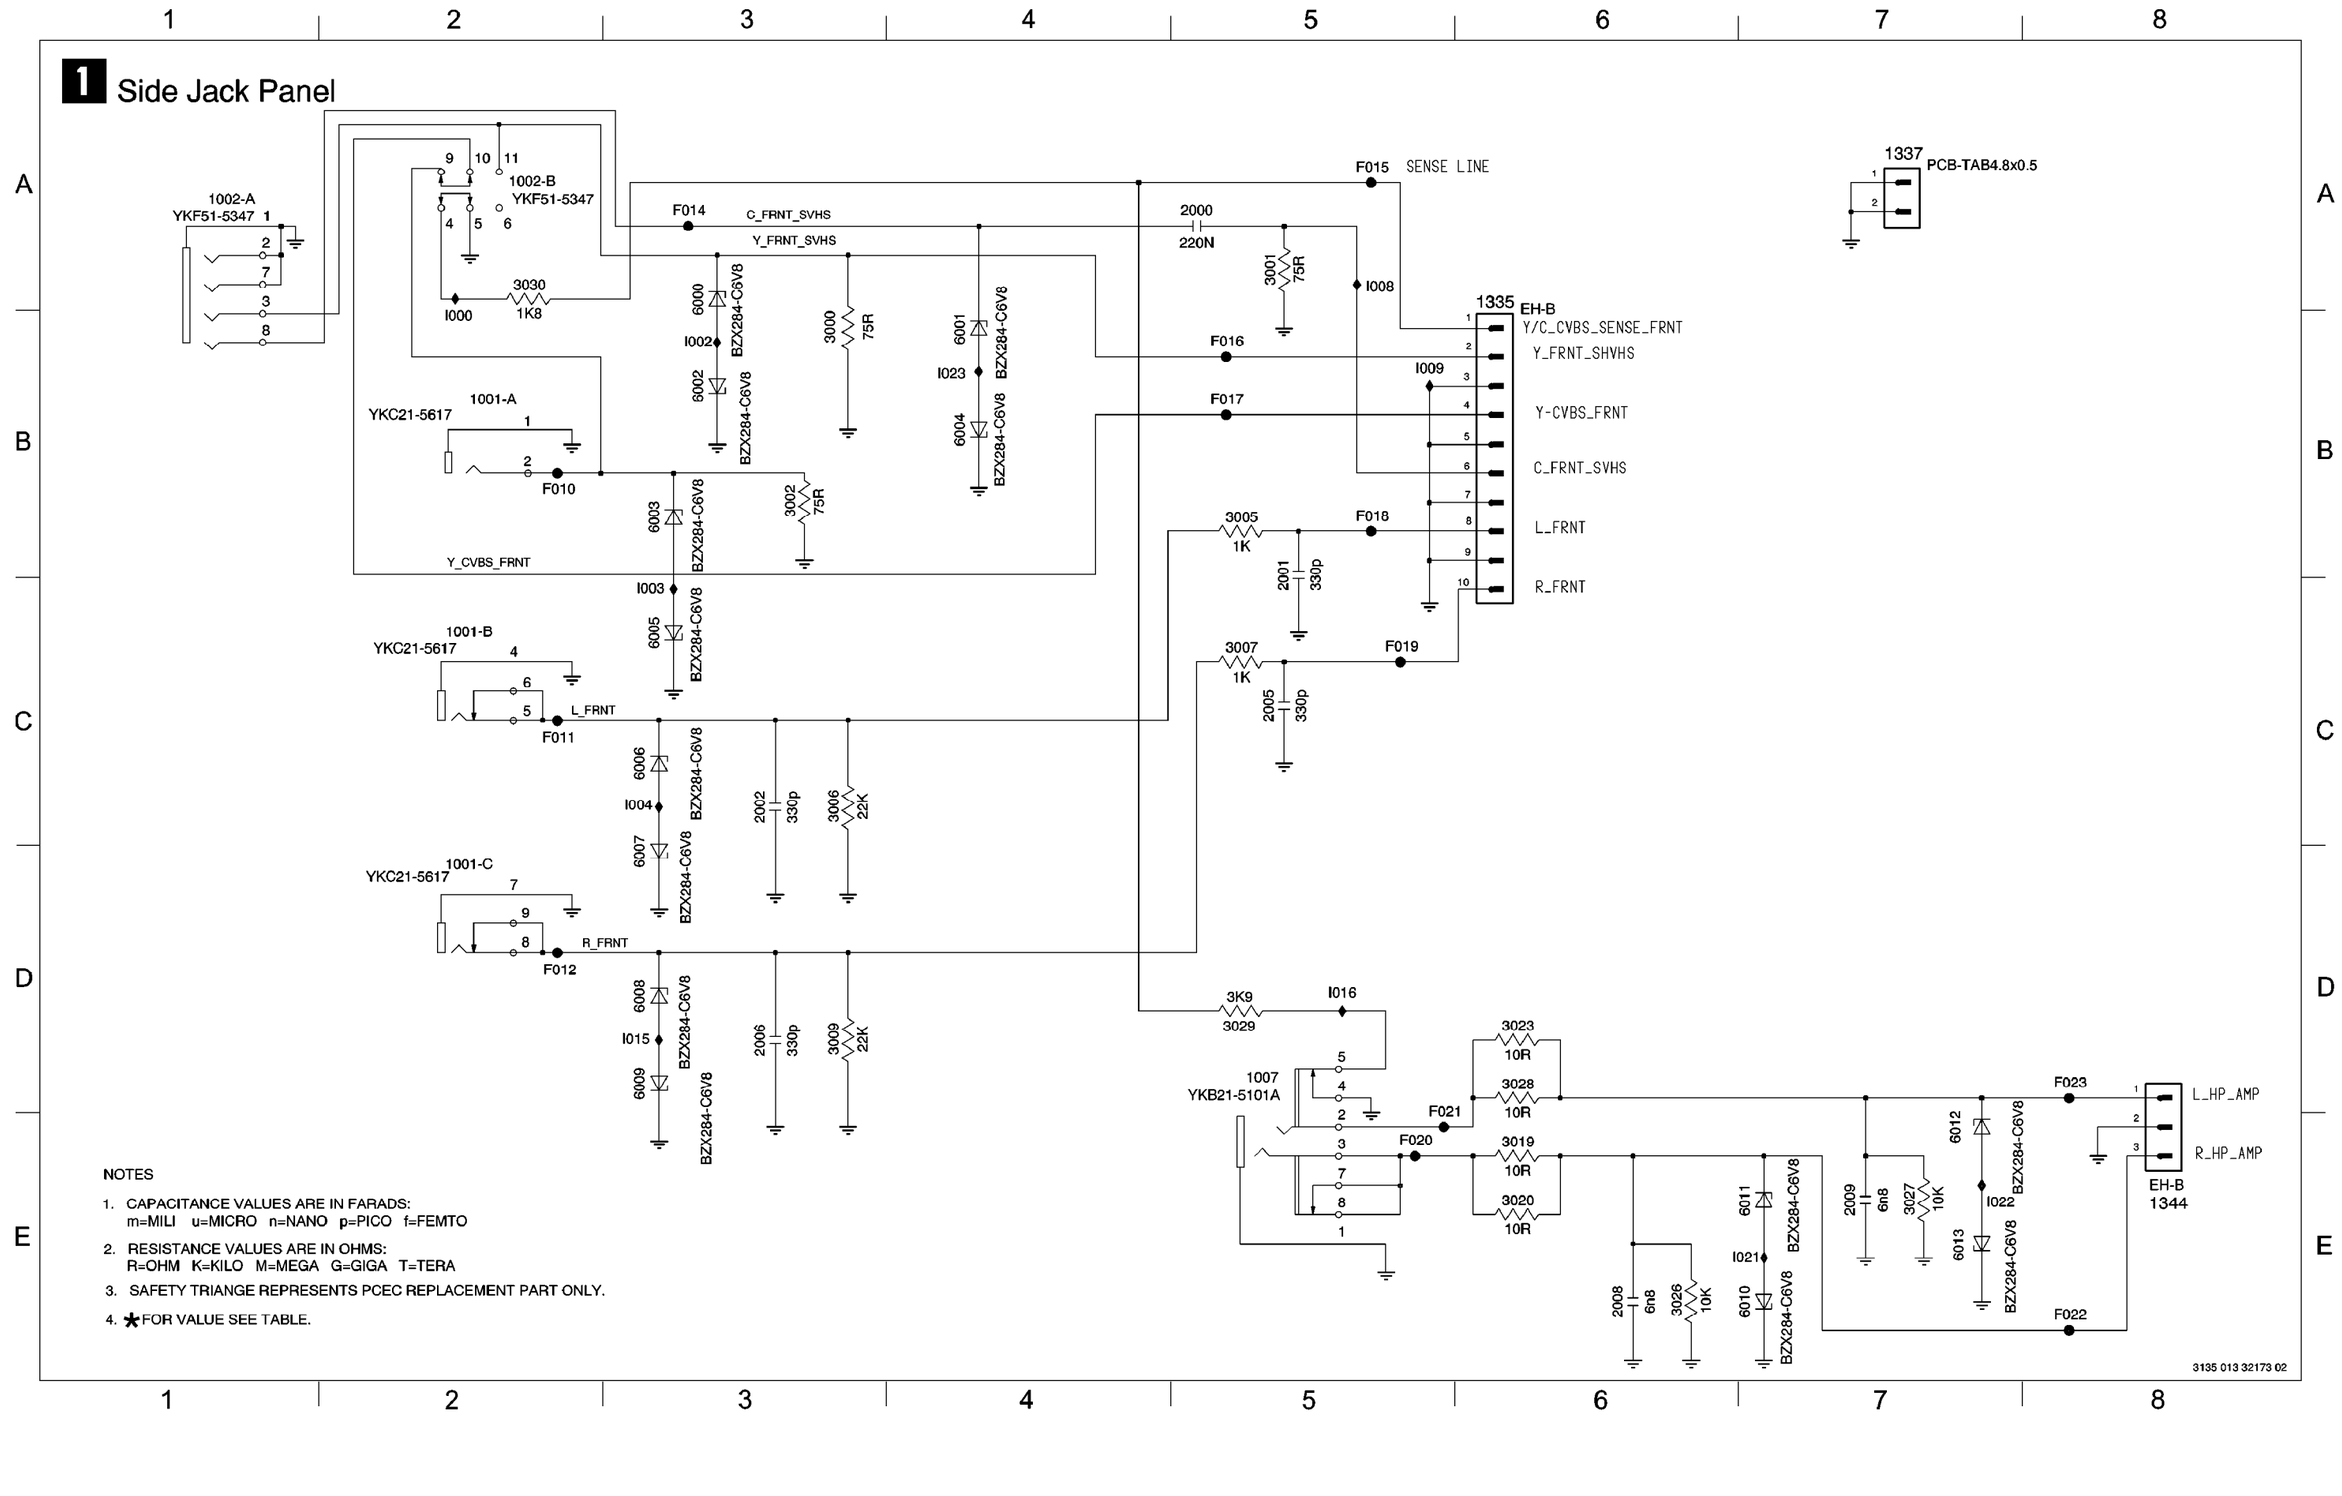

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ✱ FOR VALUE SEE TABLE.

3135 013 32173 02

USED ONLY IN MODELS: 51MP392H/17, 51MP3964H/17 (7621) - Side Jack Panel Schematic

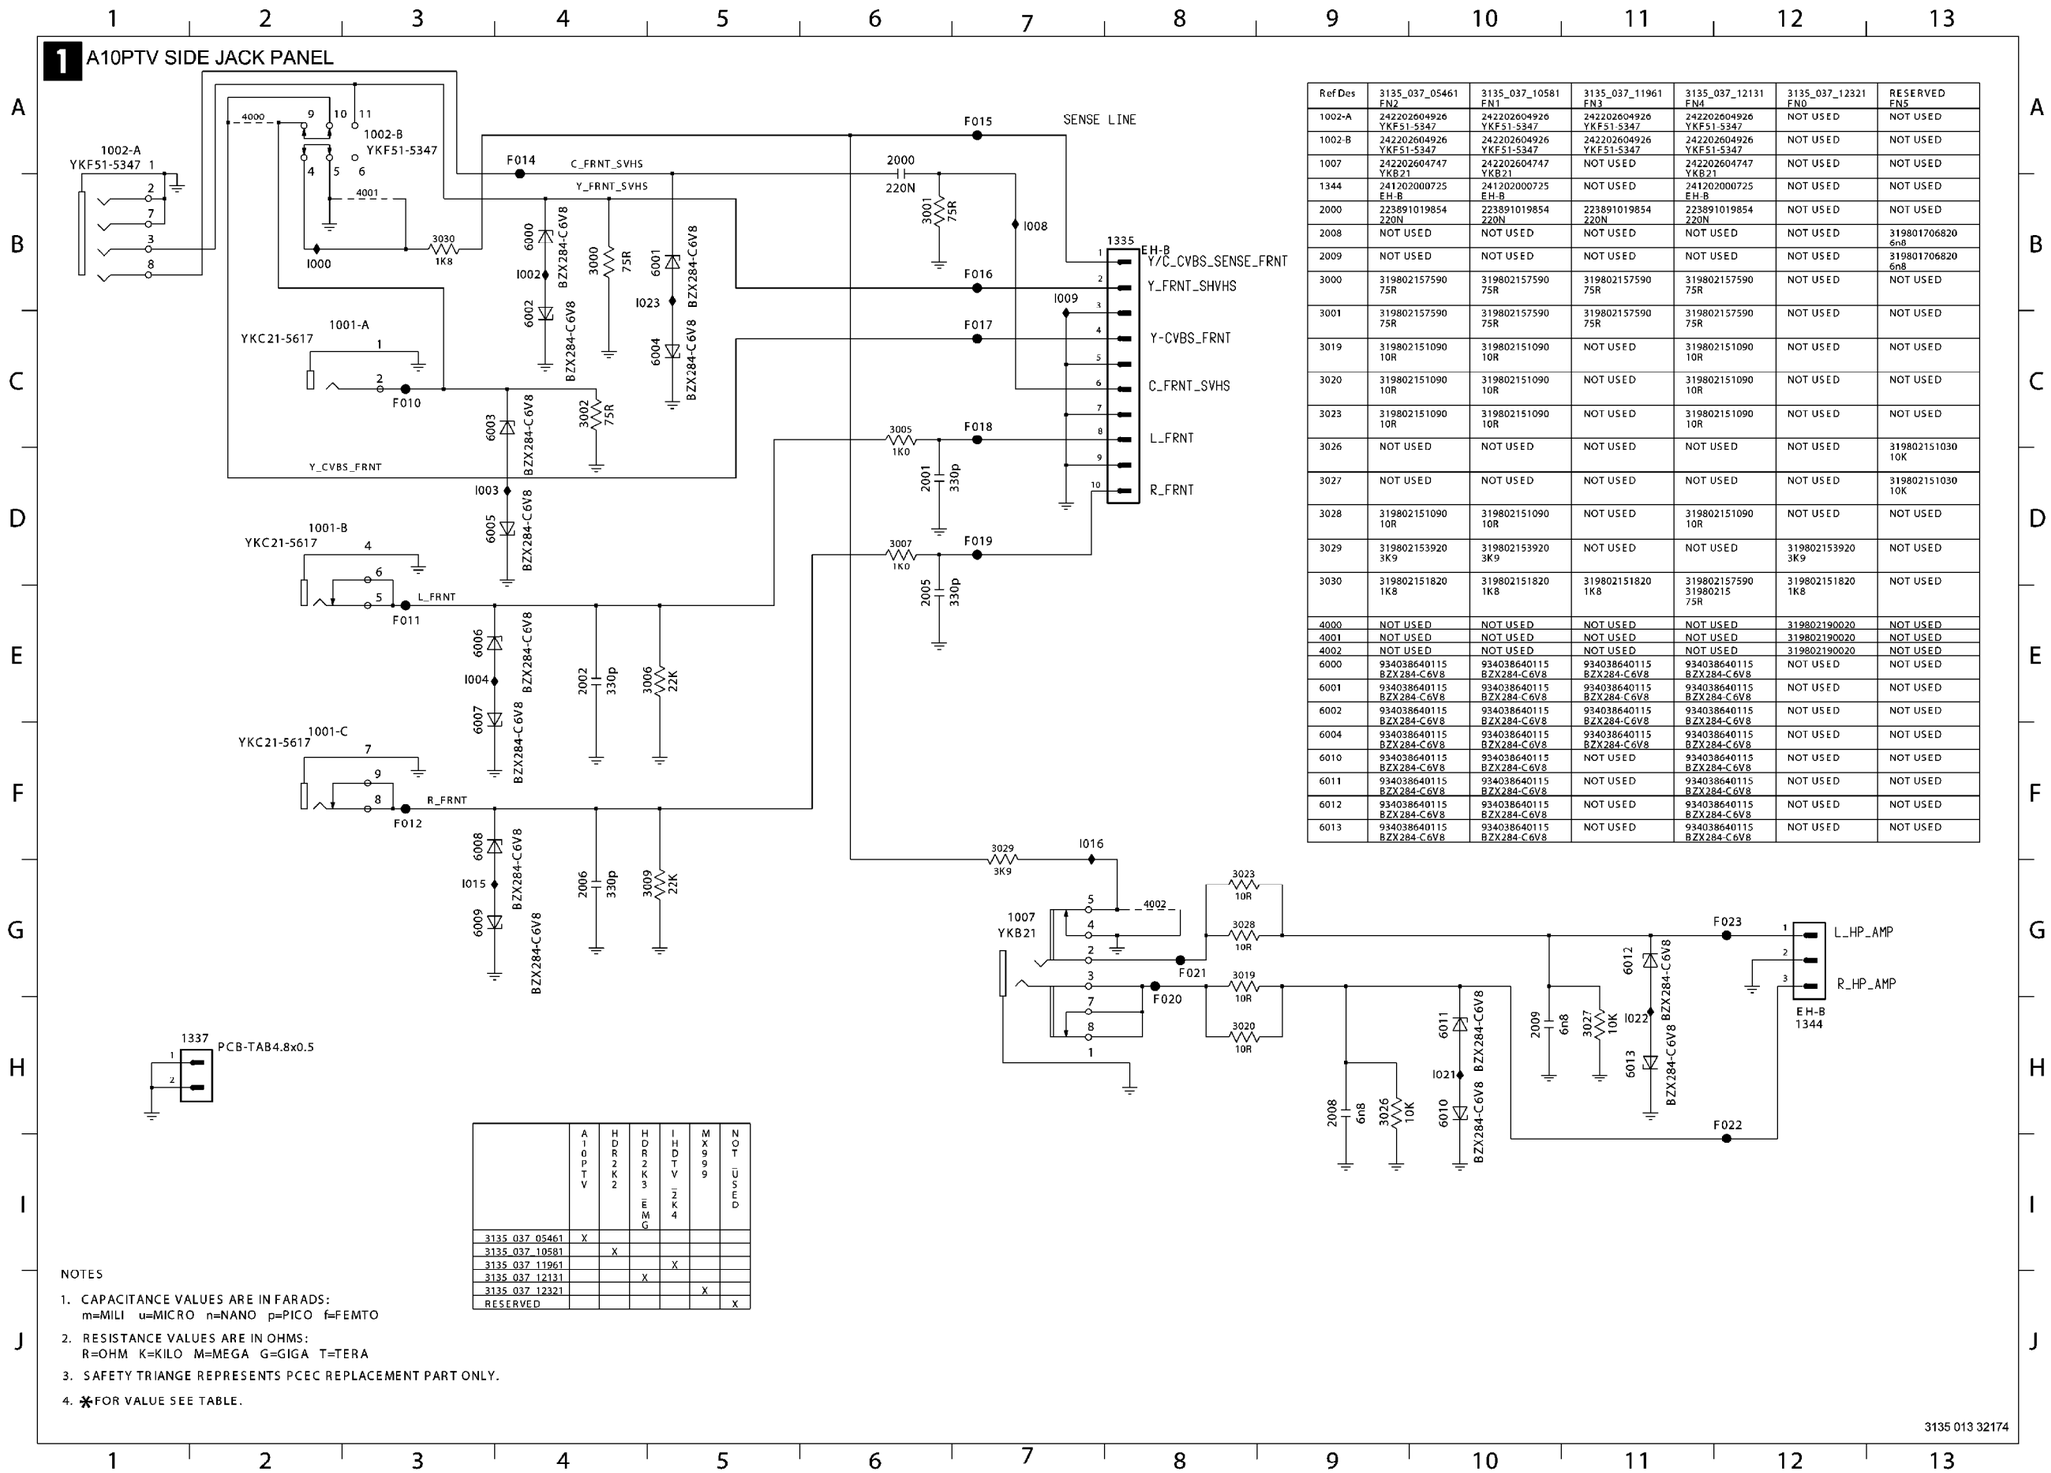

Ref Des	3135_037_05461 FN2	3135_037_10581 FN1	3135_037_11961 FN3	3135_037_12131 FN4	3135_037_12321 FN0	RESERVED FN5
1002-A	242202604926 YKF51-5347	242202604926 YKF51-5347	242202604926 YKF51-5347	242202604926 YKF51-5347	NOT USED	NOT USED
1002-B	242202604926 YKF51-5347	242202604926 YKF51-5347	242202604926 YKF51-5347	242202604926 YKF51-5347	NOT USED	NOT USED
1007	242202604747 YKB21	242202604747 YKB21	NOT USED	242202604747 YKB21	NOT USED	NOT USED
1344	241202000725 EH-B	241202000725 EH-B	NOT USED	241202000725 EH-B	NOT USED	NOT USED
2000	223891019854 220N	223891019854 220N	223891019854 220N	223891019854 220N	NOT USED	NOT USED
2008	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	319801706820 6n8
2009	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	319801706820 6n8
3000	319802157590 75R	319802157590 75R	319802157590 75R	319802157590 75R	NOT USED	NOT USED
3001	319802157590 75R	319802157590 75R	319802157590 75R	319802157590 75R	NOT USED	NOT USED
3019	319802151090 10R	319802151090 10R	NOT USED	319802151090 10R	NOT USED	NOT USED
3020	319802151090 10R	319802151090 10R	NOT USED	319802151090 10R	NOT USED	NOT USED
3023	319802151090 10R	319802151090 10R	NOT USED	319802151090 10R	NOT USED	NOT USED
3026	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	319802151030 10K
3027	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	319802151030 10K
3028	319802151090 10R	319802151090 10R	NOT USED	319802151090 10R	NOT USED	NOT USED
3029	319802153920 3K9	319802153920 3K9	NOT USED	NOT USED	319802153920 3K9	NOT USED
3030	319802151820 1K8	319802151820 1K8	319802151820 1K8	319802157590 31980215 75R	319802151820 1K8	NOT USED
4000	NOT USED	NOT USED	NOT USED	NOT USED	319802190020	NOT USED
4001	NOT USED	NOT USED	NOT USED	NOT USED	319802190020	NOT USED
4002	NOT USED	NOT USED	NOT USED	NOT USED	319802190020	NOT USED
6000	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	NOT USED
6001	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	NOT USED
6002	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	NOT USED
6004	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	NOT USED
6010	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	934038640115 BZX284-C6V8	NOT USED	NOT USED
6011	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	934038640115 BZX284-C6V8	NOT USED	NOT USED
6012	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	934038640115 BZX284-C6V8	NOT USED	NOT USED
6013	934038640115 BZX284-C6V8	934038640115 BZX284-C6V8	NOT USED	934038640115 BZX284-C6V8	NOT USED	NOT USED

	A10PTV	HDR2K2	HDR2K3_EMG	IHDTV_2K4	MX9999	NOT USED
3135_037_05461	X					
3135_037_10581		X				
3135_037_11961				X		
3135_037_12131			X			
3135_037_12321					X	
RESERVED						X

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. *FOR VALUE SEE TABLE.

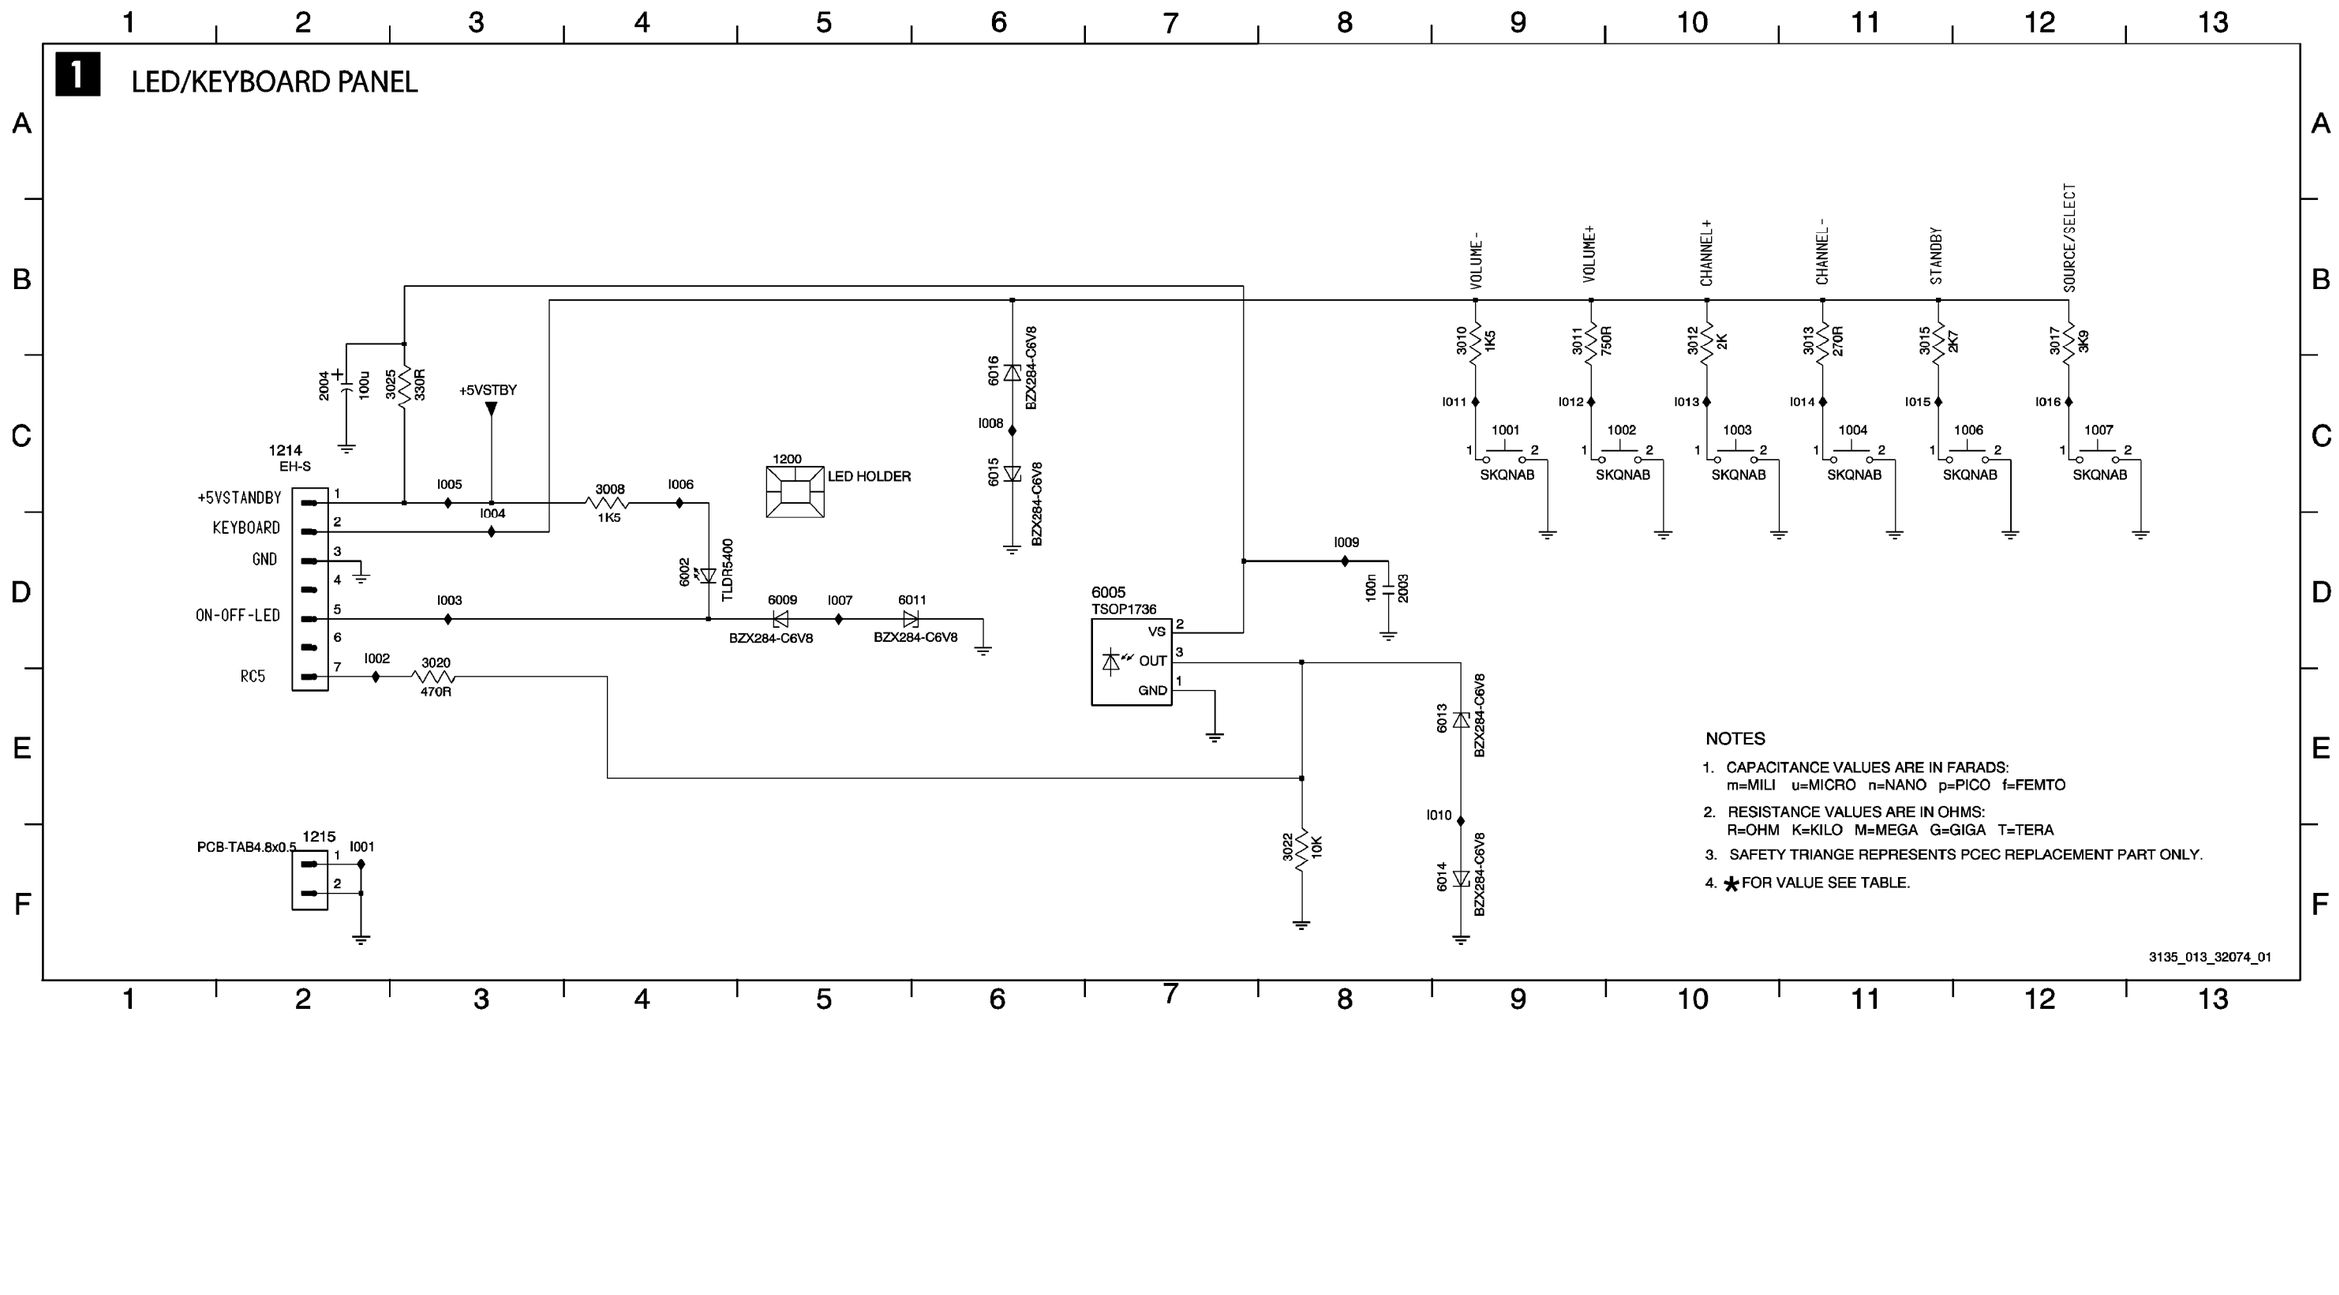
1 LED/KEYBOARD PANEL
1214
EH-S
+5VSTANDBY
KEYBOARD
GND
ON-OFF-LED
RC5
2004
100u
3025
330R
+5VSTBY
I005
I004
3008
1K5
I006
1200
LED HOLDER
6002
TLDR5400
I003
6009
BZX284-C6V8
I007
6011
BZX284-C6V8
I002
3020
470R
1215
PCB-TAB4.8x0.5
I001
6016
BZX284-C6V8
I008
6015
BZX284-C6V8
I009
6005
TSOP1736
VS
OUT
GND
100n
2003
3022
10K
VOLUME-
VOLUME+
CHANNEL+
CHANNEL-
STANDBY
SOURCE/SELECT
3010
1K5
3011
750R
3012
2K
3013
270R
3015
2K7
3017
3K9
I011
I012
I013
I014
I015
I016
1001
1002
1003
1004
1006
1007
SKQNAB
6013
BZX284-C6V8
I010
6014
BZX284-C6V8
NOTES
1. CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * FOR VALUE SEE TABLE.
3135_013_32074_01

L 1 2ND FRONT END

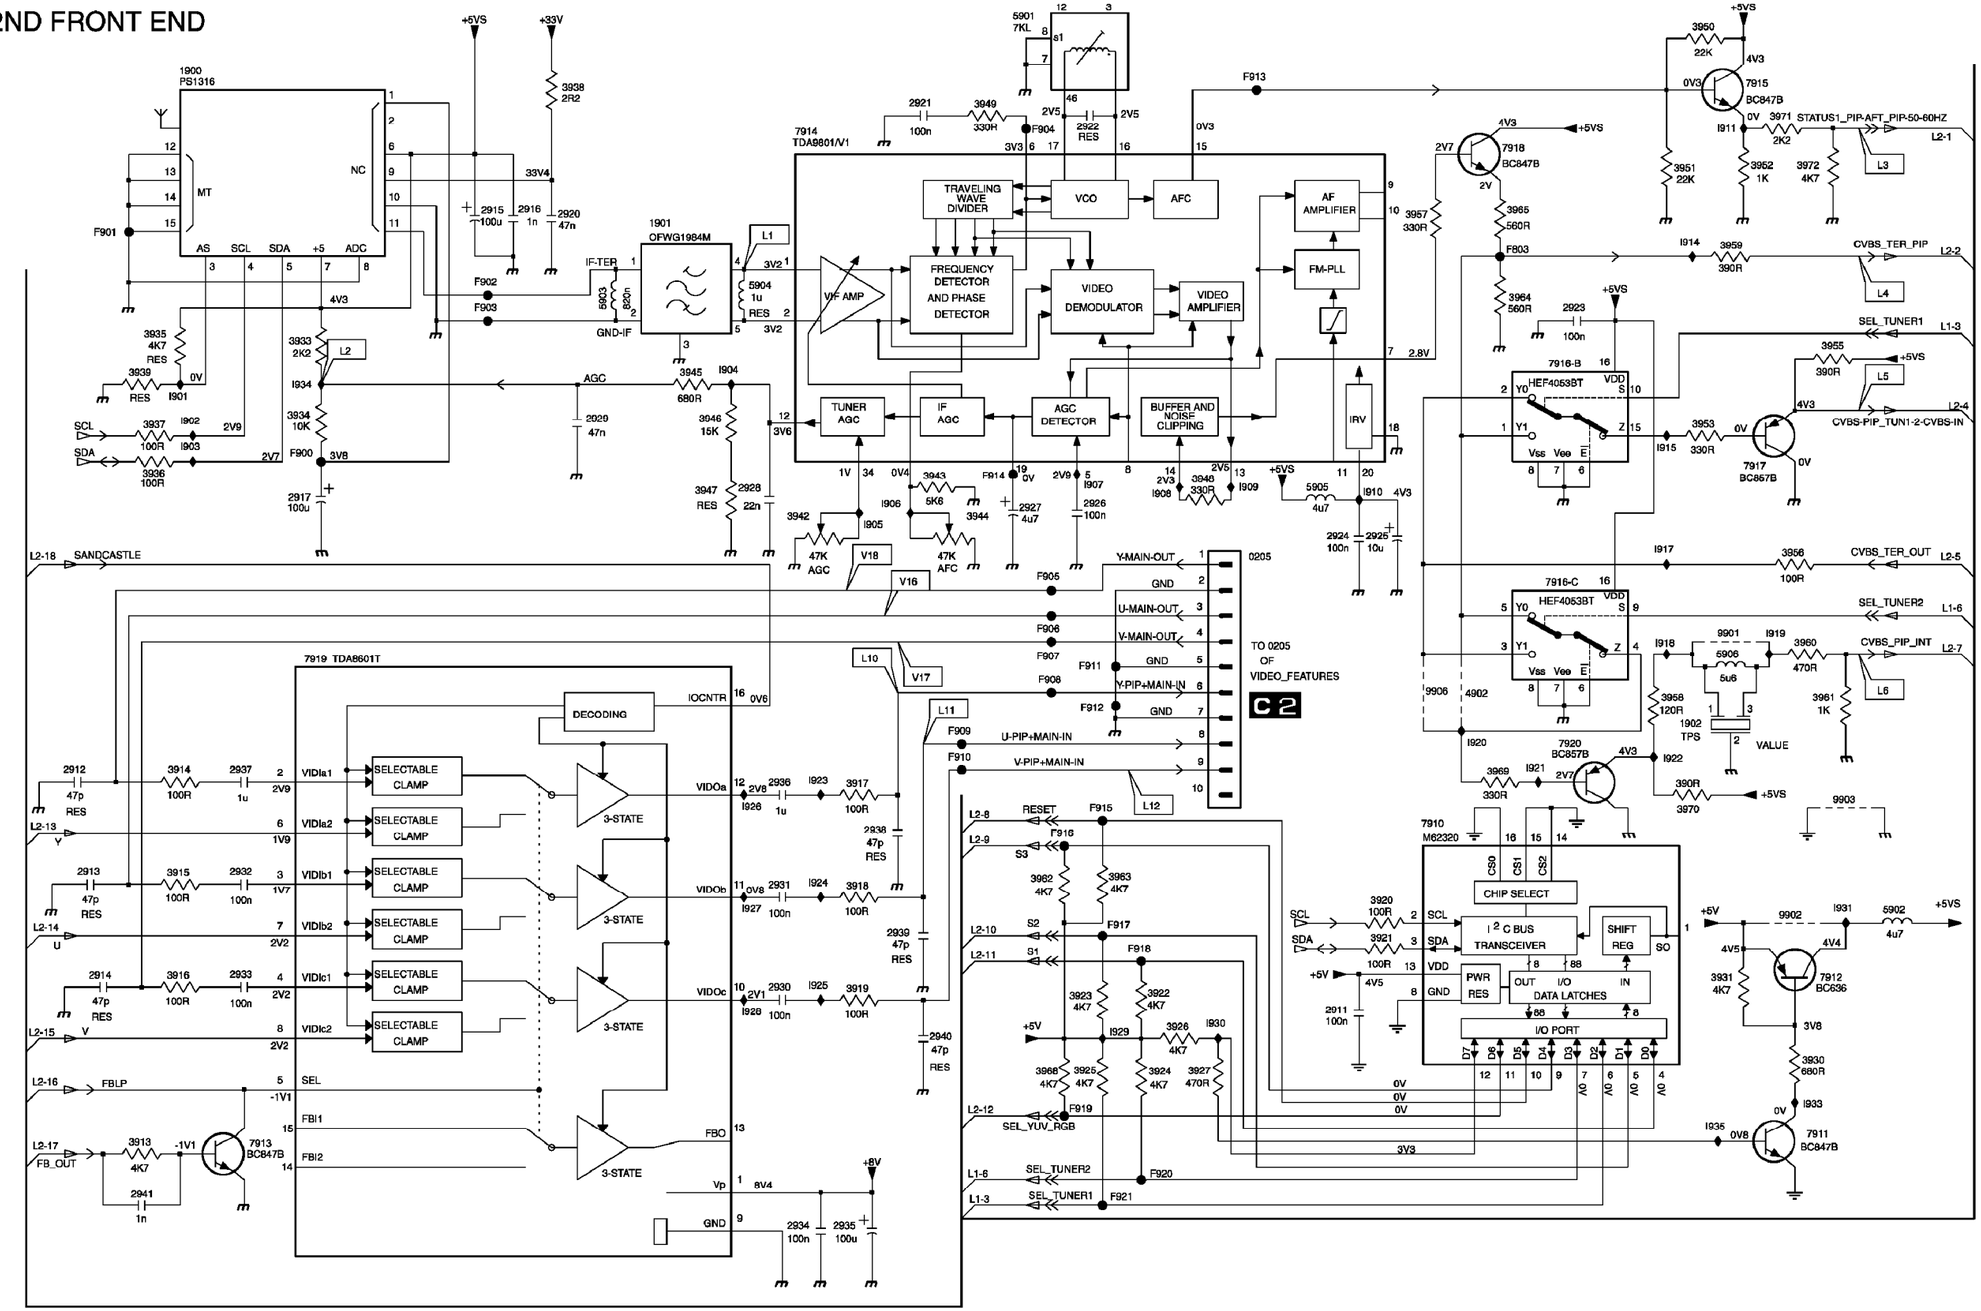
1900 PS1316
MT
NC
AS SCL SDA +5 ADC
F901
+5VS
+33V
3938 2R2
33V4
2915 100u
2916 1n
2920 47n
F902
F903
1901 OFWG1984M
IF-TER
GND-IF
5903 820n
L1
5904 1u RES
3V2
VIF AMP
7914 TDA9801/V1
TRAVELING WAVE DIVIDER
VCO
AFC
FREQUENCY DETECTOR AND PHASE DETECTOR
VIDEO DEMODULATOR
VIDEO AMPLIFIER
AF AMPLIFIER
FM-PLL
TUNER AGC
IF AGC
AGC DETECTOR
BUFFER AND NOISE CLIPPING
IRV
5901 7KL
F913
F904
2921 100n
3949 330R
2922 RES
3935 4K7 RES
3939 RES
3933 2K2
L2
3934 10K
3936 100R
3937 100R
SCL
SDA
2917 100u
3945 680R
3946 15K
3947 RES
2928 22n
2929 47n
3942
47K AGC
3943 5K6
3944
47K AFC
2927 4u7
2926 100n
2924 100n
2925 10u
5905 4u7
3957 330R
3965 560R
3964 560R
F803
7918 BC847B
3950 22K
3951 22K
3952 1K
3971 2K2
3972 4K7
STATUS1_PIP-AFT_PIP-50-60HZ
L2-1
L3
CVBS_TER_PIP
L2-2
L4
SEL_TUNER1
L1-3
7916-B HEF4053BT
3955 390R
L5
CVBS-PIP_TUN1-2-CVBS-IN
L2-4
7917 BC857B
3953 330R
7916-C HEF4053BT
CVBS_TER_OUT
L2-5
3956 100R
SEL_TUNER2
L1-6
3958 120R
1902 TPS
VALUE
5906 5u6
9901
3960 470R
CVBS_PIP_INT
L2-7
L6
3961 1K
7920 BC857B
3969 330R
3970 390R
9903
7910 M62320
CHIP SELECT
I²C BUS TRANSCEIVER
SHIFT REG
PWR RES
I/O DATA LATCHES
I/O PORT
3920 100R
3921 100R
2911 100n
9902
5902 4u7
7912 BC636
3931 4K7
3930 680R
7911 BC847B
7919 TDA8601T
DECODING
IOCNTR
SELECTABLE CLAMP
3-STATE
VIDIa1
VIDIa2
VIDIb1
VIDIb2
VIDIc1
VIDIc2
SEL
FBI1
FBI2
FBO
VIDOa
VIDOb
VIDOc
Vp
GND
2912 47p RES
3914 100R
2937 1u
2913 47p RES
3915 100R
2932 100n
2914 47p RES
3916 100R
2933 100n
2936 1u
2931 100n
2930 100n
3917 100R
3918 100R
3919 100H
2938 47p RES
2939 47p RES
2940 47p RES
2934 100n
2935 100u
+8V
8V4
L2-18 SANDCASTLE
L2-13 V
L2-14 U
L2-15 V
L2-16 FBLP
L2-17 FB_OUT
3913 4K7
2941 1n
7913 BC847B
-1V1
L10
V17
L11
L12
V16
V18
F905
F906
F907
F908
F909
F910
F911
F912
Y-MAIN-OUT
GND
U-MAIN-OUT
V-MAIN-OUT
Y-PIP+MAIN-IN
U-PIP+MAIN-IN
V-PIP+MAIN-IN
0205
TO 0205 OF VIDEO_FEATURES
C2
L2-8 RESET
L2-9 S3
L2-10 S2
L2-11 S1
L2-12 SEL_YUV_RGB
L1-6 SEL_TUNER2
L1-3 SEL_TUNER1
F915
F916
F917
F918
F919
F920
F921
3962 4K7
3963 4K7
3923 4K7
3922 4K7
3966 4K7
3925 4K7
3924 4K7
3926 4K7
3927 470R
3930 330R
3948 330R
3940 330R
3941 330R
3954 330R
3967 330R
3968 330R
3969 330R
3970 390R
3955 390R
3959 390R
3956 100R
3960 470R
3961 1K
3958 120R
3930 680R
3931 4K7
3932 100n
3933 2K2
3934 10K
3935 4K7
3936 100R
3937 100R
3938 2R2
3939 RES
3940 330R
3941 330R
3942
3943 5K6
3944
3945 680R
3946 15K
3947 RES
3948 330R
3949 330R
3950 22K
3951 22K
3952 1K
3953 330R
3954 330R
3955 390R
3956 100R
3957 330R
3958 120R
3959 390R
3960 470R
3961 1K
3962 4K7
3963 4K7
3964 560R
3965 560R
3966 4K7
3967 330R
3968 4K7
3969 330R
3970 390R
3971 2K2
3972 4K7
3973 330R
3974 330R
3975 330R
3976 330R
3977 330R
3978 330R
3979 330R
3980 330R
3981 330R
3982 330R
3983 330R
3984 330R
3985 330R
3986 330R
3987 330R
3988 330R
3989 330R
3990 330R
3991 330R
3992 330R

NOT USED IN MODELS: , 51PP9363H17, 51PW936317F, 51PP9363H17, 51PW936317F, 55PP9352/17, 55PP935201, 55PP9352/17, 55PP935201, 55PP9363H17, 55PW936317F, 55PP9363H17, 55PW936317F (7621) - PIP Panel Sch
55PP9502/84, 55PP9502/84, 55PP950201, 55PP950217, 55PP950201, 55PP950217, 55PW9383/17F, 55RW9515/35, 55PW9383/17F, 55RW9515/35, 60PP9352/17, 60PP935201, 60PP9352/17, 60PP935201, 60PP9363H17, 60PW936

L2 PIP COLOR

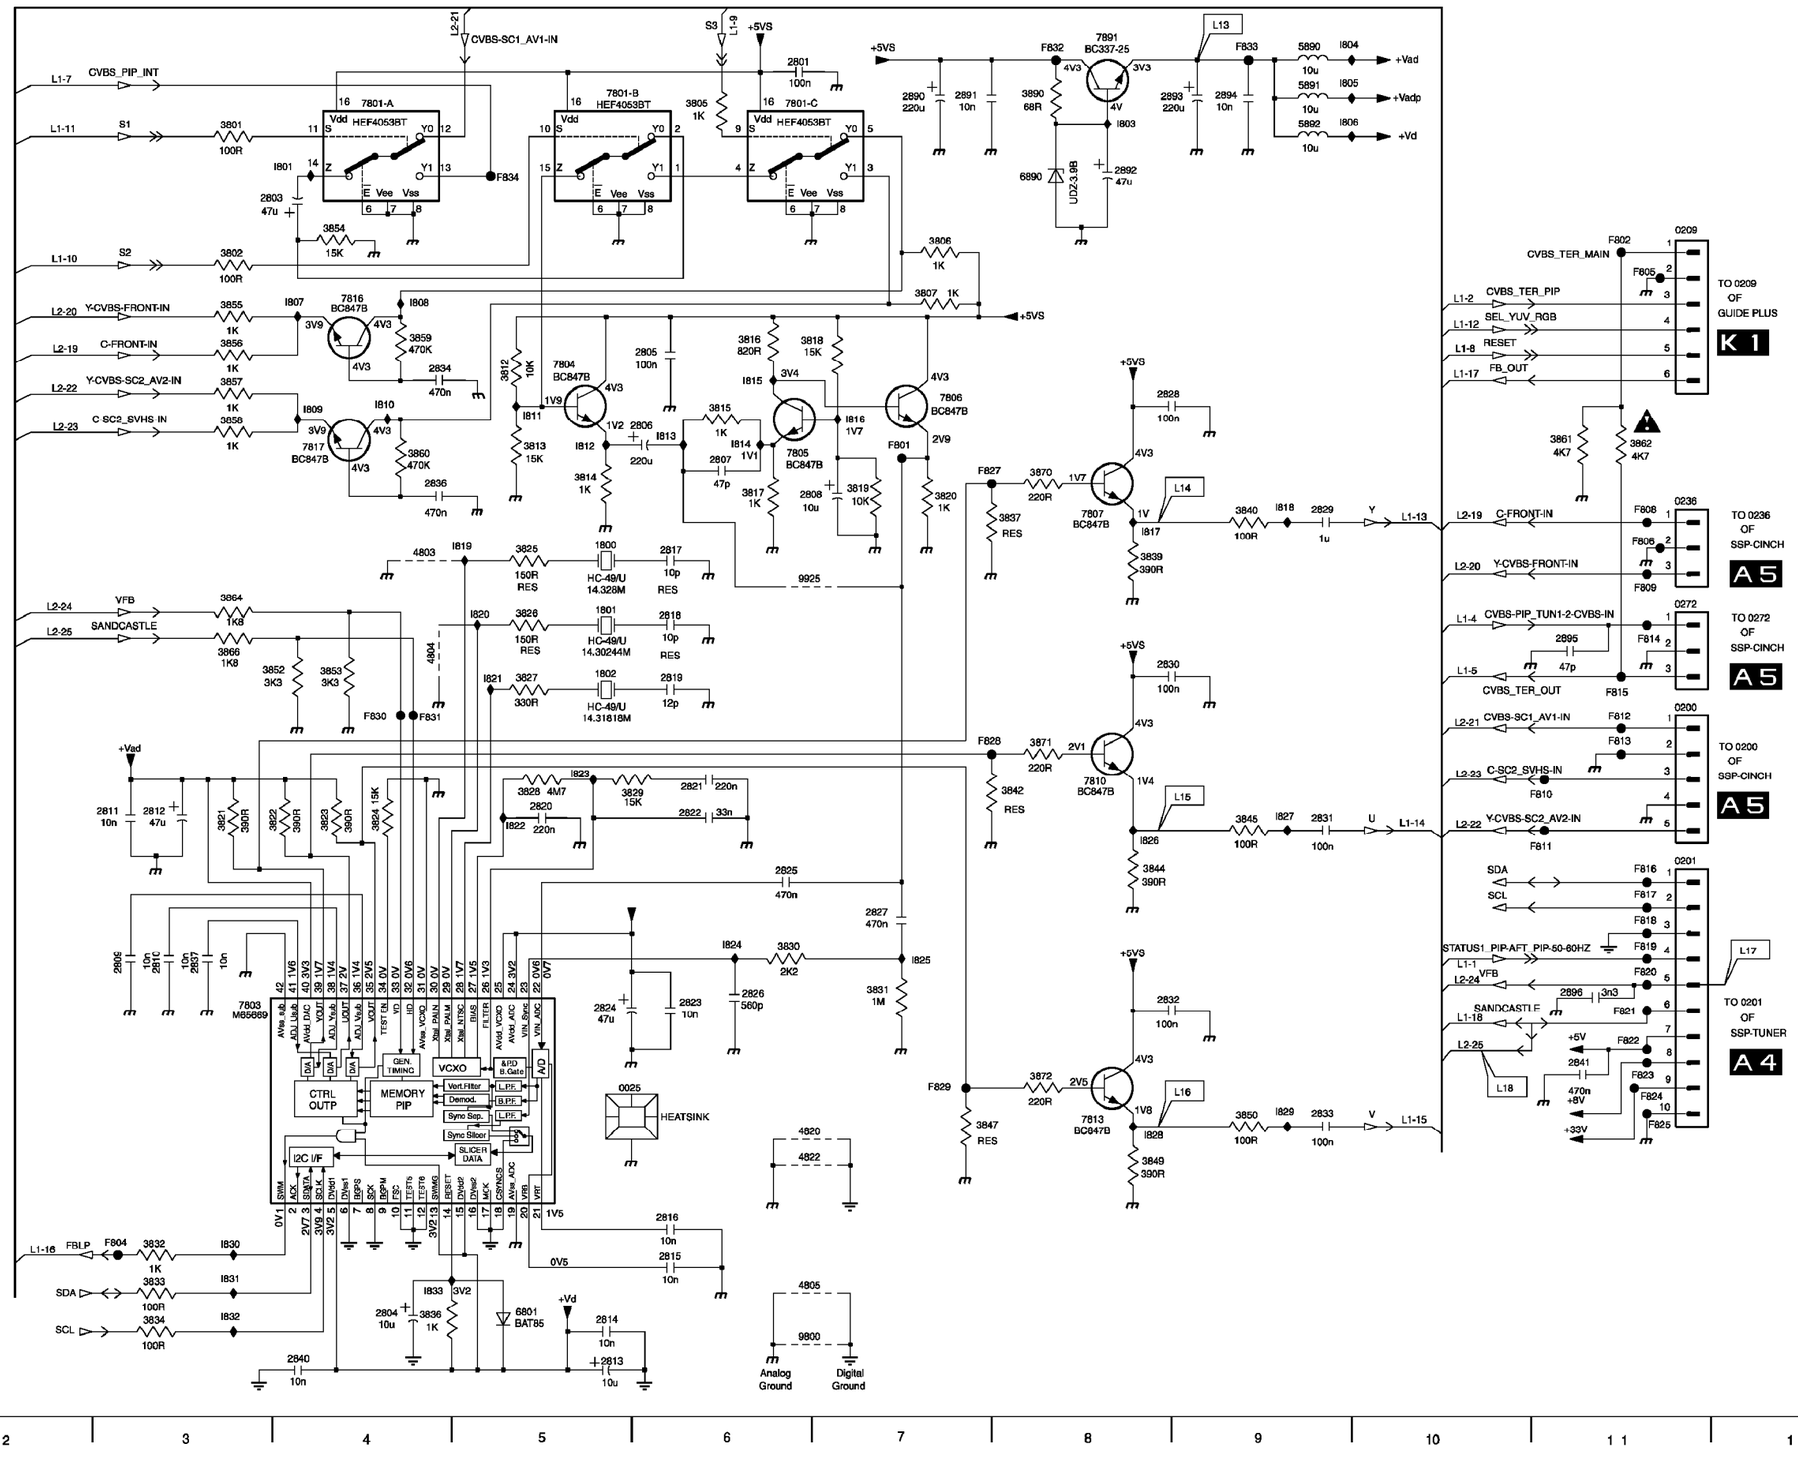

All Models (7621) - HOP Panel Schematic (1 of 2)

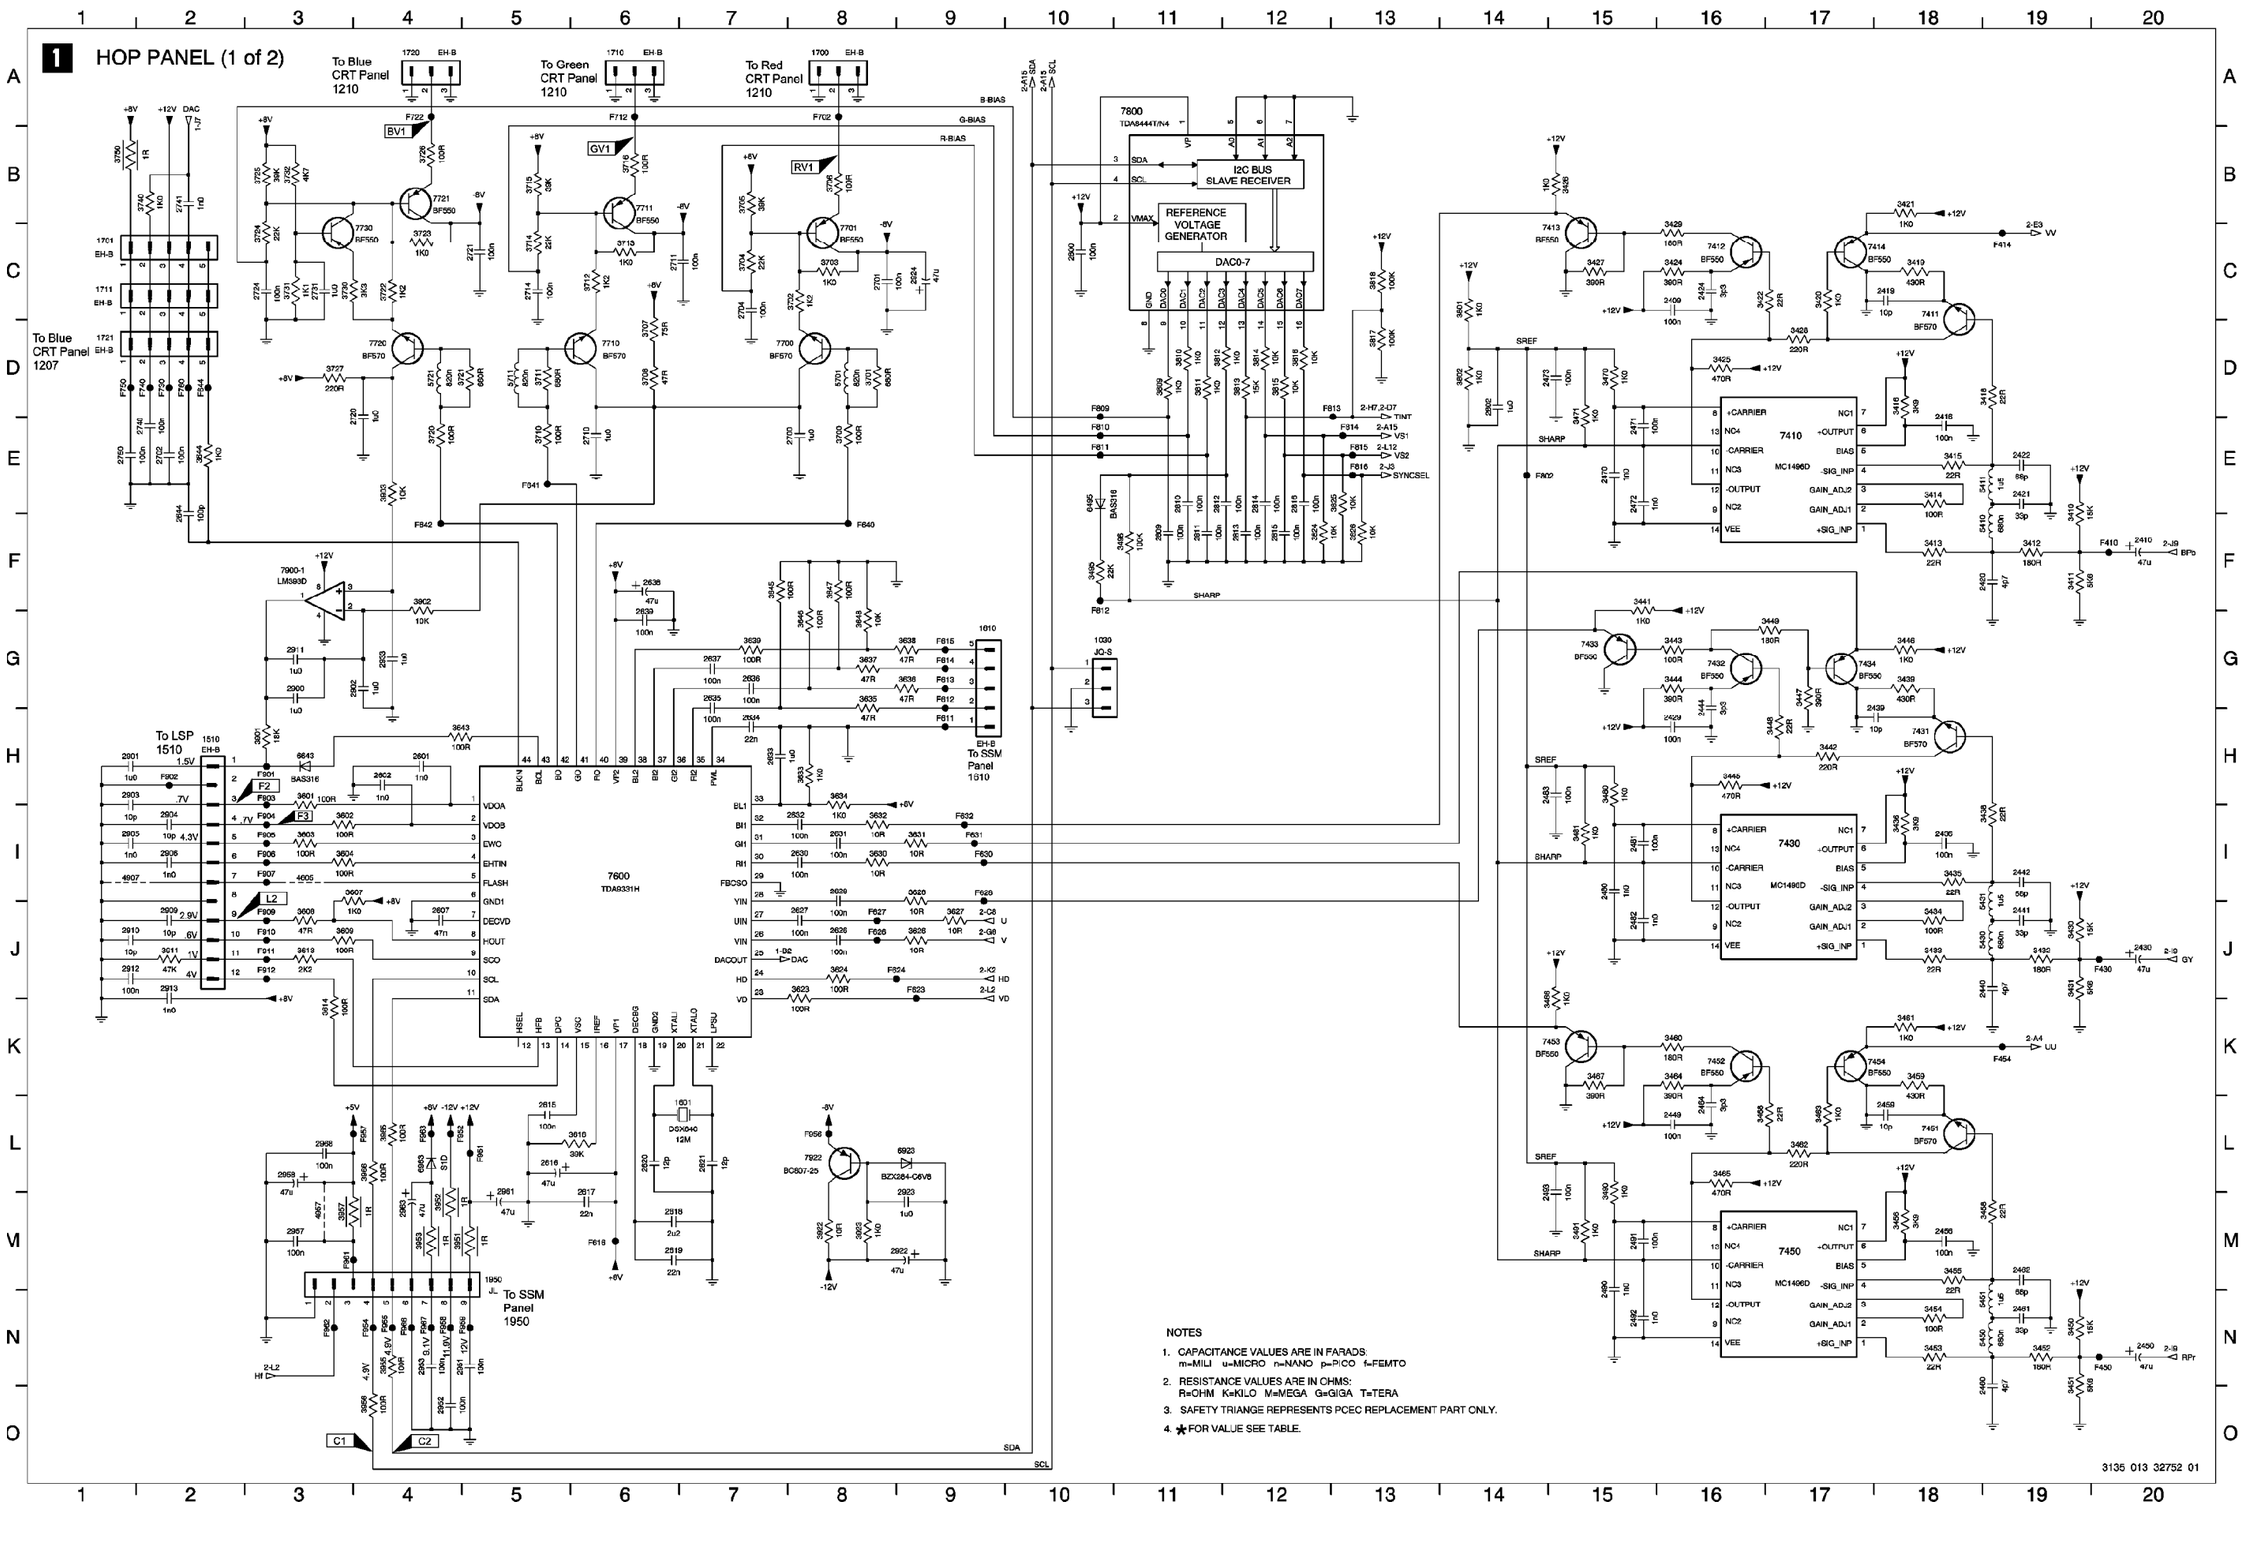

2 HOP PANEL (2 of 2)

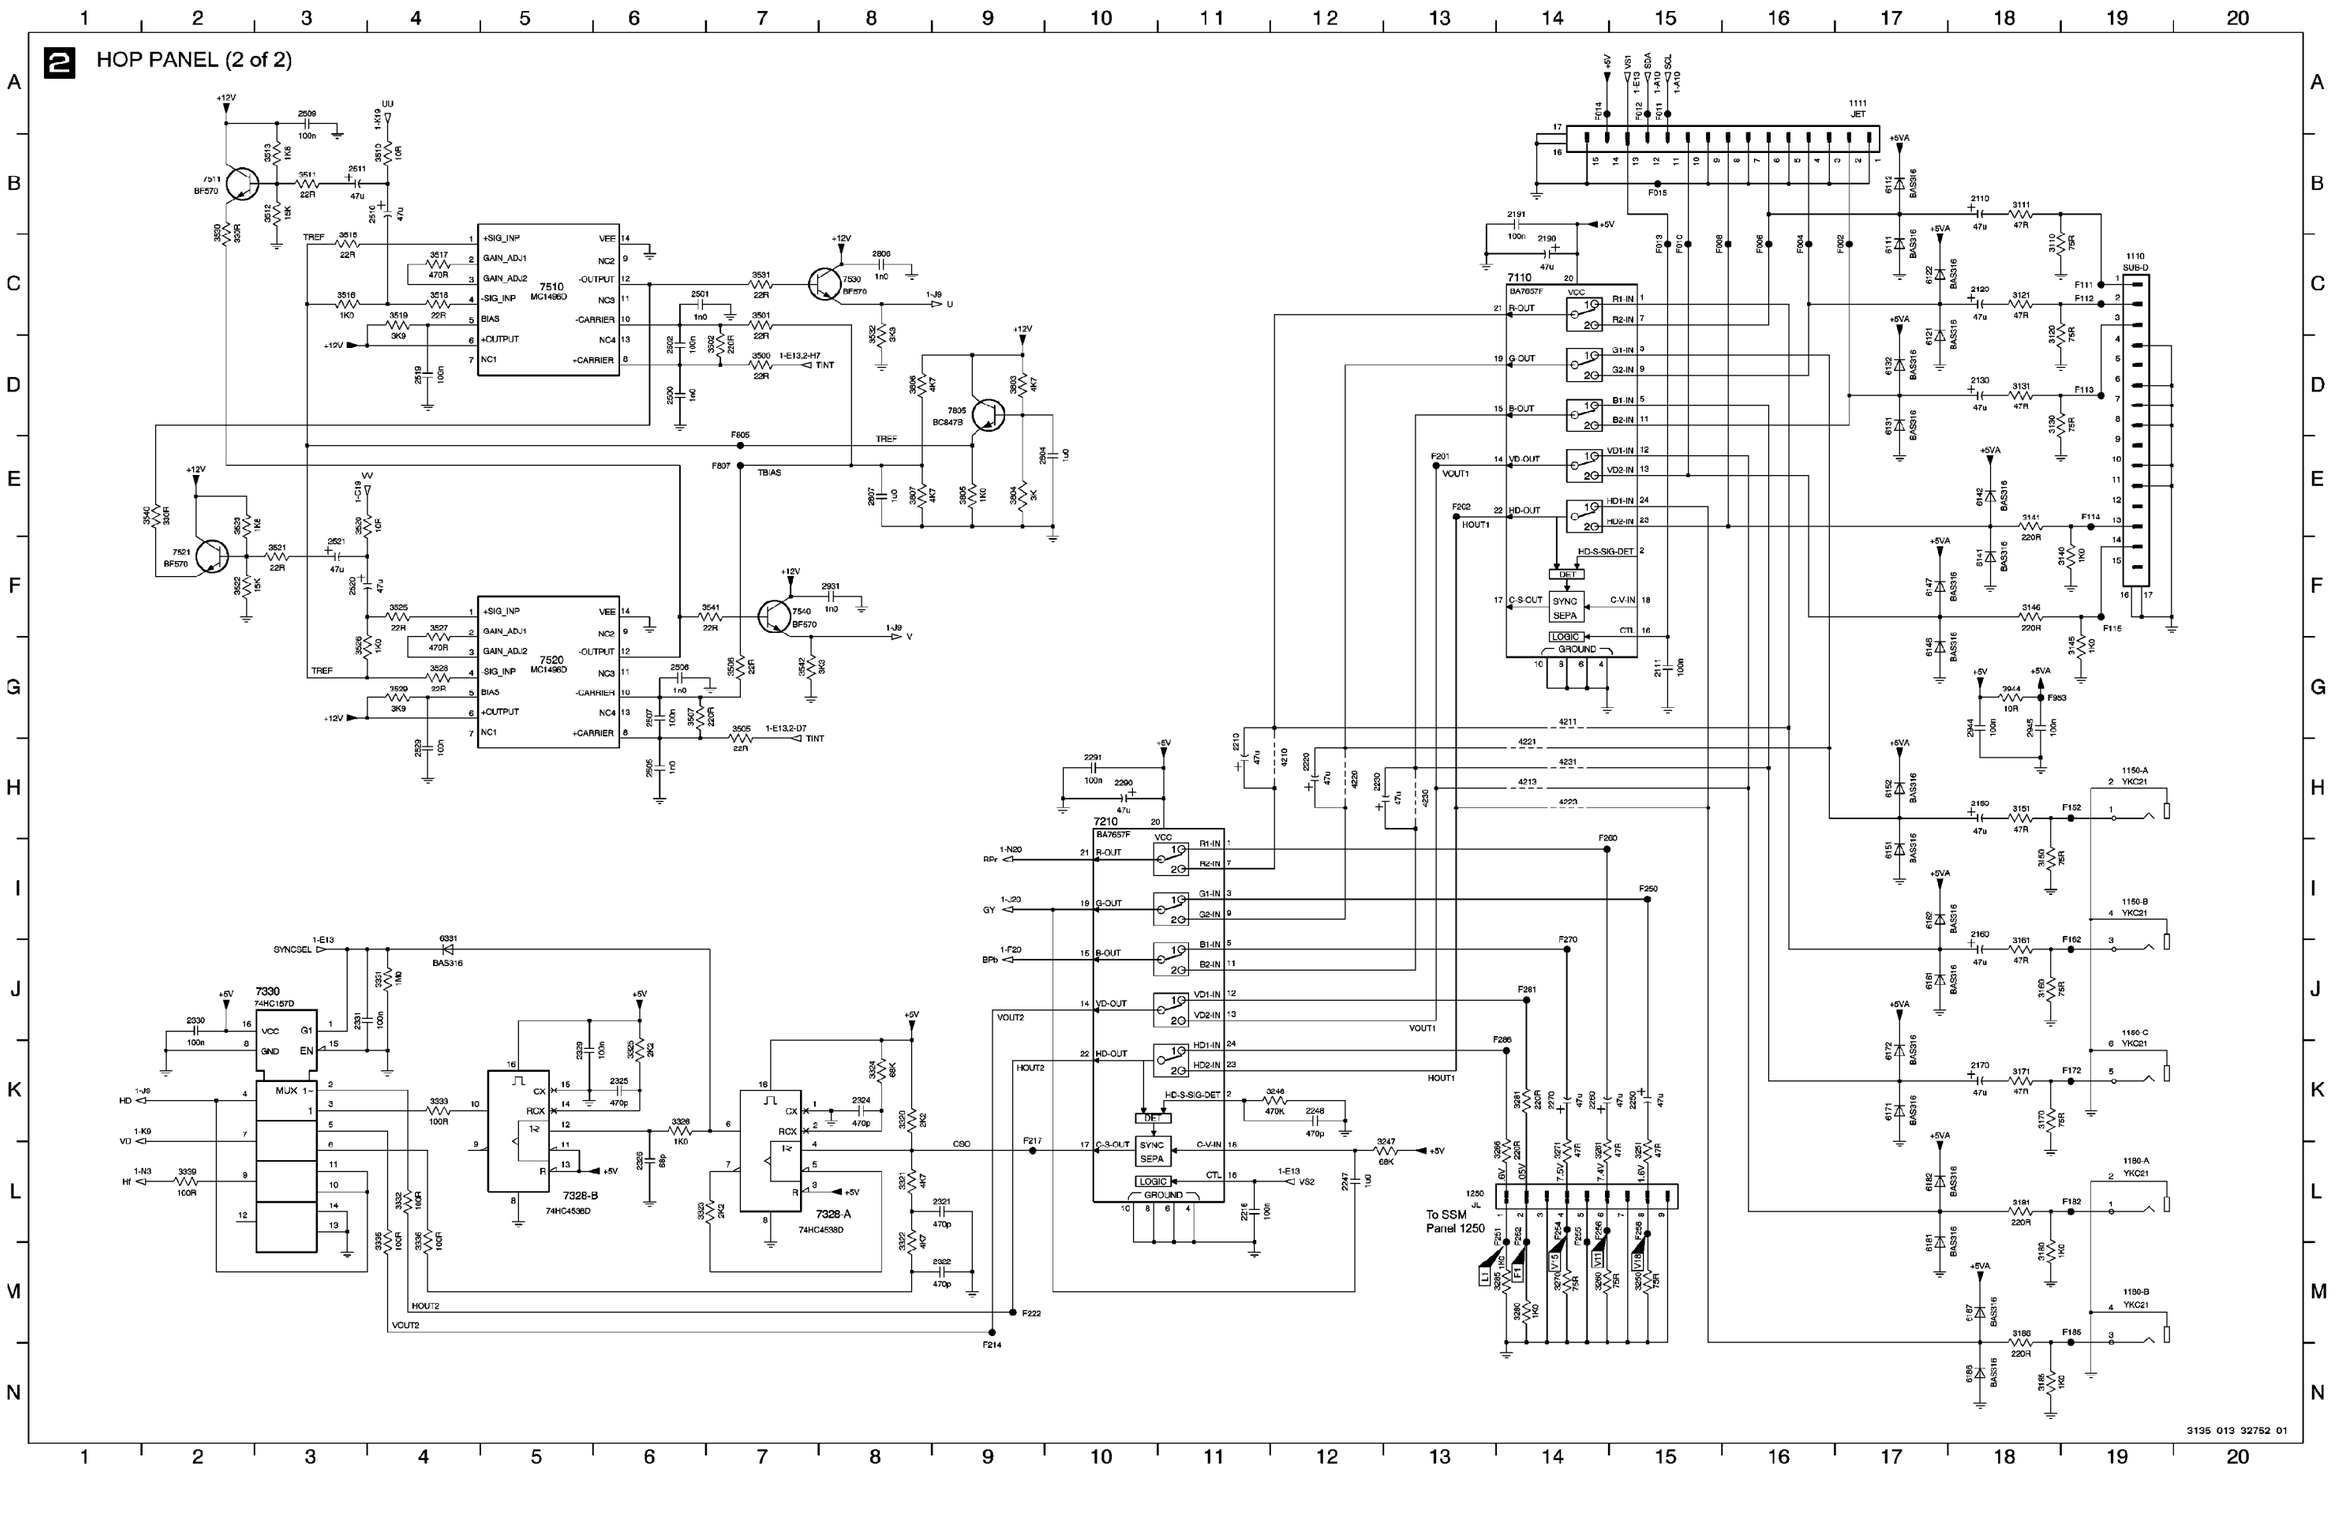

USED ONLY IN MODELS: 55PP9352/17, 55PP935201, 55PP9352/17, 55PP935201, 55PP950201, 55PP950217, 55PP950201, 55PP950217, 60PP9352/17, 60PP935201, 60PP9352/17, 60PP935201 (7621) - 3D Comb Filter Panel
60PP9502/17, 60PP950201, 60PP9502/17, 60PP950201, 55PP9502/84, 55PP9502/84, 55PW9383/17F, 55RW9515/35, 55PW9383/17F, 55RW9515/35, 60PP938317F, 60PW938317F, 60PP938317F, 60PW938317F

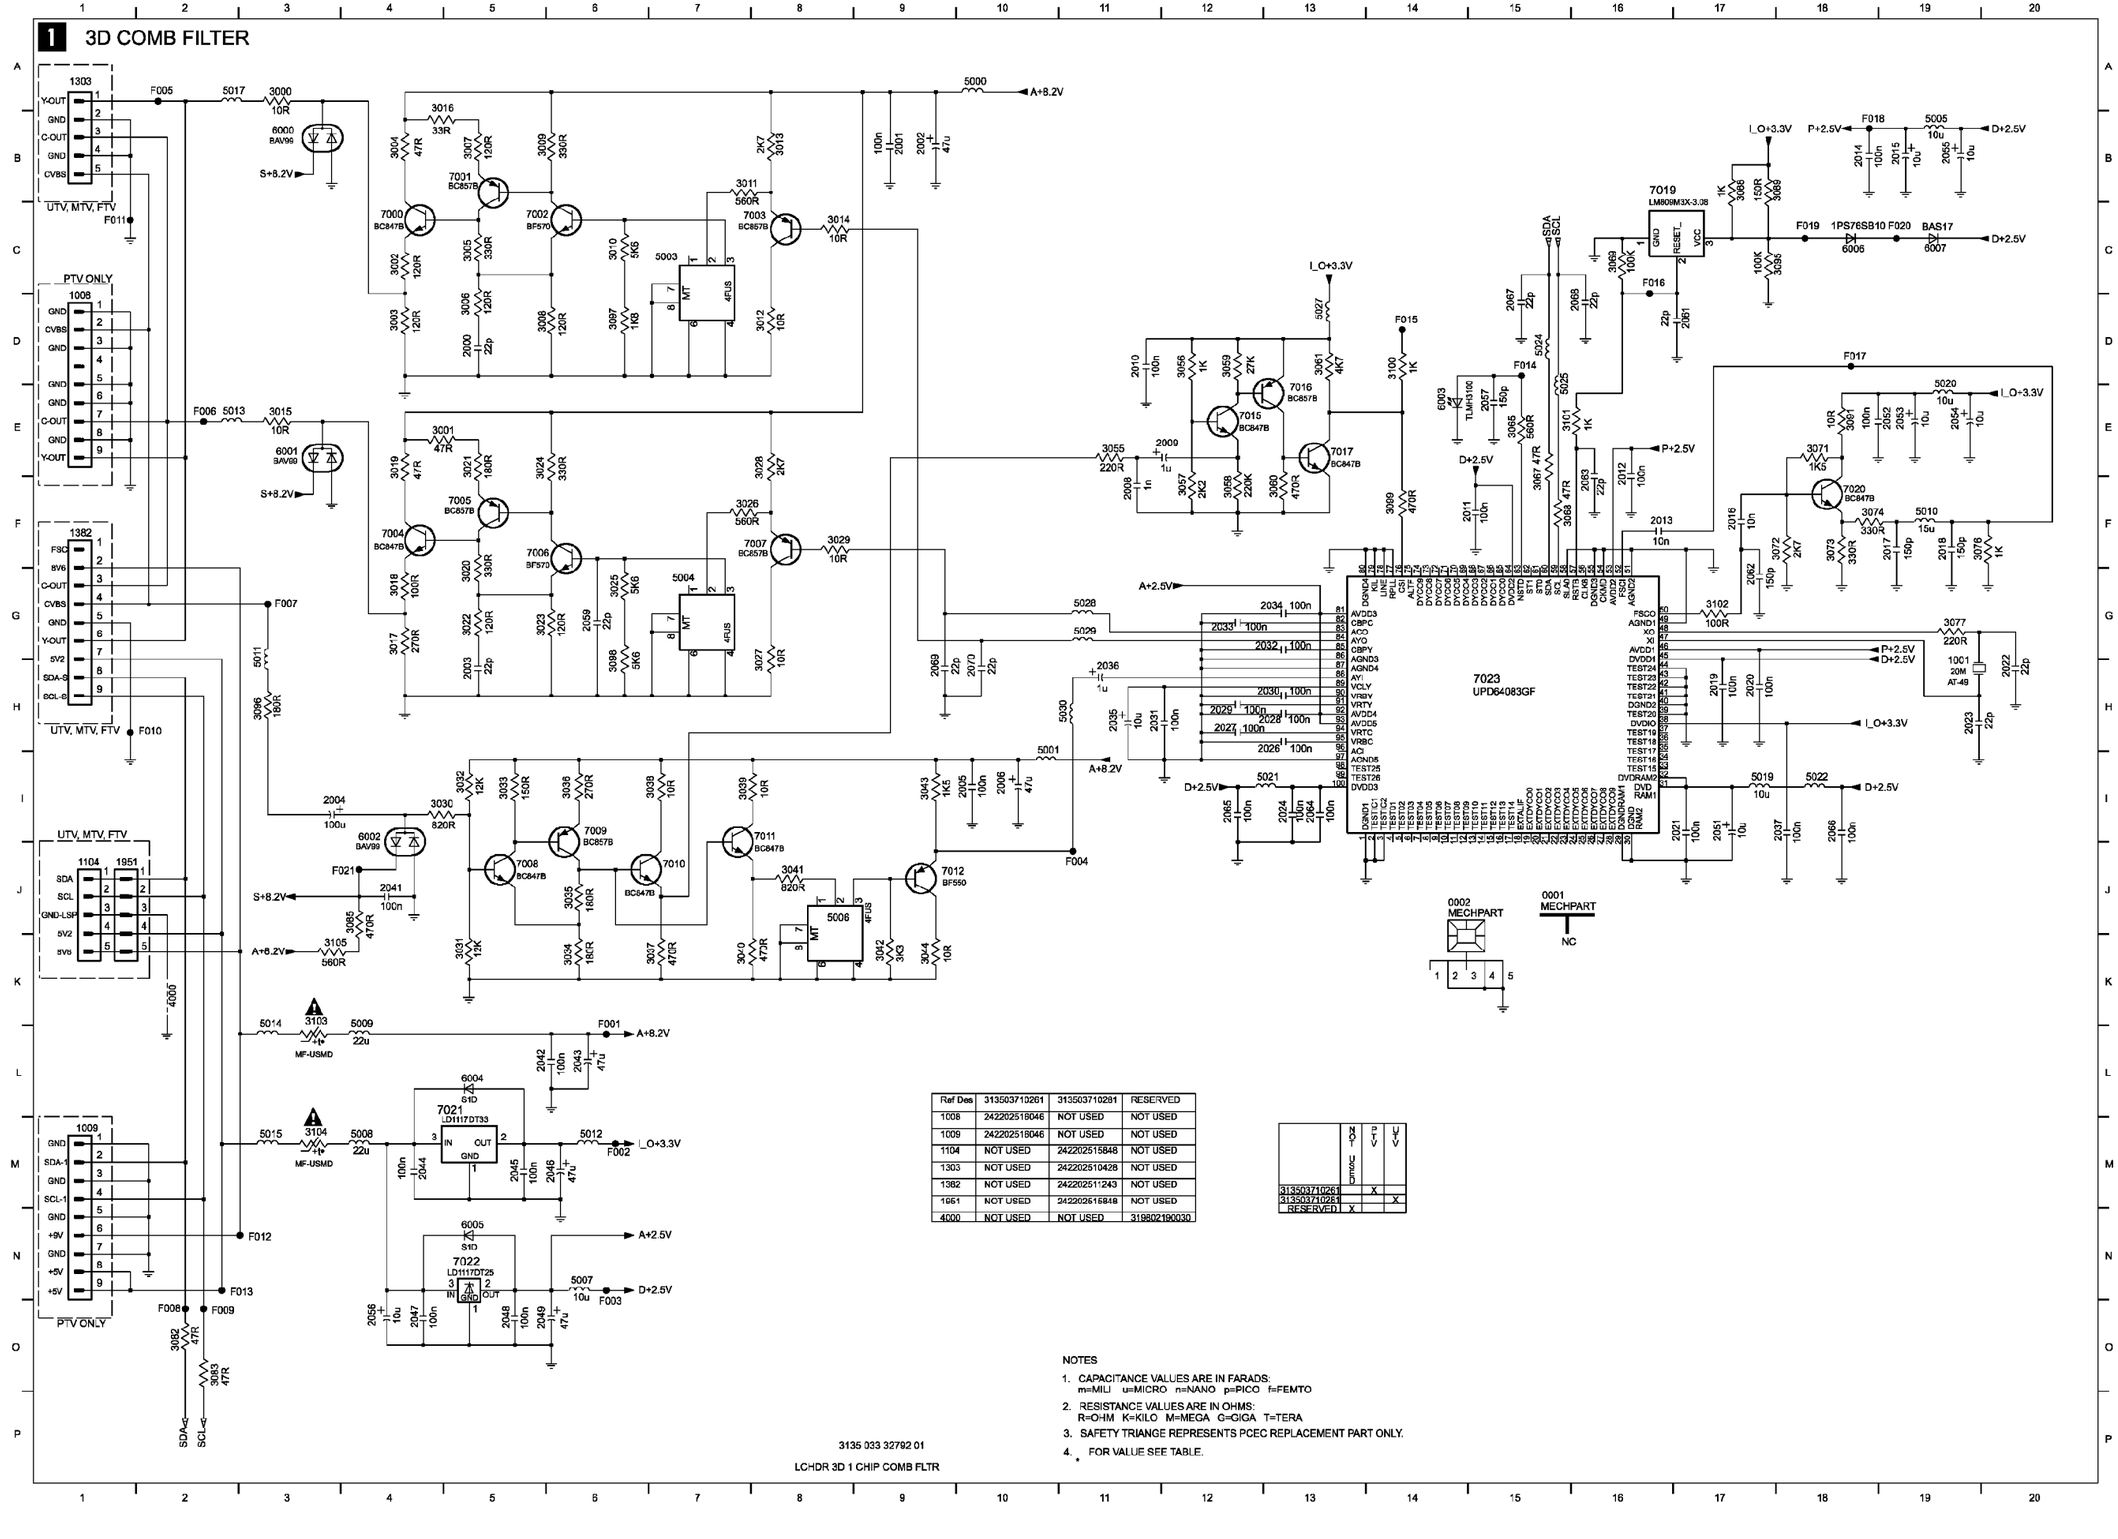

Ref Des	313503712261	313503710291	RESERVED
1008	242202518046	NOT USED	NOT USED
1009	242202518046	NOT USED	NOT USED
1104	NOT USED	242202515848	NOT USED
1303	NOT USED	242202510428	NOT USED
1382	NOT USED	242202511243	NOT USED
1951	NOT USED	242202515848	NOT USED
4000	NOT USED	NOT USED	319802190030

	POS TV DVNC	PTV	UTV
313503710261		X	
313503710281			X
RESERVED	X		

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * FOR VALUE SEE TABLE.

3135 033 32792 01

LCHDR 3D 1 CHIP COMB FLTR

USED ONLY IN MODELS: 55PP9352/17, 55PP935201, 55PP9352/17, 55PP935201, 55PP950201, 55PP950217, 55PP950201, 55PP950217, 60PP9352/17, 60PP935201, 60PP9352/17, 60PP935201 (7621) - DW PIP Panel Schemat
60PP9502/17, 60PP950201, 60PP9502/17, 60PP950201, 55PP9502/84, 55PP9502/84, 51PP9363H17, 51PW936317F, 51PP9363H17, 51PW936317F, 55PP9363H17, 55PW936317F, 55PP9363H17, 55PW936317F, 55PW9383/17F, 55RW

C 1

MULTI-PIP CONTROLLER (DW-PANEL)

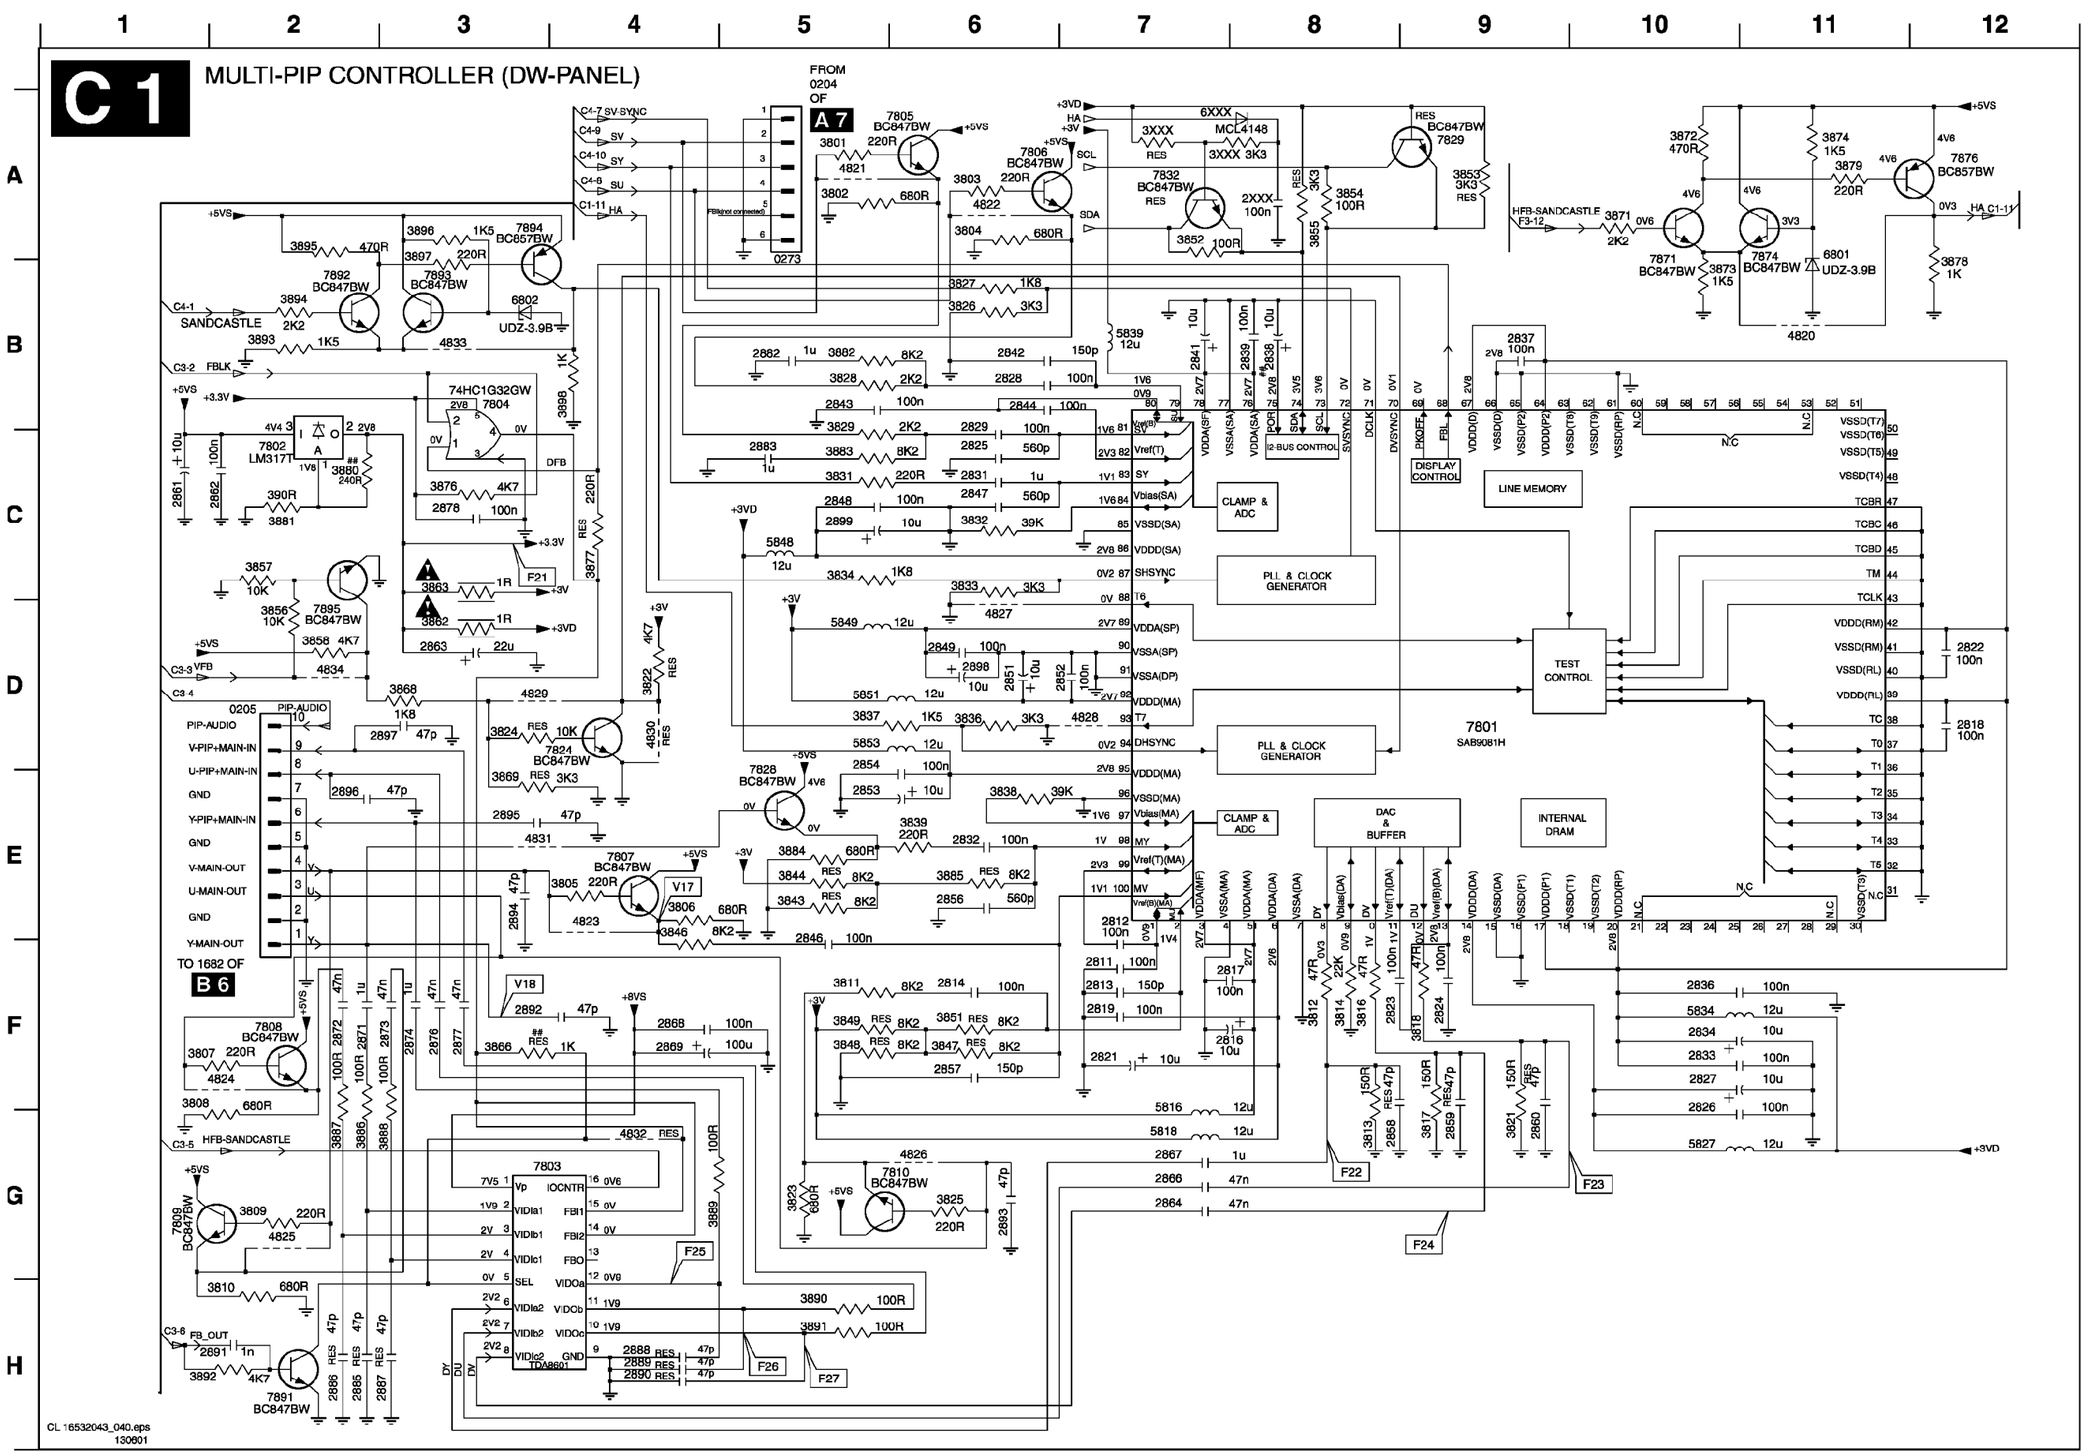

0205 D2	3825 G6	7824 D3
0273 B5	3826 B6	7828 D5
2811 F7	3827 B6	7829 A9
2812 E7	3828 B5	7832 A7
2813 F7	3829 C5	7871 B1(
2814 F6	3831 C5	7874 B11
2816 F7	3832 C6	7876 A1
2817 F8	3833 C6	7891 H2
2818 D12	3834 C5	7892 B2
2819 F7	3836 D6	7893 B3
2821 F7	3837 D5	7894 A3
2822 D12	3838 E6	7895 D2
2823 F8	3839 E6	
2824 F9	3843 E5	
2825 C6	3844 E5	
2826 G10	3846 E4	
2827 F10	3847 F6	
2828 B6	3848 F5	
2829 C6	3849 F5	
2831 C6	3851 F6	
2832 E6	3852 A7	
2833 F10	3853 A9	
2834 F10	3854 A8	
2836 F10	3855 A8	
2837 B9	3856 D2	
2838 B8	3857 C2	
2839 B8	3858 D2	
2841 B7	3862 D3	
2842 B6	3863 C3	
2843 B5	3866 F3	
2844 B6	3868 D3	
2846 F5	3869 E3	
2847 C6	3871 A10	
2848 C5	3872 A10	
2849 D6	3873 B10	
2851 D6	3874 A11	
2852 D7	3876 C3	
2853 E5	3877 C4	
2854 D5	3878 B12	
2856 E6	3879 A11	
2857 F6	3880 C2	
2858 G8	3881 C2	
2859 G9	3882 B5	
2860 G9	3883 C5	
2861 C1	3884 E5	
2862 C2	3885 E6	
2863 D3	3886 G2	
2864 G7	3887 G2	
2866 G7	3888 G3	
2867 G7	3889 G4	
2868 F4	3890 H5	
2869 F4	3891 H5	
2871 F2	3892 H1	
2872 F2	3893 B2	
2873 F3	3894 B2	
2874 F3	3895 A2	
2876 F3	3896 A3	
2877 F3	3897 B3	
2878 C3	3898 B4	
2882 B5	3XXX A7	
2883 C5	3XXX A7	
2885 H2	4820 B11	
2886 H2	4821 A5	
2887 H2	4822 A6	
2888 H4	4823 E4	
2889 H4	4824 F2	
2890 H4	4825 G2	
2891 H2	4826 G6	
2892 F3	4827 D6	
2893 G6	4828 D7	
2894 E3	4829 D3	
2895 E3	4830 D4	
2896 E2	4831 E3	
2897 D3	4832 G4	
2898 D6	4833 B3	
2899 C5	4834 D2	
2XXX A8	5816 G7	
3801 A5	5818 G7	
3802 A5	5827 G10	
3803 A6	5834 F10	
3804 A6	5839 B7	
3805 E4	5848 C5	
3806 E4	5849 D5	
3807 F1	5851 D5	
3808 F1	5853 D5	
3809 G2	6801 A11	
3810 H2	6802 B3	
3811 F5	6XXX A7	
3812 F8	7801 D9	
3813 G8	7802 C2	
3814 F8	7803 G3	
3816 F8	7804 B3	
3817 G9	7805 A5	
3818 F9	7806 A6	
3821 G9	7807 E4	
3822 D4	7808 F2	
3823 G5	7809 G1	
3824 D3	7810 G5	

C 2 TUNER PANEL

0255 C5
2261 C1
2262 C2
2265 A3
2269 D5
3263 A2
3264 A2
3265 B2
3267 D3
3268 D3
3270 C2
5261 B1
7201 B4

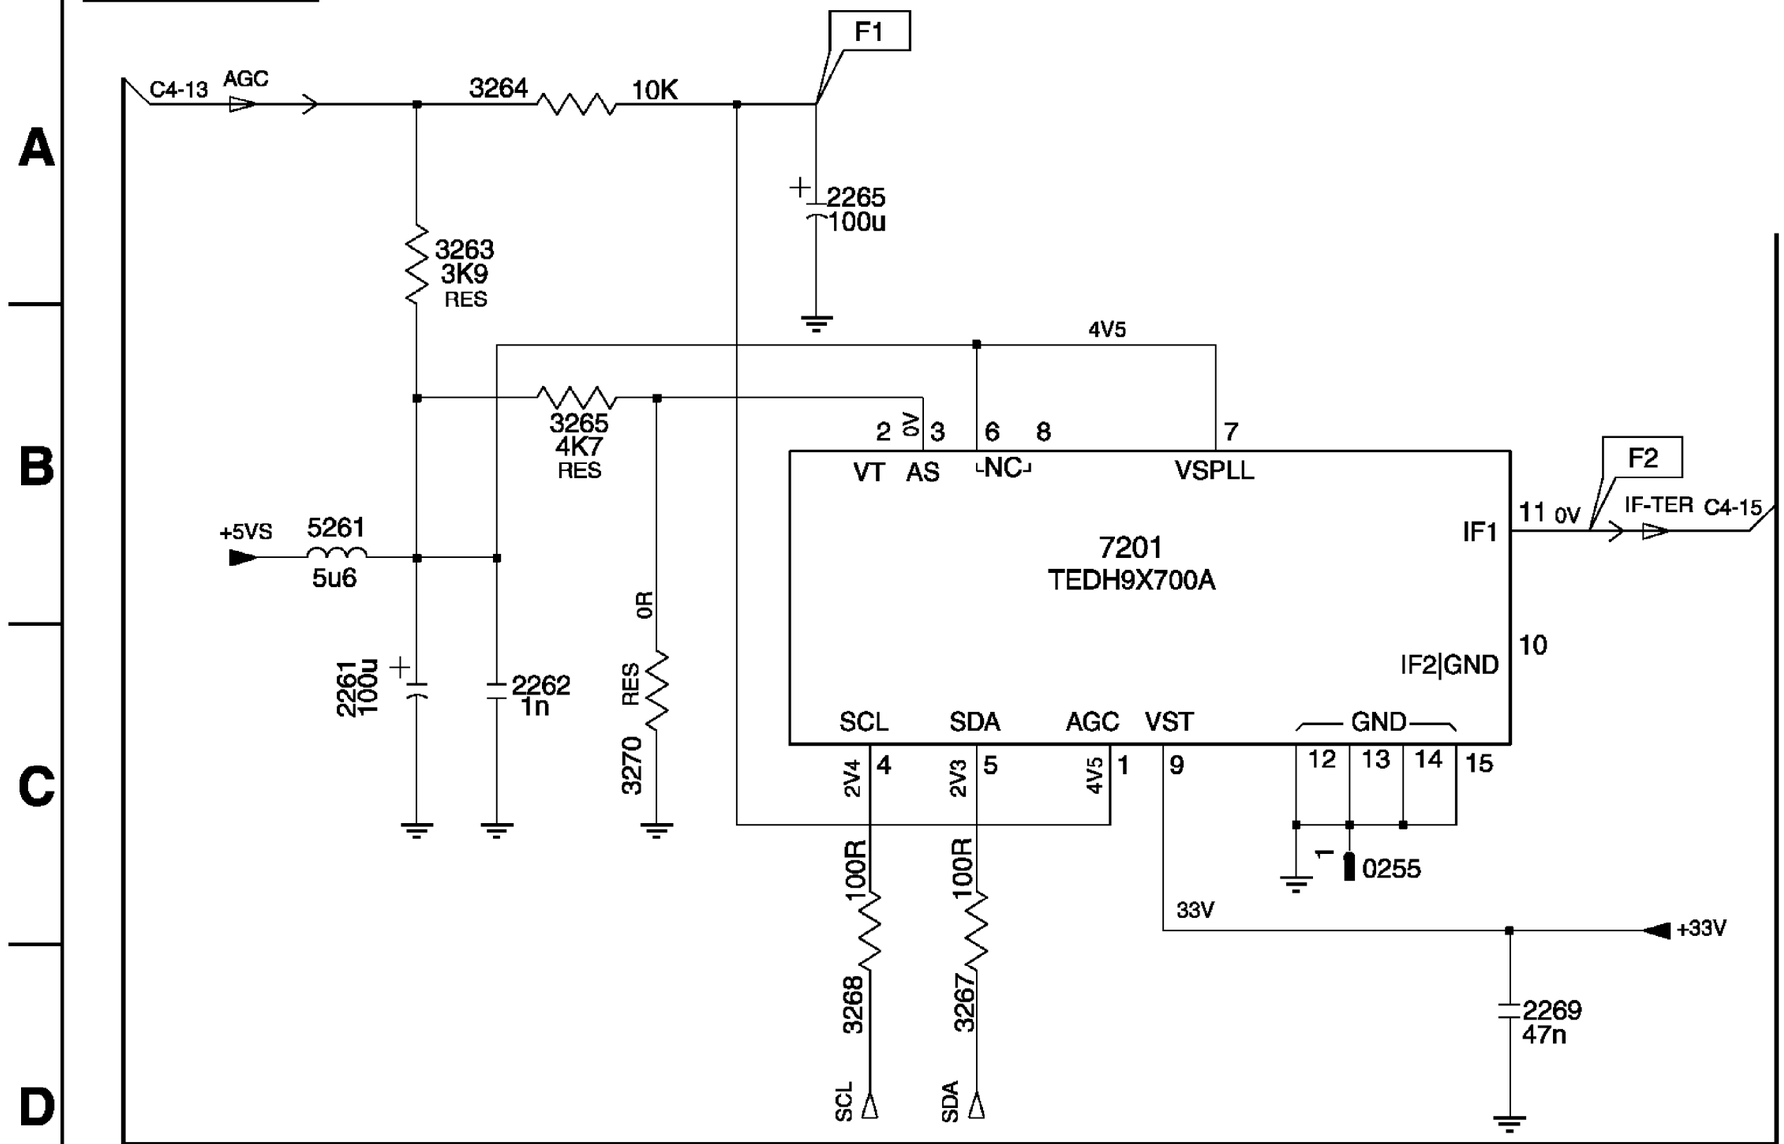

CL 16532043_041.eps
180701

USED ONLY IN MODELS: 55PP9352/17, 55PP935201, 55PP9352/17, 55PP935201, 55PP950201, 55PP950217, 55PP950201, 55PP950217, 60PP9352/17, 60PP935201, 60PP9352/17, 60PP935201 (7621) - DW PIP Panel Schemat
60PP9502/17, 60PP950201, 60PP9502/17, 60PP950201, 55PP9502/84, 55PP9502/84, 51PP9363H17, 51PW936317F, 51PP9363H17, 51PW936317F, 55PP9363H17, 55PW936317F, 55PP9363H17, 55PW936317F, 55PW9383/17F, 55RW

C 3 I/O PROCESSING

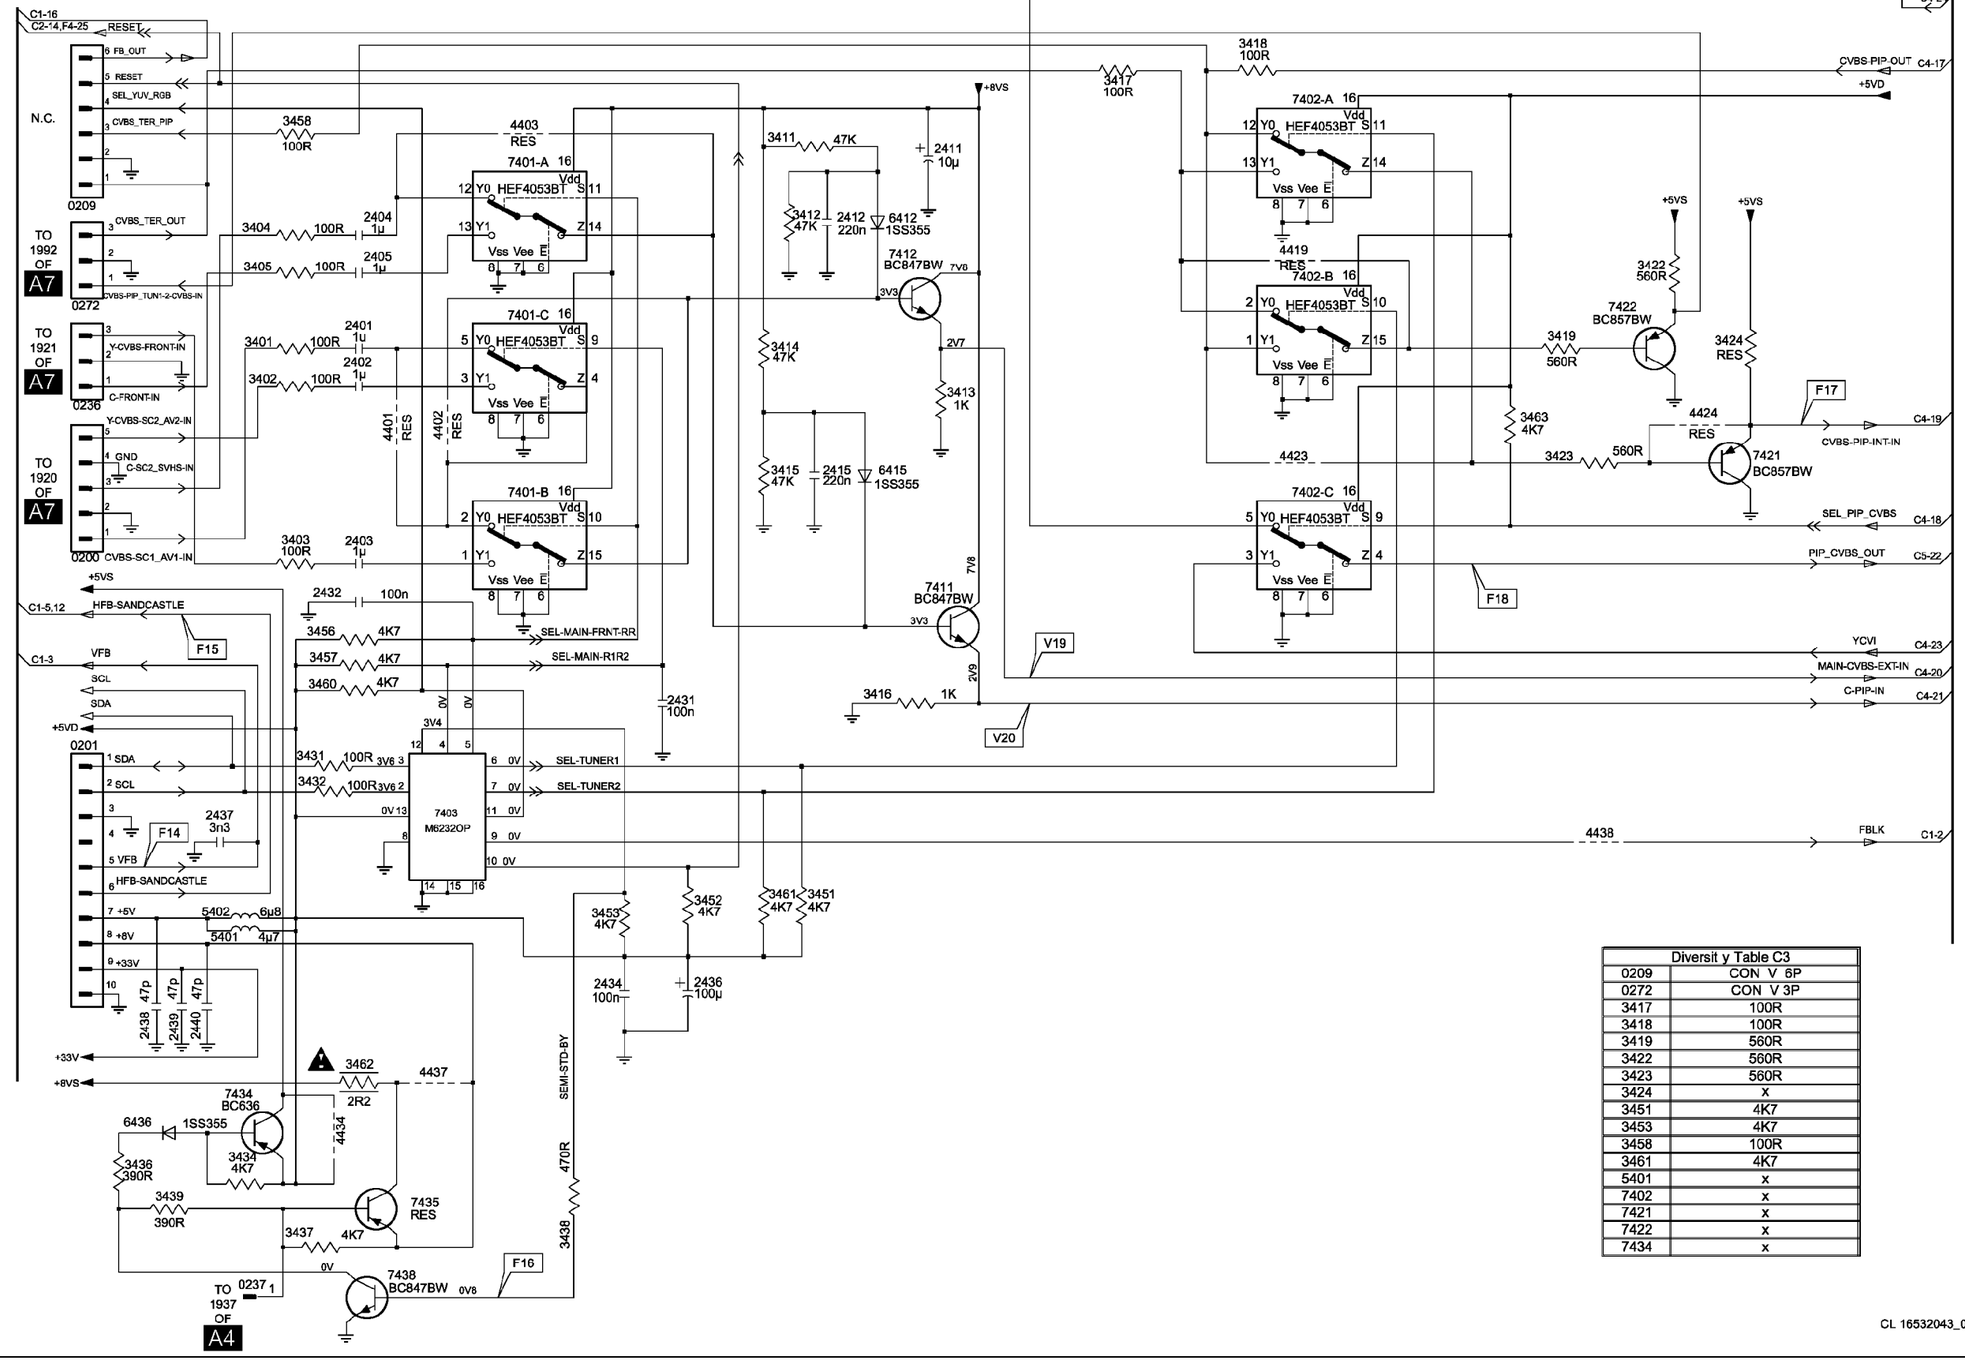

Diversit y Table C3	
0209	CON V 6P
0272	CON V 3P
3417	100R
3418	100R
3419	560R
3422	560R
3423	560R
3424	x
3451	4K7
3453	4K7
3458	100R
3461	4K7
5401	x
7402	x
7421	x
7422	x
7434	x

CL 16532043_042.eps
180701

0200 D2
0201 E2
0209 B2
0236 C2
0237 H2
0272 C1
2401 C3
2402 C3
2403 D3
2404 B3
2405 B3
2411 B6
2412 B6
2415 C6
2431 E5
2432 D3
2434 F4
2436 F5
2437 E2
2438 G2
2439 G2
2440 G2
3401 C3
3402 C3
3403 D3
3404 B2
3405 B2
3411 B5
3412 B6
3413 C6
3414 C5
3415 C5
3416 E6
3417 A7
3418 A8
3419 C10
3422 B10
3423 C10
3424 C11
3431 E3
3432 E3
3434 G2
3436 G2
3437 H3
3438 H4
3439 H2
3451 F6
3452 F5
3453 F4
3456 D3
3457 E3
3458 B3
3460 E3
3461 F5
3462 G3
3463 C10
4401 C3
4402 C4
4403 B4
4419 B8
4423 C8
4424 C11
4434 G3
4437 G3
4438 F10
5401 F2
5402 F2
6412 B6
6415 C6
6436 G2
7401-A B4
7401-B D4
7401-C C4
7402-A A8
7402-B B8
7402-C D8
7403 E4
7411 D6
7412 B6
7421 C11
7422 C10
7434 G2
7435 H3
7438 H3

USED ONLY IN MODELS: 55PP9352/17, 55PP935201, 55PP9352/17, 55PP935201, 55PP950201, 55PP950217, 55PP950201, 55PP950217, 60PP9352/17, 60PP935201, 60PP9352/17, 60PP935201 (7621) - DW PIP Panel Schemat
60PP9502/17, 60PP950201, 60PP9502/17, 60PP950201, 55PP9502/84, 55PP9502/84, 51PP9363H17, 51PW936317F, 51PP9363H17, 51PW936317F, 55PP9363H17, 55PW936317F, 55PP9363H17, 55PW936317F, 55PW9383/17F, 55RW

C 4 IF-VIDEO-SYNC

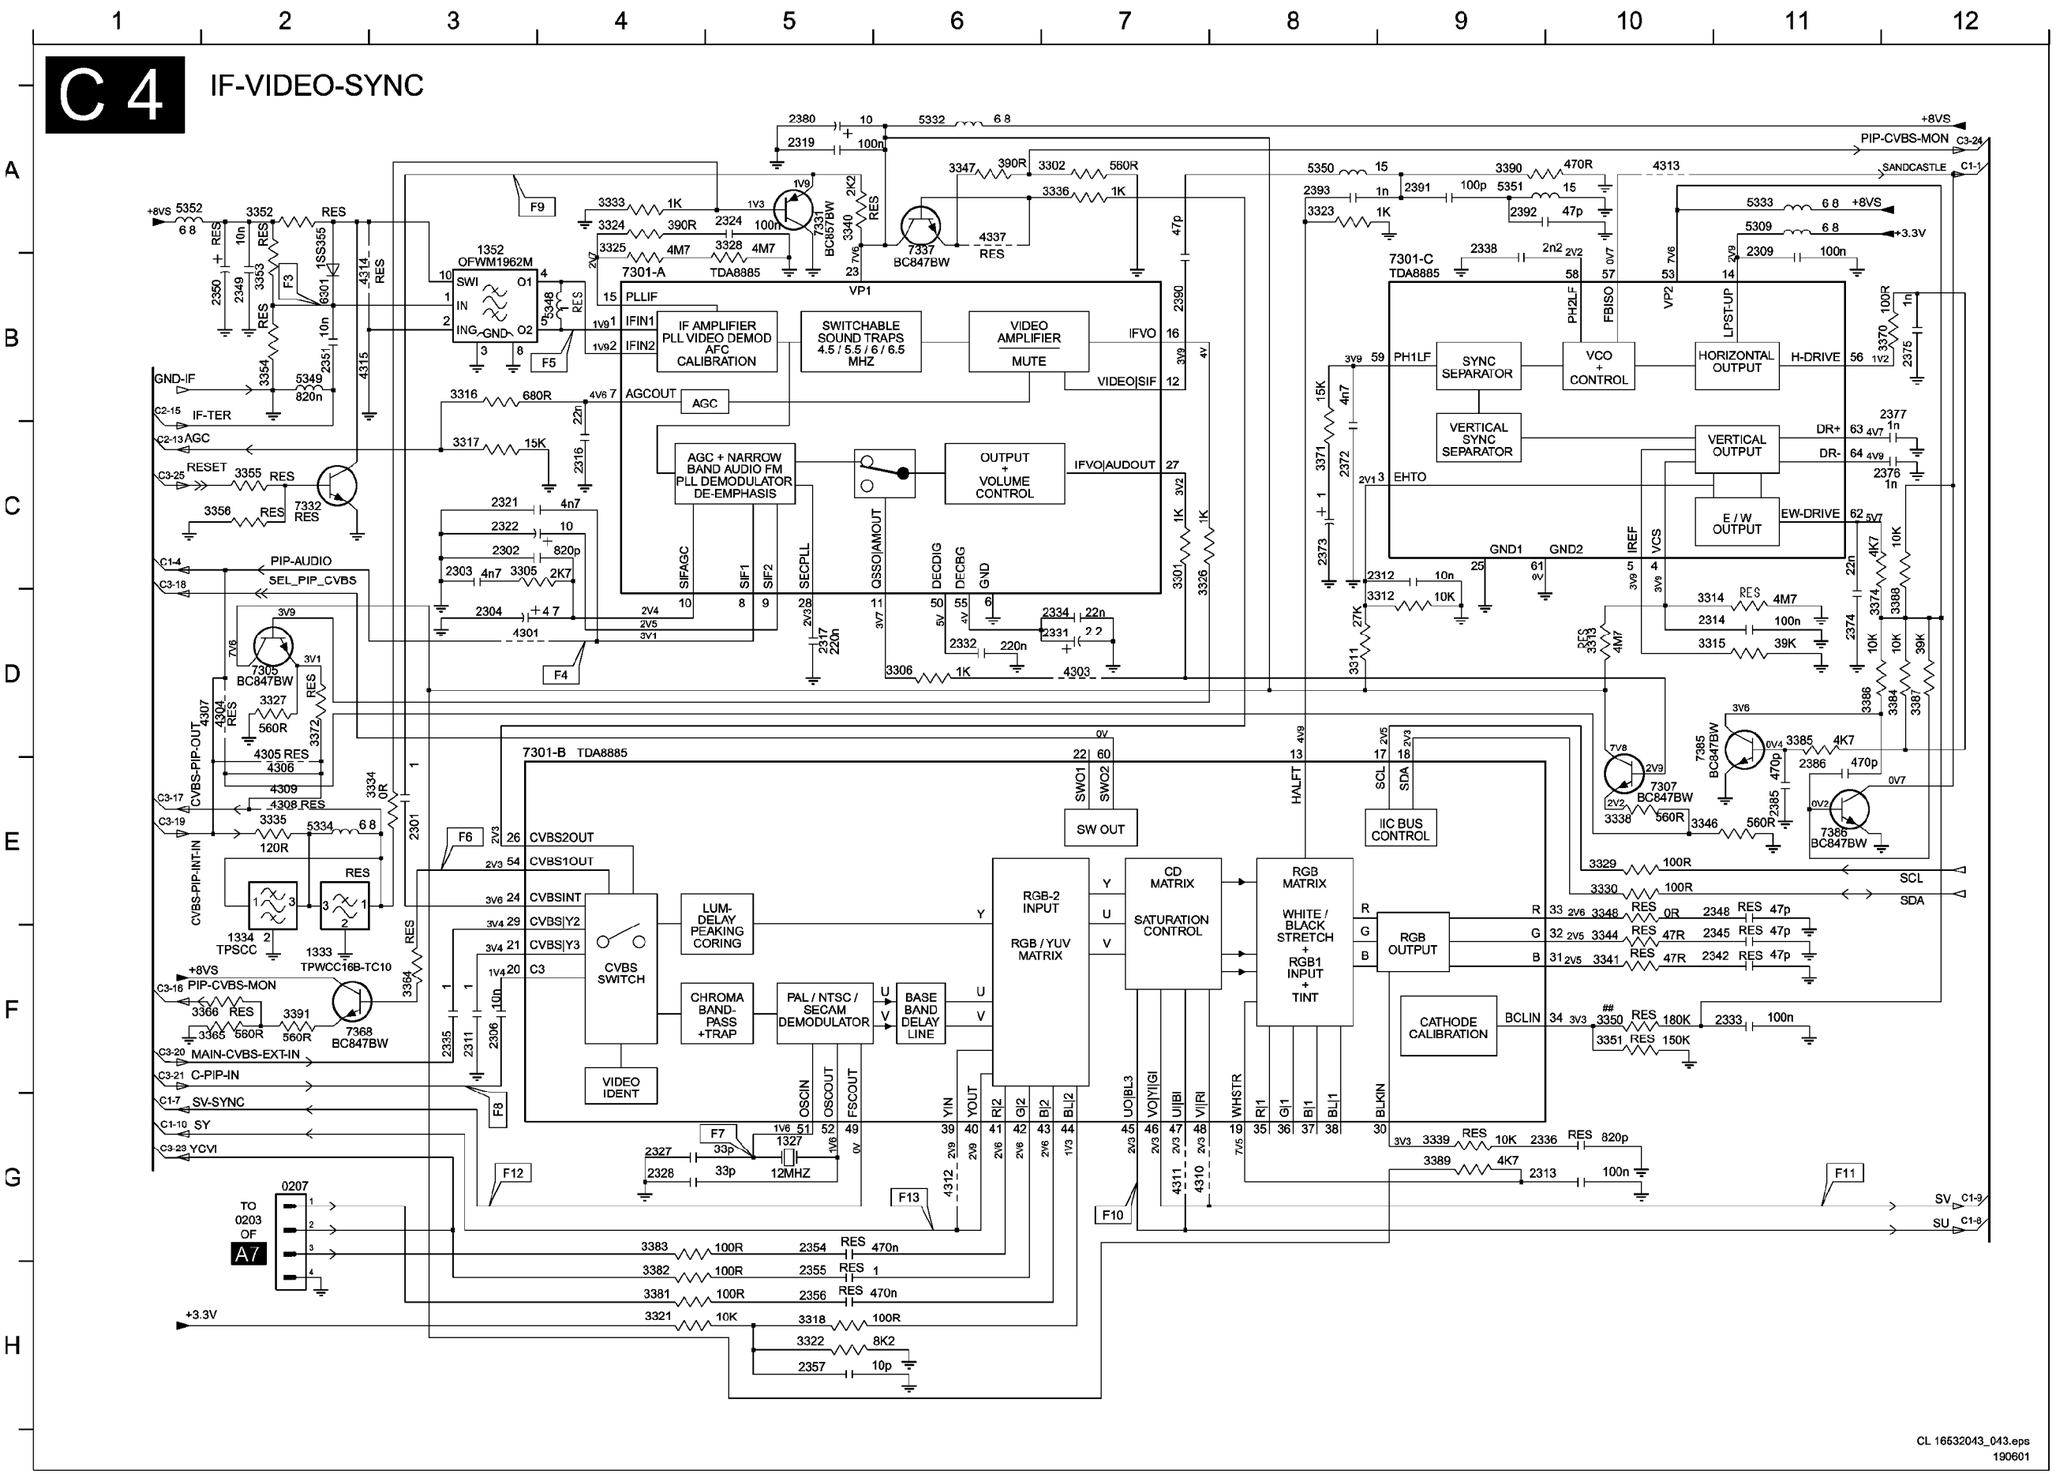

0207 G2	3301 C7	3386 D11
1327 G5	3302 A7	3387 D12
1333 F2	3305 C3	3388 D12
1334 F2	3306 D6	3389 G9
1352 B3	3311 D8	3390 A9
2301 E3	3312 D9	3391 F2
2302 C3	3313 D10	4301 D3
2303 C3	3314 D10	4303 D7
2304 D3	3315 D10	4304 D2
2306 F3	3316 B3	4305 D2
2309 B11	3317 C3	4306 E2
2311 F3	3318 H5	4307 D2
2312 C9	3321 H4	4308 E2
2313 G9	3322 H5	4309 E2
2314 D10	3323 A8	4310 G7
2316 C4	3324 A4	4311 G7
2317 D5	3325 A4	4312 G6
2319 A5	3326 C7	4313 A10
2321 C3	3327 D2	4314 B2
2322 C3	3328 A5	4315 B2
2324 A5	3329 E10	4337 A6
2327 G4	3330 E10	5309 A11
2328 G4	3333 A4	5332 A6
2331 D7	3334 E3	5333 A11
2332 D6	3335 E2	5334 E2
2333 F11	3336 A7	5348 B4
2334 D7	3338 E10	5349 B2
2335 F3	3339 G9	5350 A8
2336 G9	3340 A5	5351 A9
2338 A9	3341 F10	5352 A1
2342 F11	3344 F10	6301 B2
2345 F11	3346 E10	7301-A B4
2348 E11	3347 A6	7301-B D3
2349 B2	3348 E10	7301-C B9
2350 B2	3350 F10	7305 D2
2351 B2	3351 F10	7307 E10
2354 G5	3352 A2	7331 A5
2355 H5	3353 B2	7332 C2
2356 H5	3354 B2	7337 A6
2367 H6	3355 C2	7368 F3
2372 C8	3356 C2	7385 D10
2373 C8	3364 F3	7386 E11
2374 D11	3365 F2	
2375 B12	3366 F1	
2376 C12	3370 B12	
2377 B12	3371 C8	
2380 A5	3372 D2	
2365 E11	3374 D11	
2386 E11	3381 H4	
2390 B7	3382 H4	
2391 A9	3383 G4	
2392 A9	3384 D12	
2393 A8	3385 D11	

Diversit y Table C4	
1333	-
1334	4MHZ5 FILTER
1352	45MHZ75 OFWM1962M L
2311	1U
2321	4N7
2349	-
2350	-
2392	47P
2393	1N
3302	560R
3333	1K
3334	JMP
3335	120R
3336	1K
3338	390R
3347	390R
3352	-
3353	-
3354	-
3355	-
3356	-
3364	1K
3365	1K
3372	-
4301	x
4304	-
4305	-
4306	x
4308	-
4309	x
4314	-
4315	x
5334	x
5352	-
6301	-
7301	C SM TDA8887H/N1 (PHSE) Y
7332	-
7337	x
7368	x

1501 B1
2501 A1
2502 B1
2503 B1
2504 C1
2505 C1
2506 B3
2507 A4
2508 C1
2509 C1
2511 B4
3501 A2
3502 A1
3503 B1
3504 C1
3506 B3
3507 A4
3508 B1
3509 A3
3510 A3
5501 B3
7501 A2

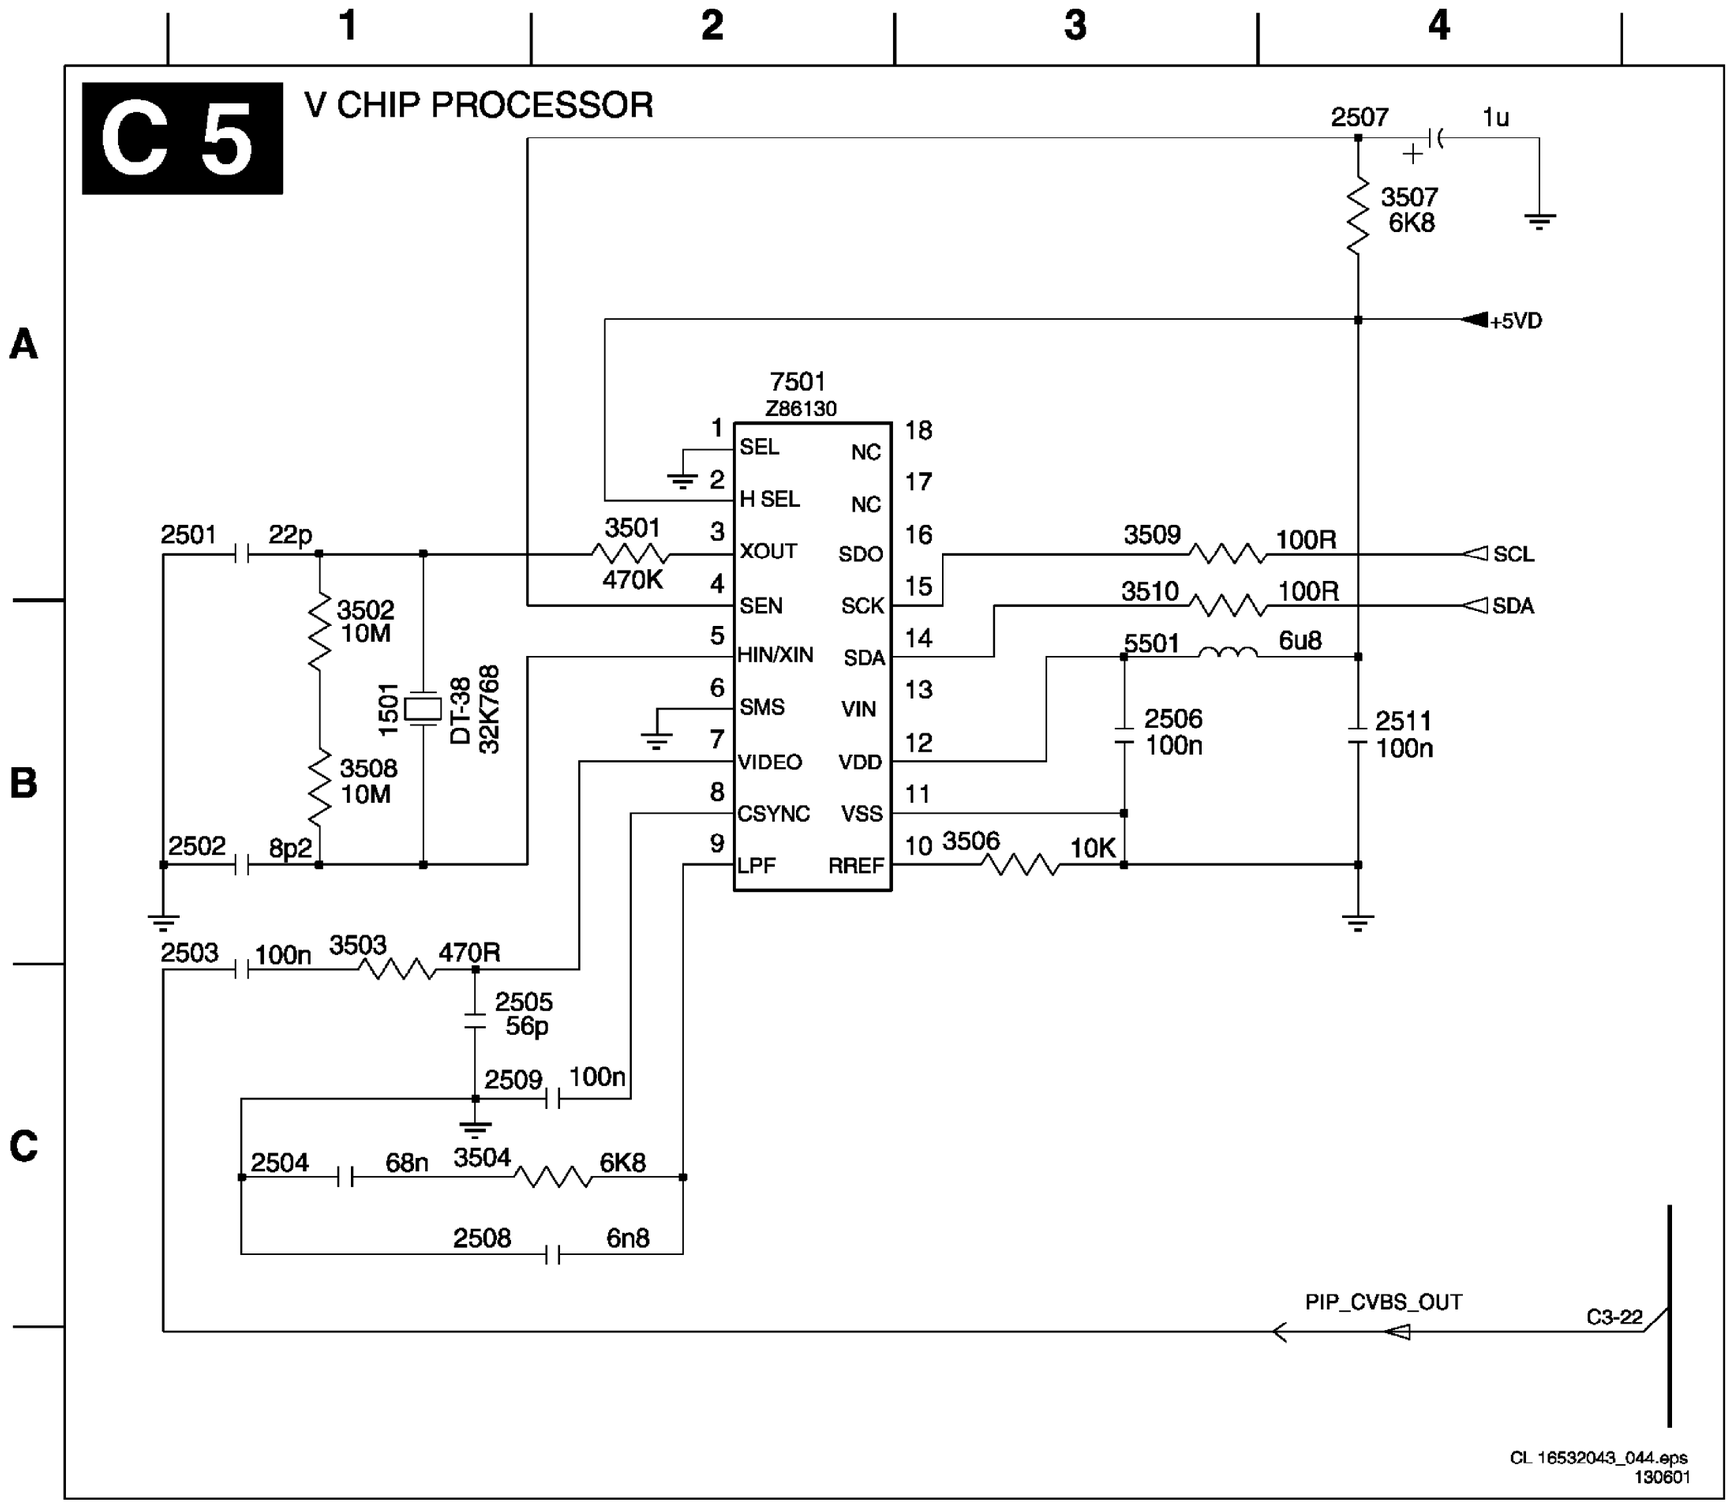

USED ONLY IN MODELS: 55PP950201, 55PP950217, 55PP950201, 55PP950217, 60PP9502/17, 60PP950201, 60PP9502/17, 60PP950201, 55PP9502/84, 55PP9502/84 (7621) - DVI Panel Schematic
51PW9303/17F, 51PW9303/17F, 55PP9363H17, 55PW936317F, 55PP9363H17, 55PW936317F, 55PW9383/17F, 55RW9515/35, 55PW9383/17F, 55RW9515/35, 60PP9363H17, 60PW936317F, 60PP9363H17, 60PW936317F, 60PP938317F,

DVI PANEL SCHEMATIC

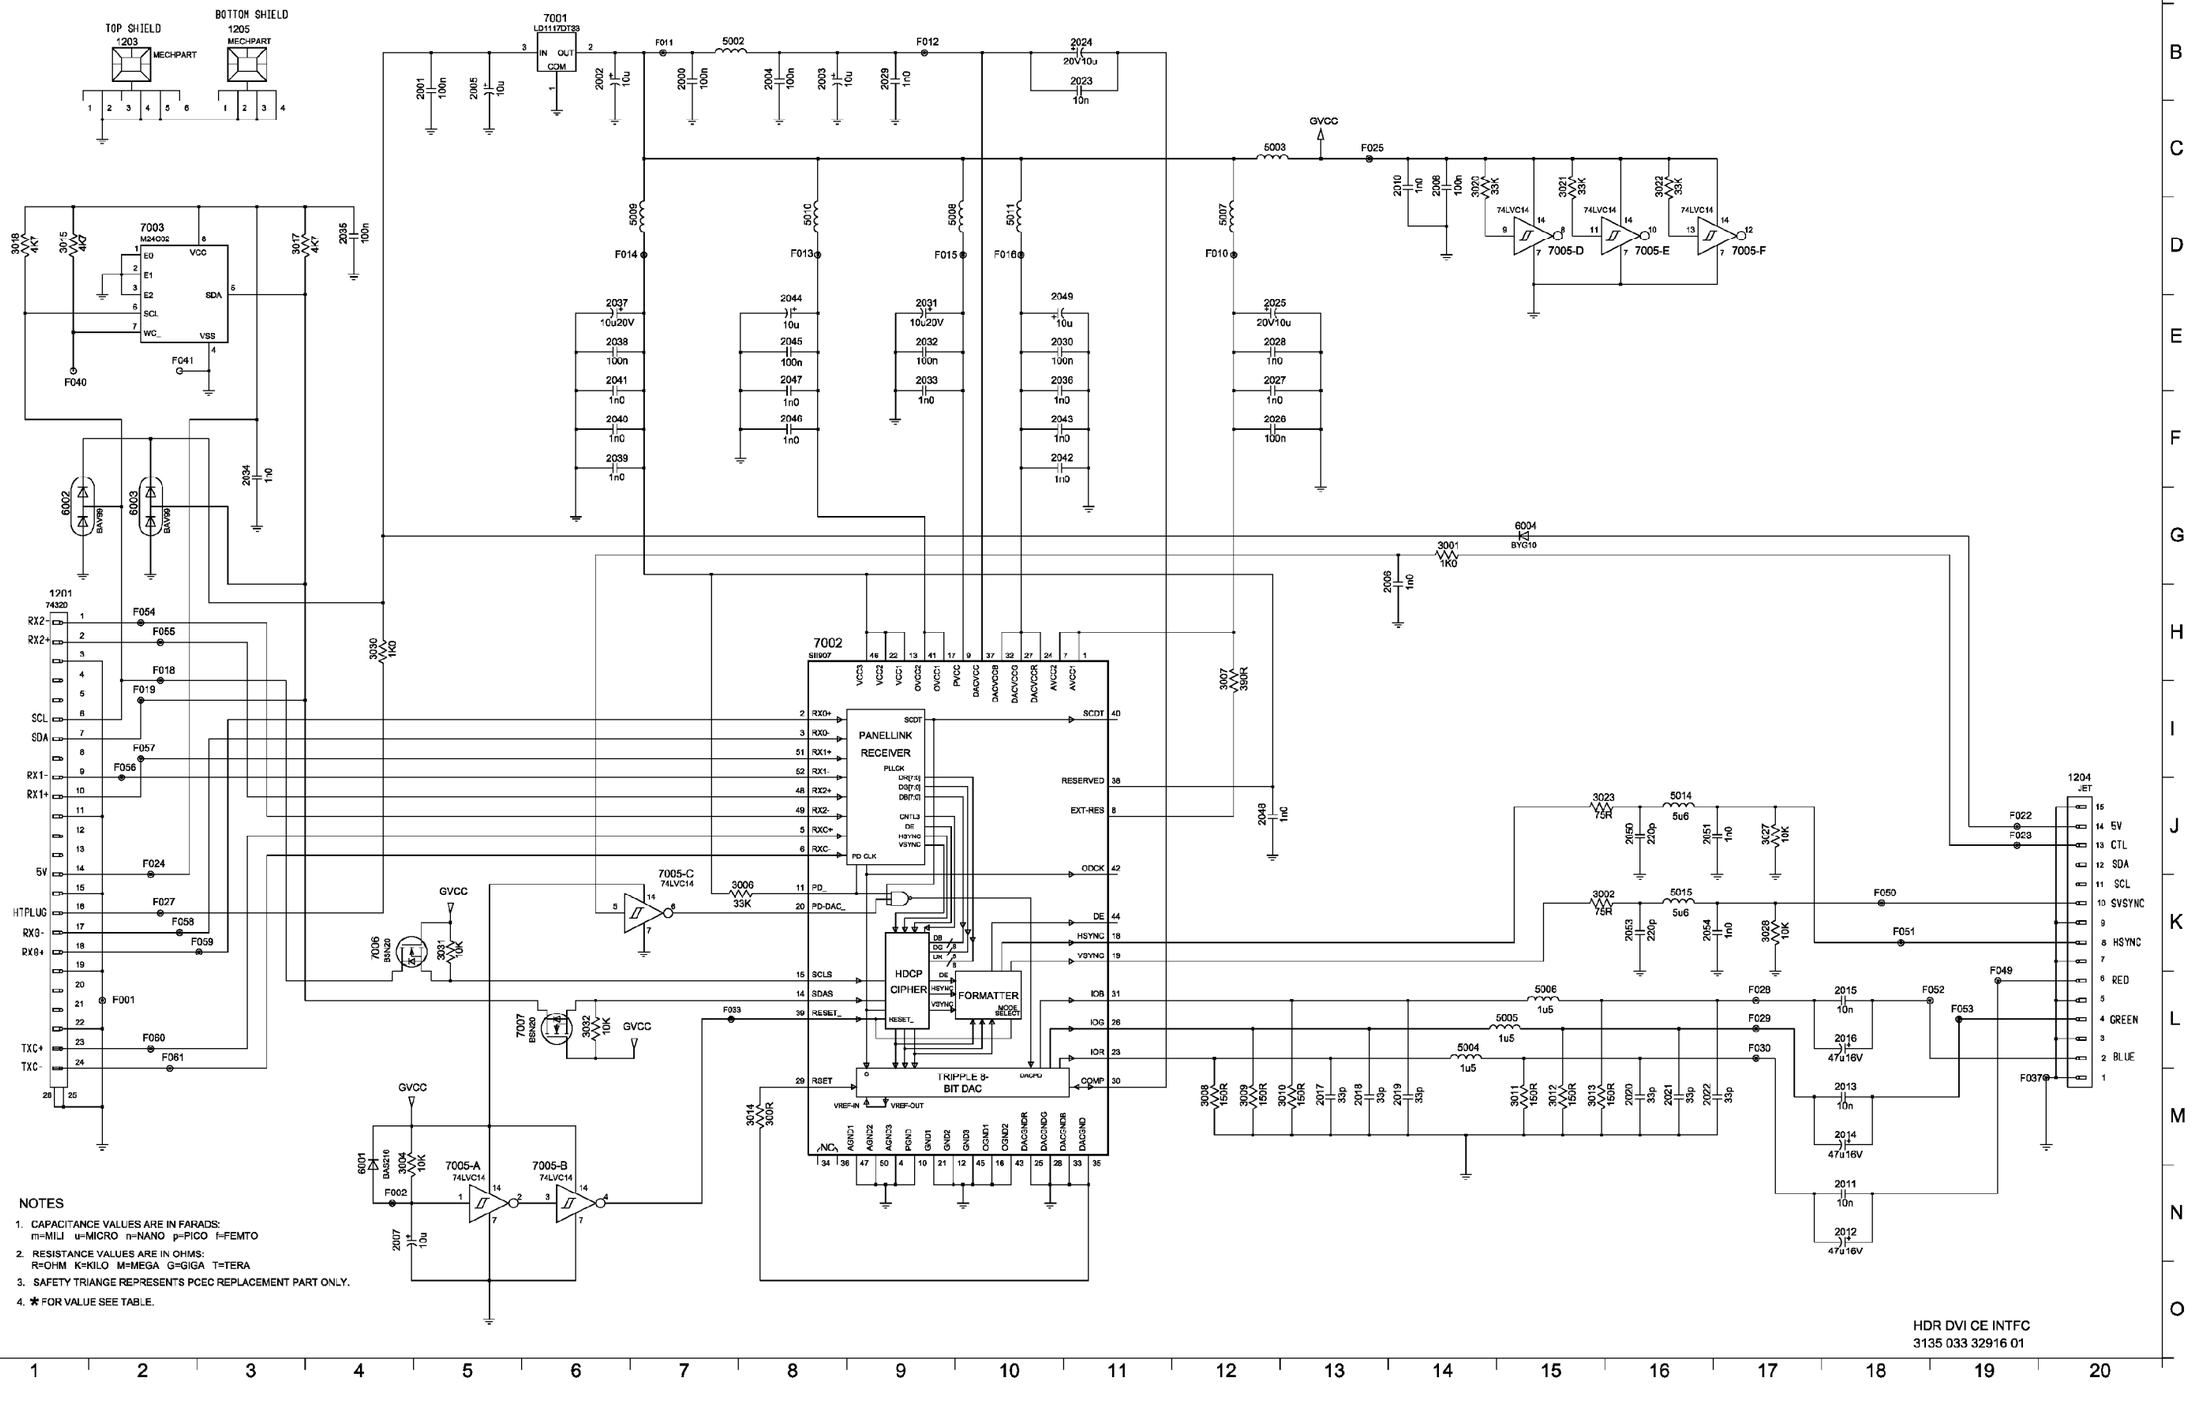
TOP SHIELD
1203
MECHPART
BOTTOM SHIELD
1205
MECHPART
7001
LD1117DT33
IN
OUT
COM
7003
M24C02
VCC
SDA
SCL
WC_
VSS
E0
E1
E2
7002
SII907
PANELLINK
RECEIVER
PLLCK
CNTL3
DE
HSYNC
VSYNC
PD CLK
RX0+
RX0-
RX1+
RX1-
RX2+
RX2-
RXC+
RXC-
SCDT
RESERVED
EXT-RES
ODCK
DE
HSYNC
VSYNC
IOB
IOG
IOR
COMP
PD_
PD-DAC_
SCLS
SDAS
RESET_
HDCP
CIPHER
FORMATTER
MODE SELECT
TRIPPLE 8-
BIT DAC
VREF-IN
VREF-OUT
7005-A
7005-B
7005-C
7005-D
7005-E
7005-F
74LVC14
1201
74320
1204
JET
GVCC
F001
F002
F018
F019
F022
F023
F024
F025
F027
F028
F029
F030
F033
F037
F040
F041
F048
F049
F050
F051
F052
F053
F054
F055
F056
F057
F058
F059
F060
F061
SCL
SDA
RX1-
RX1+
5V
HTPLUG
RX0-
RX0+
TXC+
TXC-
6002
6003
6004
6006
6007
BAV99
BYG10
BSN20
BAS216
3001
1K0
3002
75R
3003
75R
3004
10K
3006
33K
3007
350R
3008
150R
3009
150R
3010
150R
3011
150R
3012
150R
3013
150R
3014
300R
3023
75R
3027
10K
3028
10K
3030
1K0
3032
10K
3036
1K0
5002
5003
5004
1u5
5005
1u5
5006
1u5
5007
5008
5009
5010
5011
5014
5u6
5015
5u6
2001
100n
2002
10u
2003
10u
2004
100n
2005
10u
2006
1n0
2007
10u
2008
100n
2010
1n0
2011
10n
2012
47u16V
2013
10n
2014
47u16V
2015
10n
2016
47u16V
2017
33p
2018
33p
2019
33p
2020
100n
2021
33p
2022
33p
2023
10n
2024
20V10u
2025
20V10u
2026
100n
2027
1n0
2028
1n0
2029
1n0
2030
100n
2031
10u20V
2032
100n
2033
1n0
2034
1n0
2036
1n0
2037
10u20V
2038
100n
2039
1n0
2040
1n0
2041
1n0
2042
1n0
2043
1n0
2044
10u
2045
100n
2046
1n0
2047
1n0
2048
1n0
2049
20V10u
2050
220p
2051
1n0
2053
220p
2054
1n0
2055
100n
2056
100n
2057
100n
2058
100n
2059
100n
2060
100n
2061
100n
2062
100n
2063
100n
2064
100n
2065
100n
2066
100n
2067
100n
2068
100n
2069
100n
2070
100n
2071
100n
2072
100n
2073
100n
2074
100n

USED ONLY IN MODELS: 55PP950201, 55PP950217, 55PP950201, 55PP950217, 60PP9502/17, 60PP950201, 60PP9502/17, 60PP950201, 55PP9502/84, 55PP9502/84 (7621) - Rear Switch Panel Schematic
55PW9383/17F, 55RW9515/35, 55PW9383/17F, 55RW9515/35, 60PP938317F, 60PW938317F, 60PP938317F, 60PW938317F

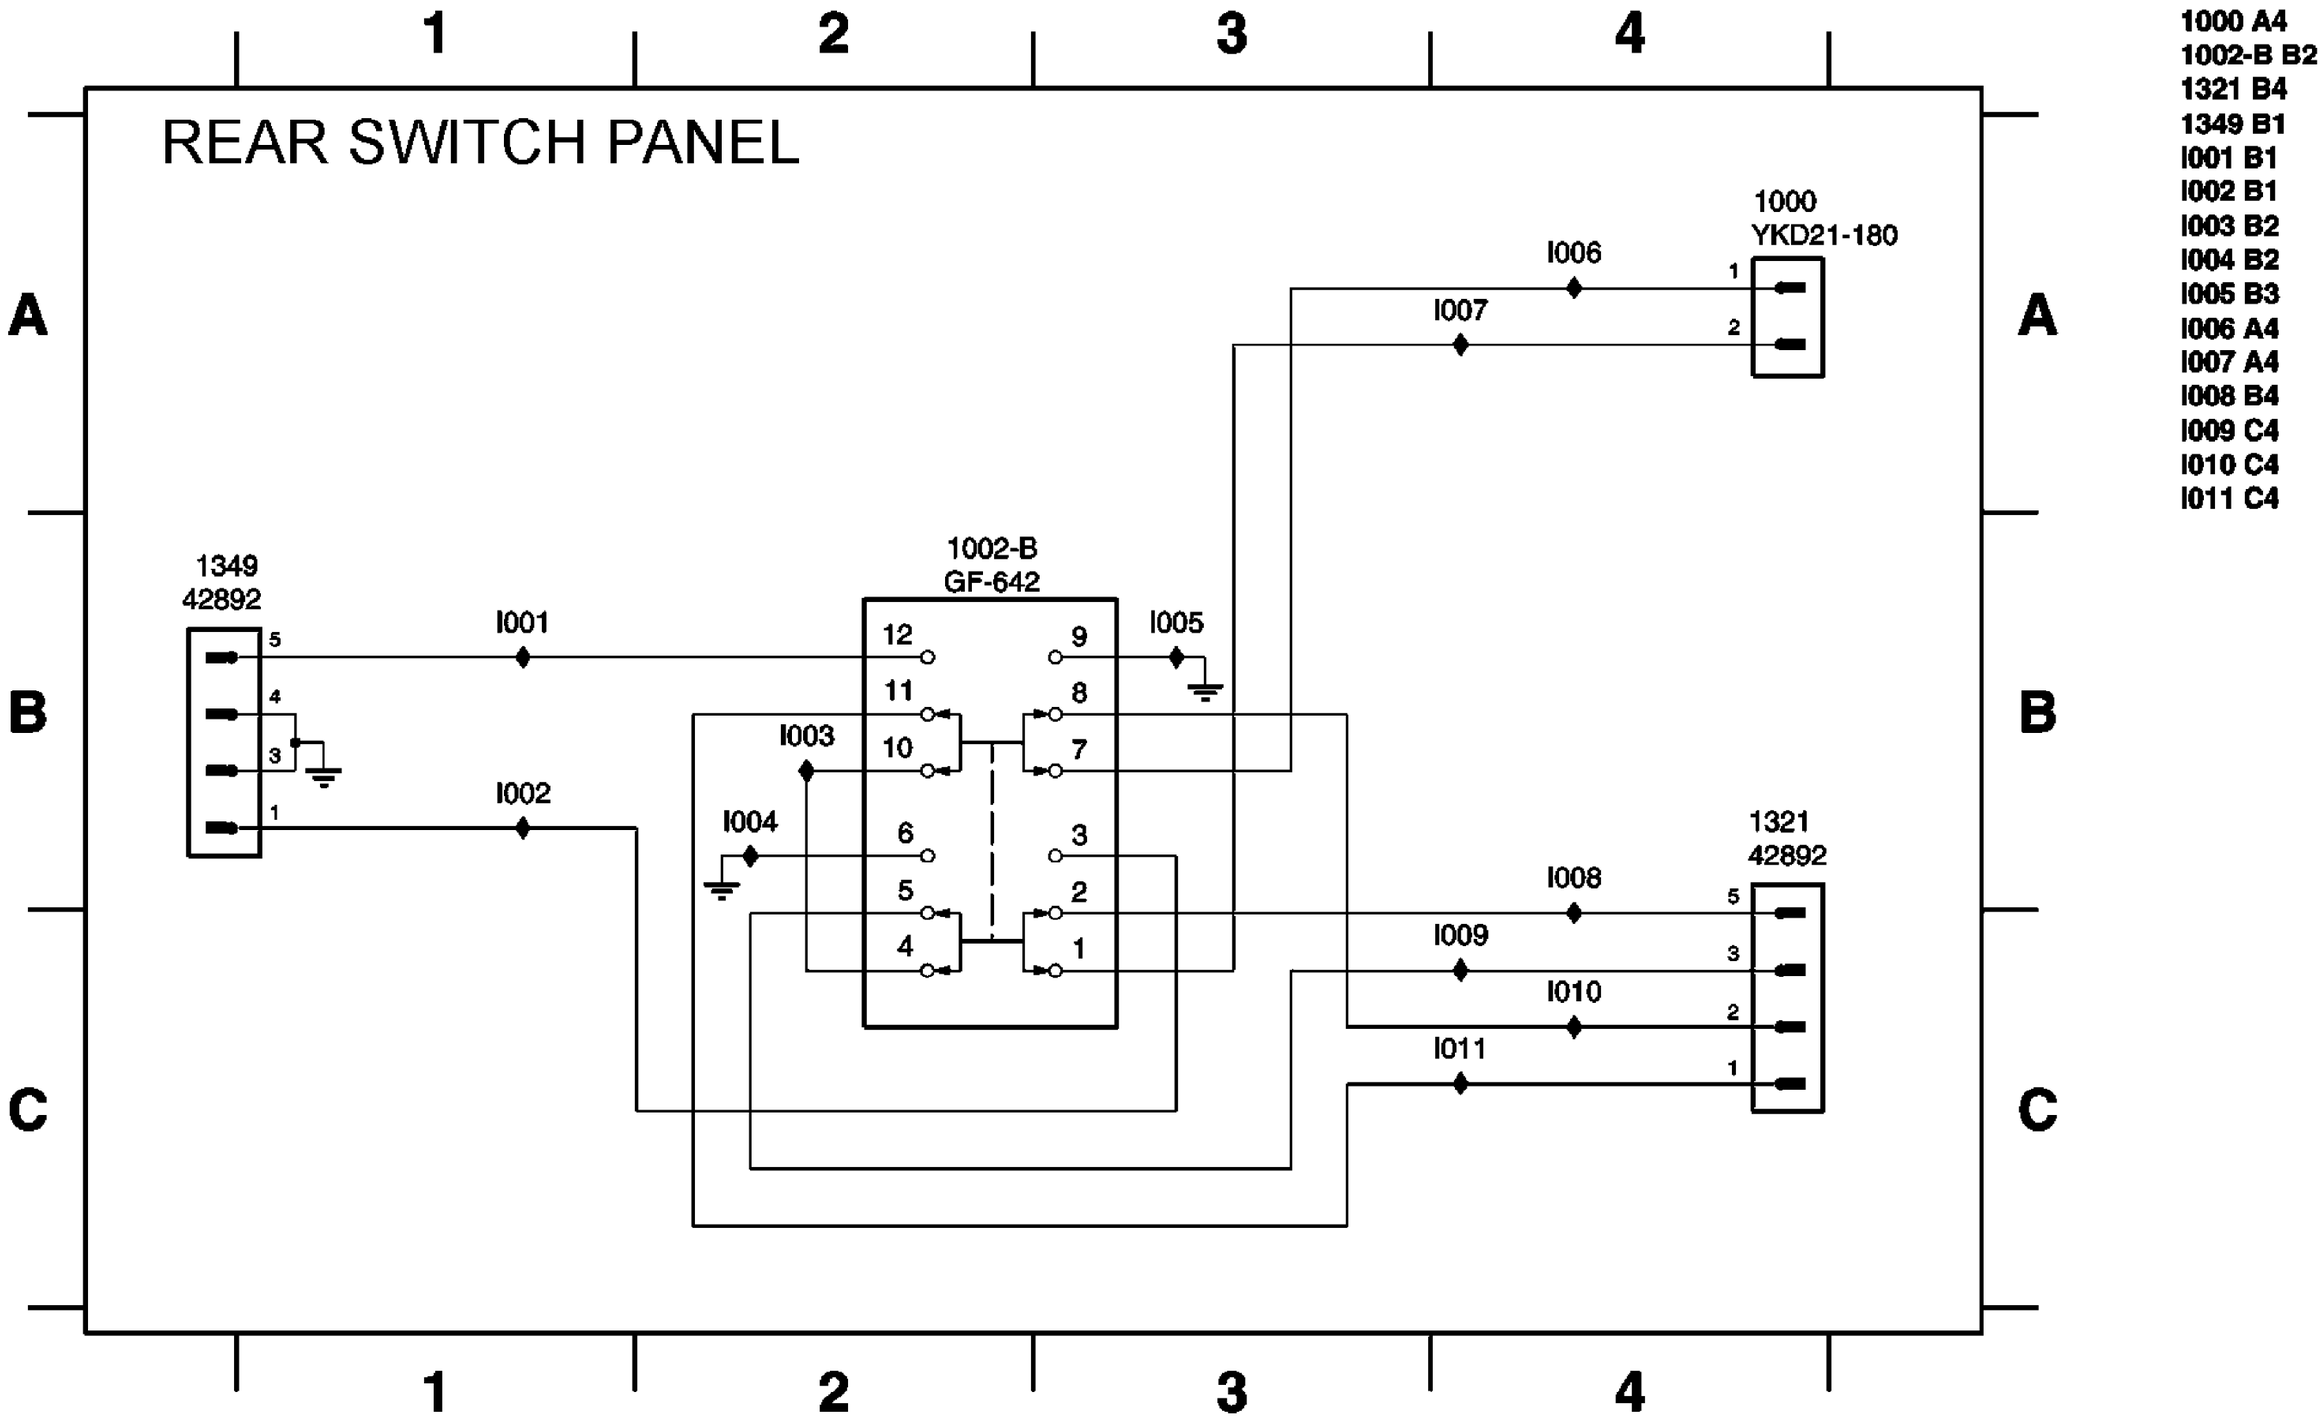

1000 A4
1002-B B2
1321 B4
1349 B1
I001 B1
I002 B1
I003 B2
I004 B2
I005 B3
I006 A4
I007 A4
I008 B4
I009 C4
I010 C4
I011 C4

All Models (7621) - Power Supply Panel CBA (Top View)

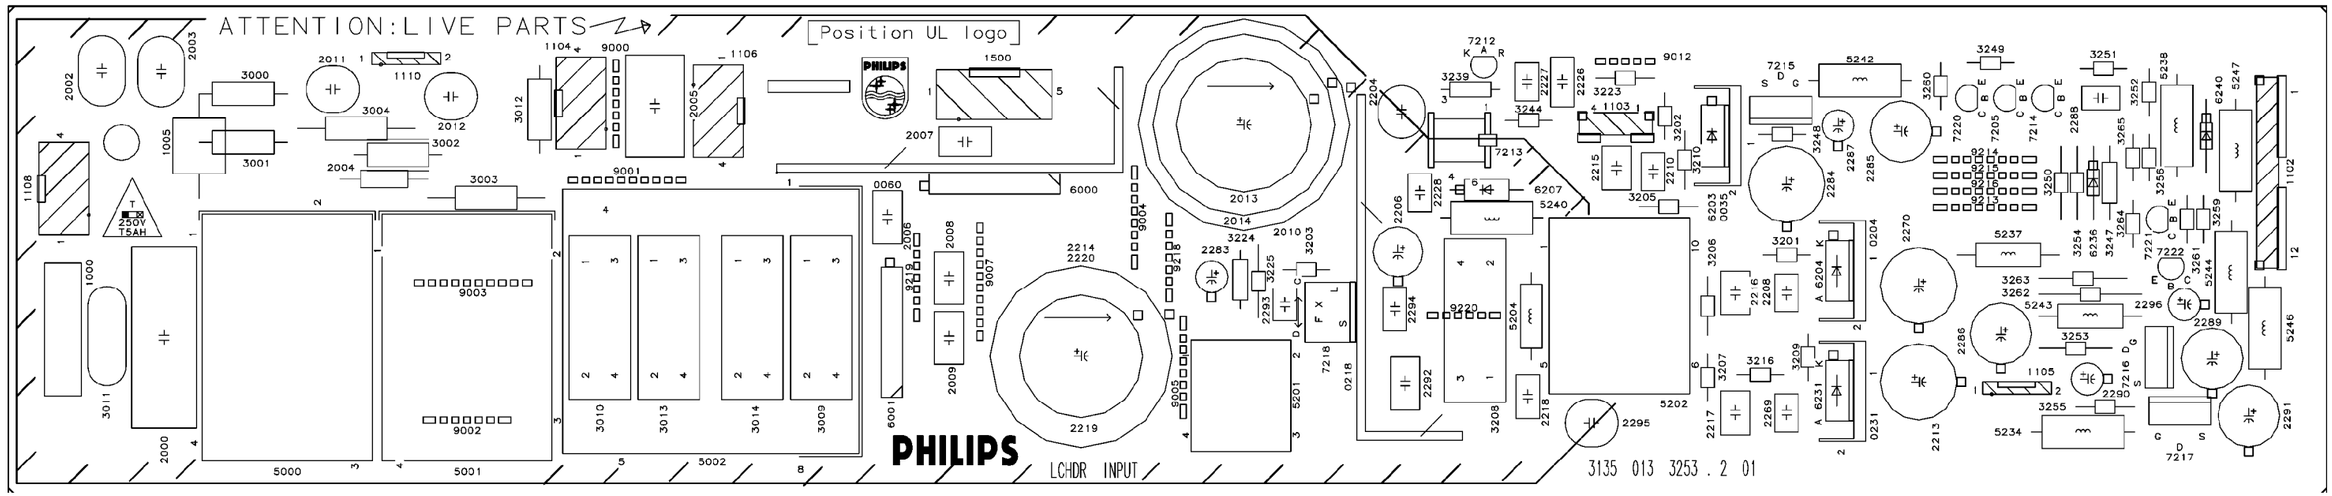

All Models (7621) - Power Supply Panel CBA (Bottom View)

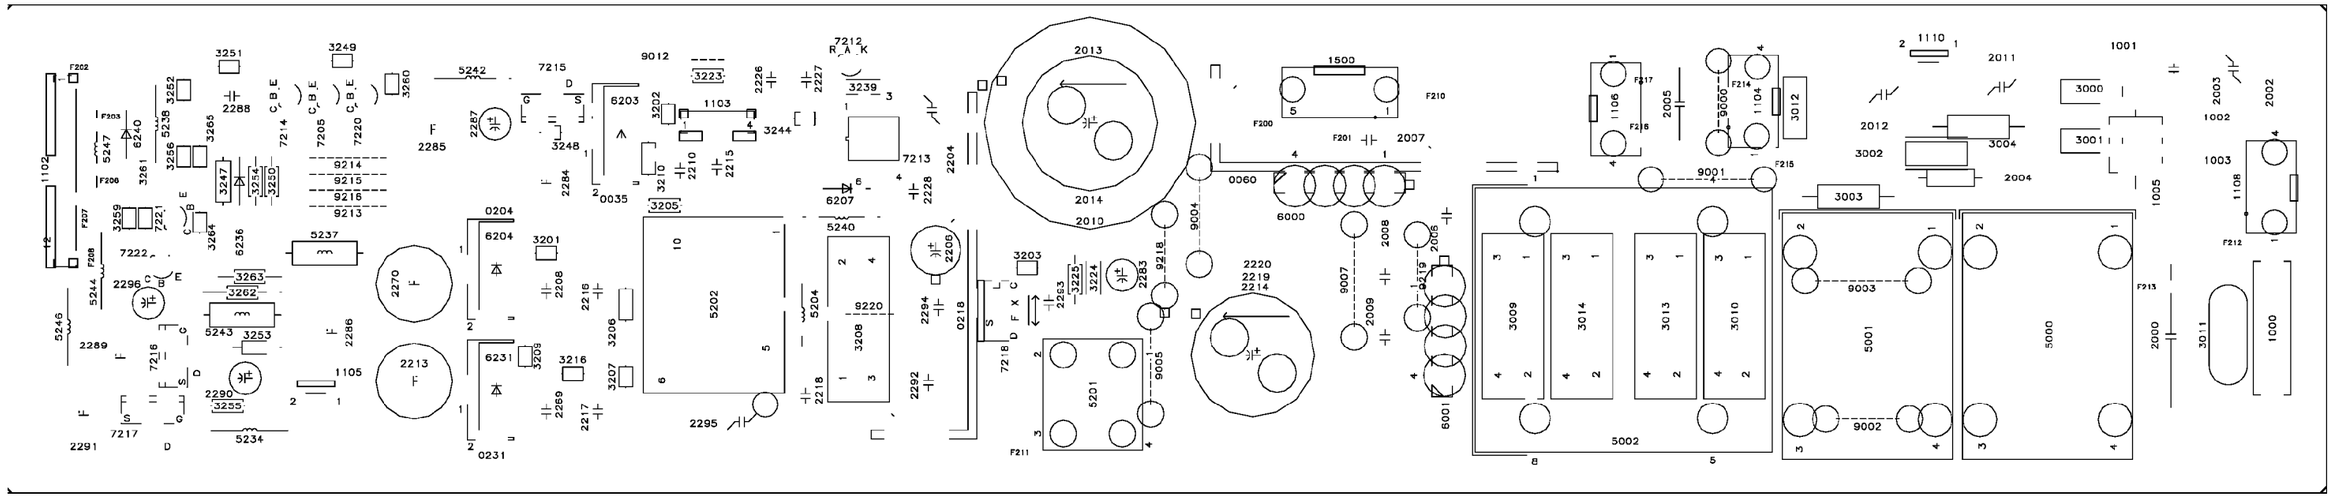

All Models (7621) - LSB Panel CBA (Top View)

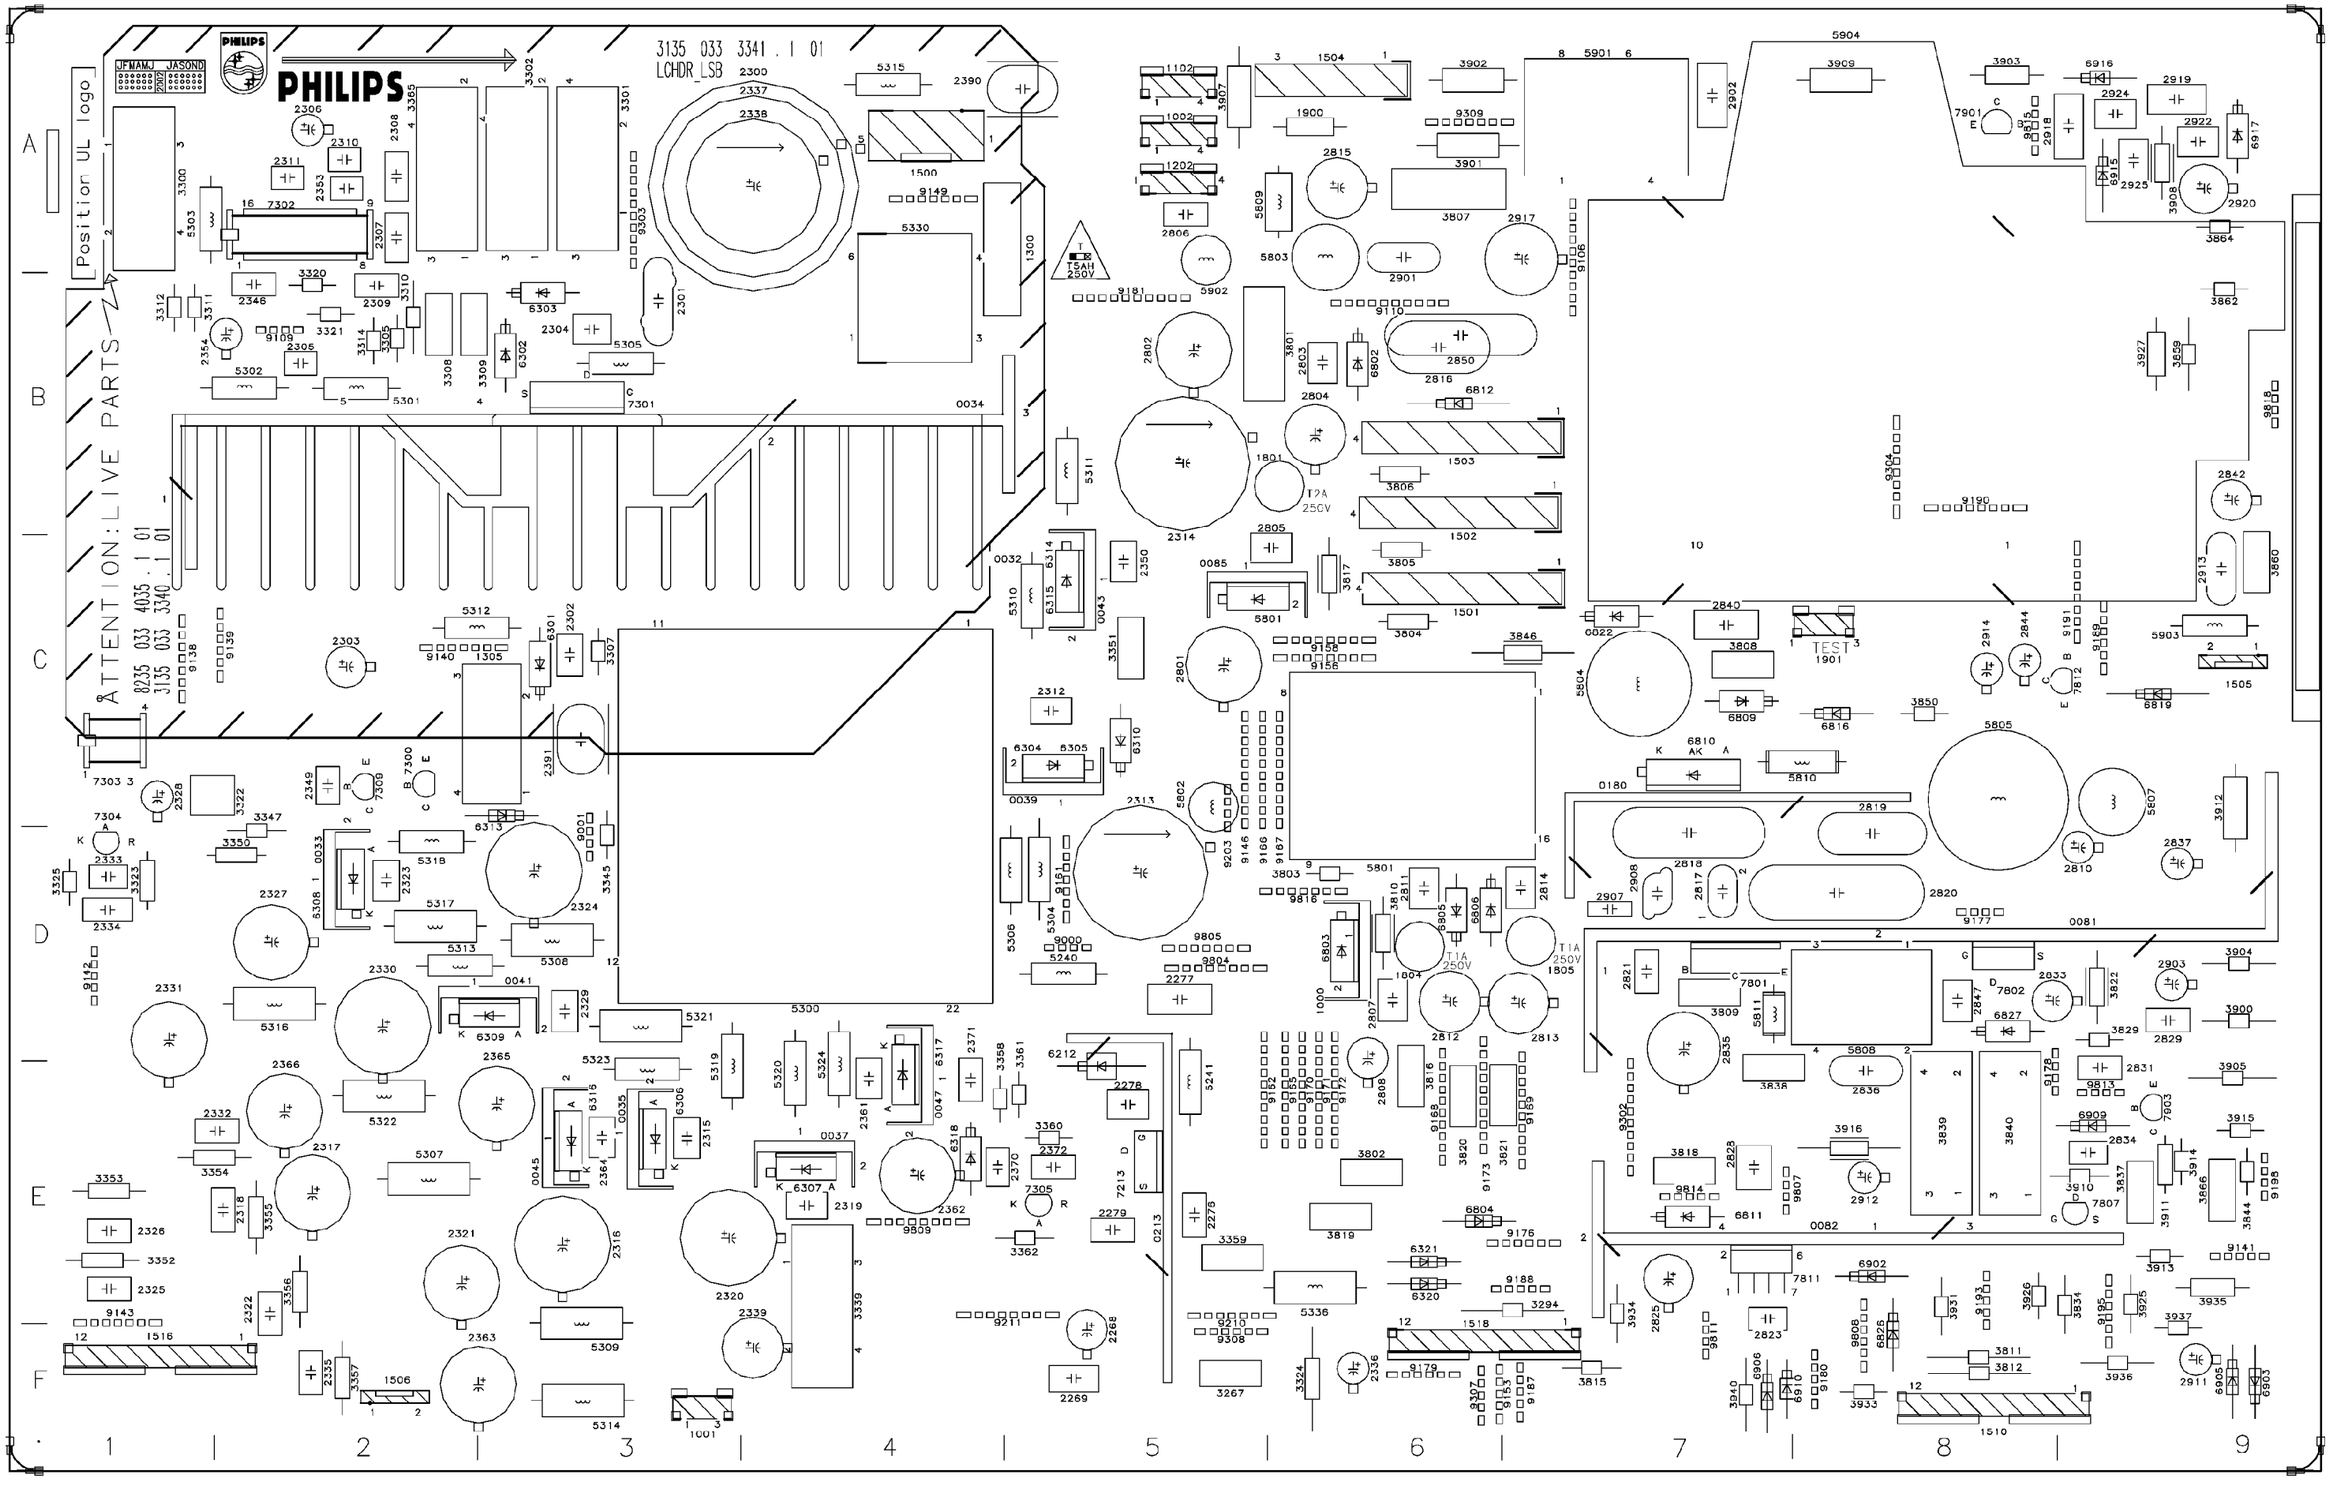

All Models (7621) - LSB Panel CBA (Bottom View)

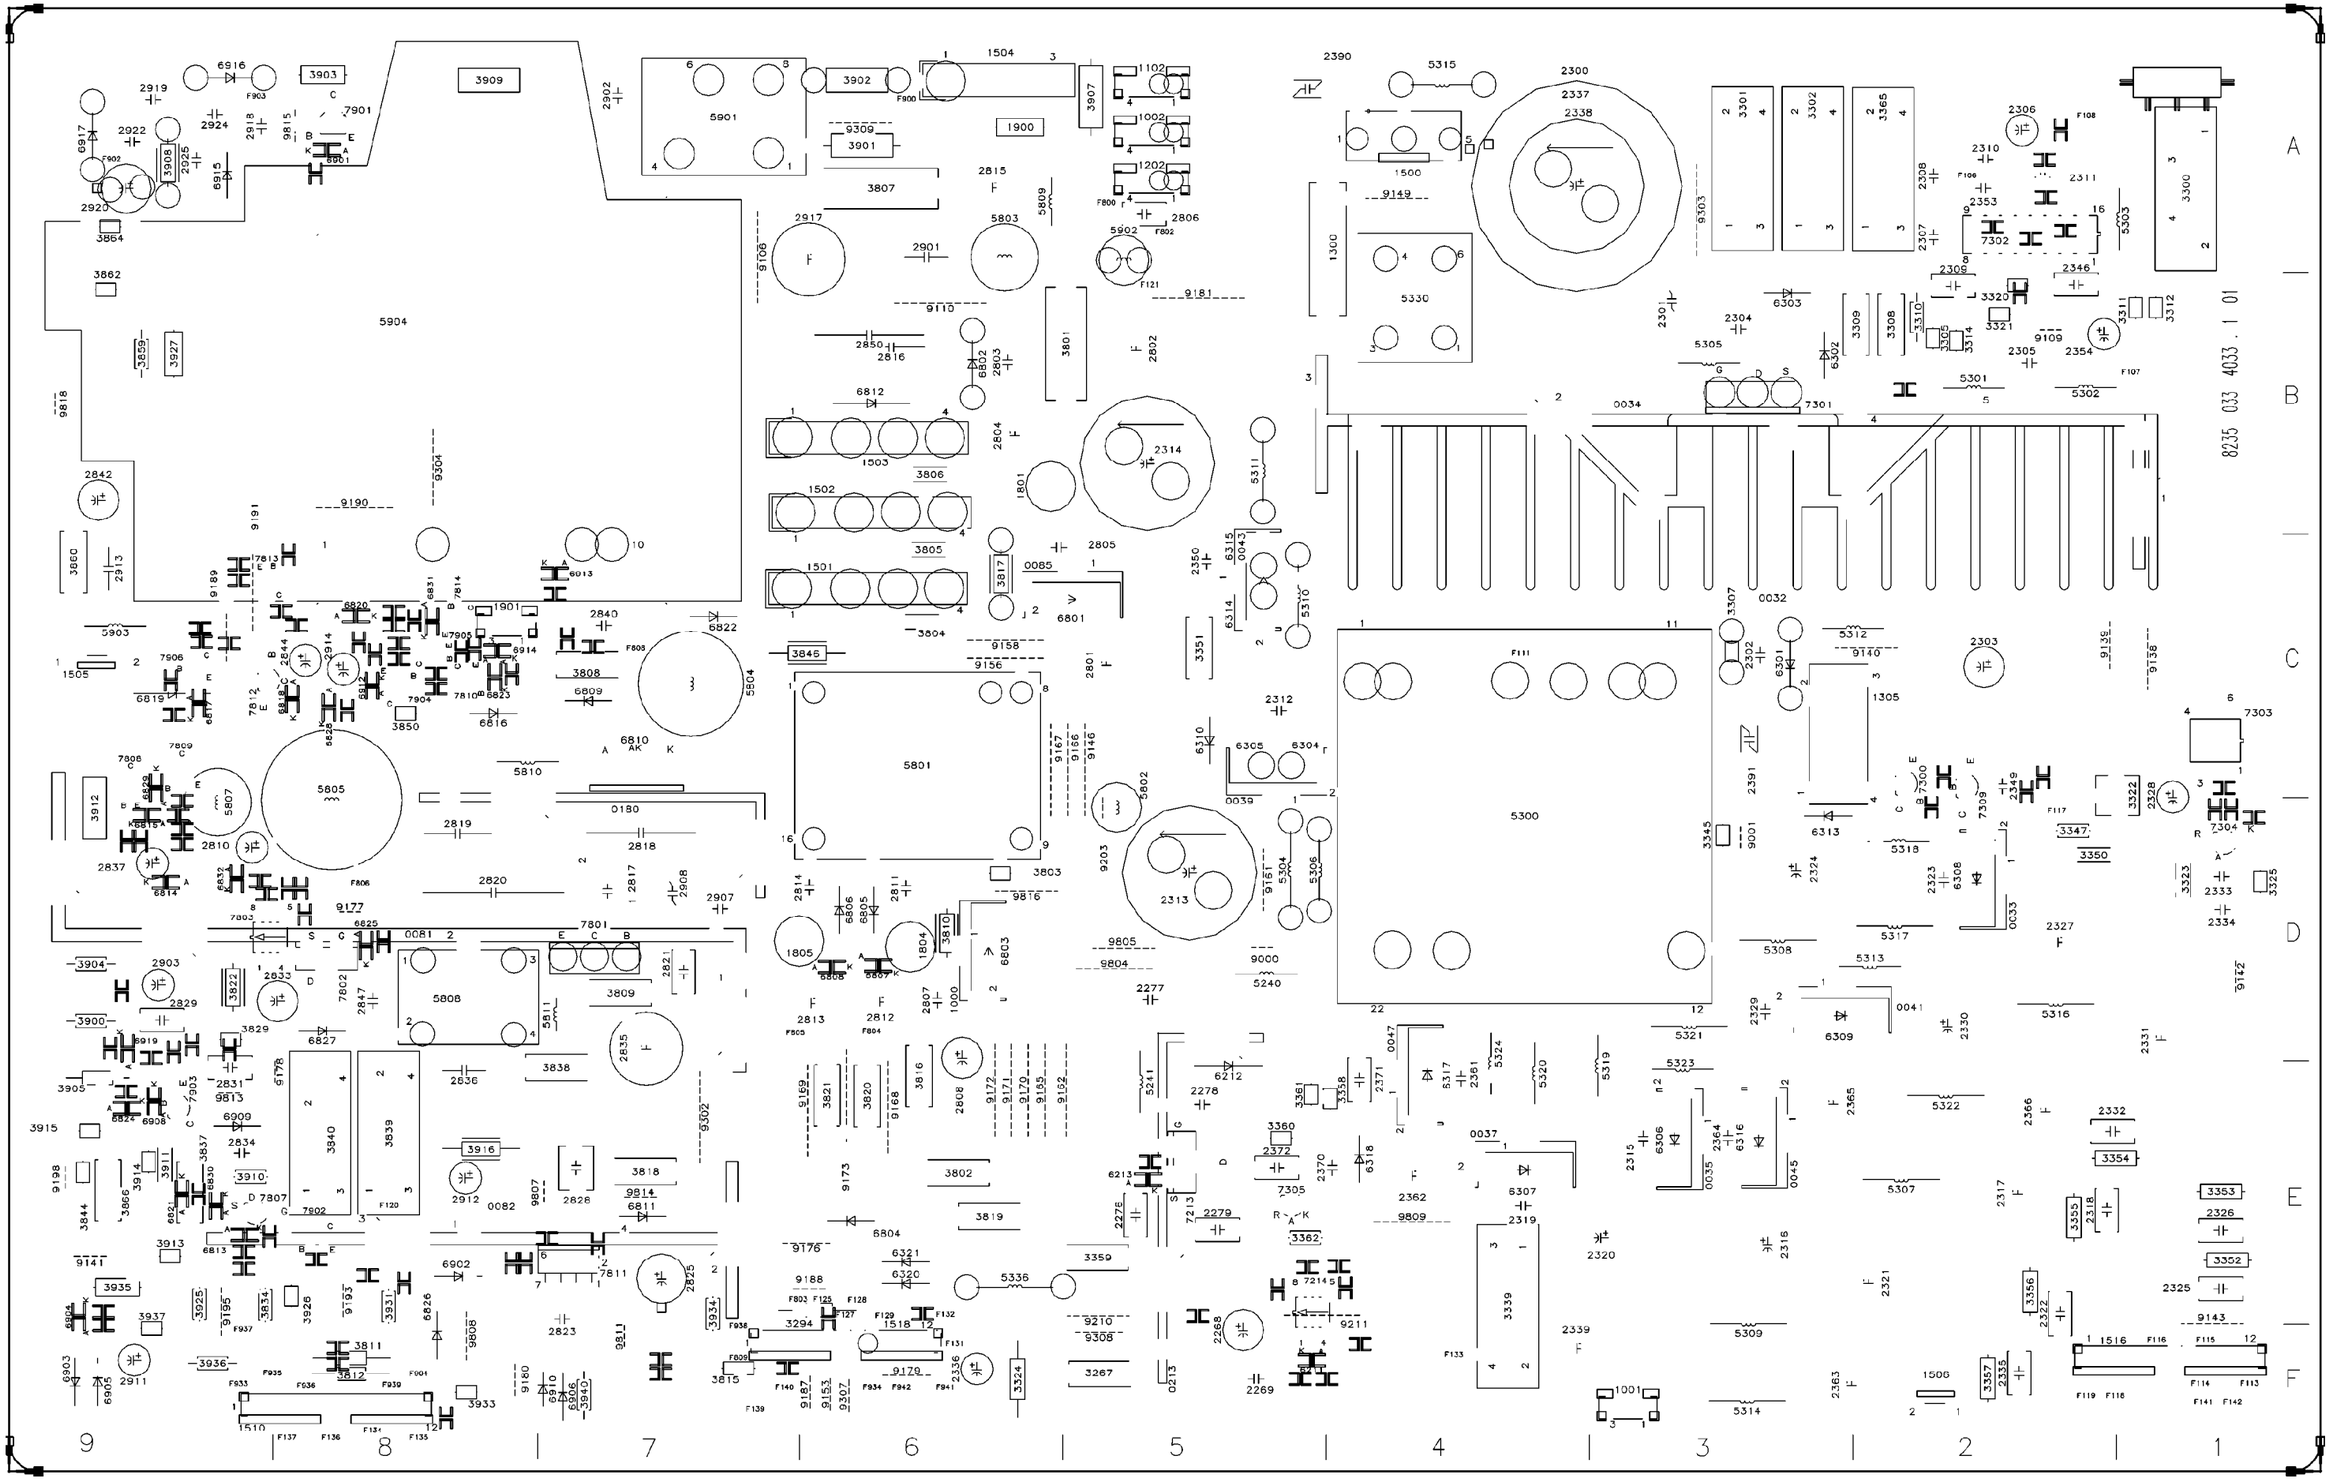

All Models (7621) - SSM Panel CBA (Top View)

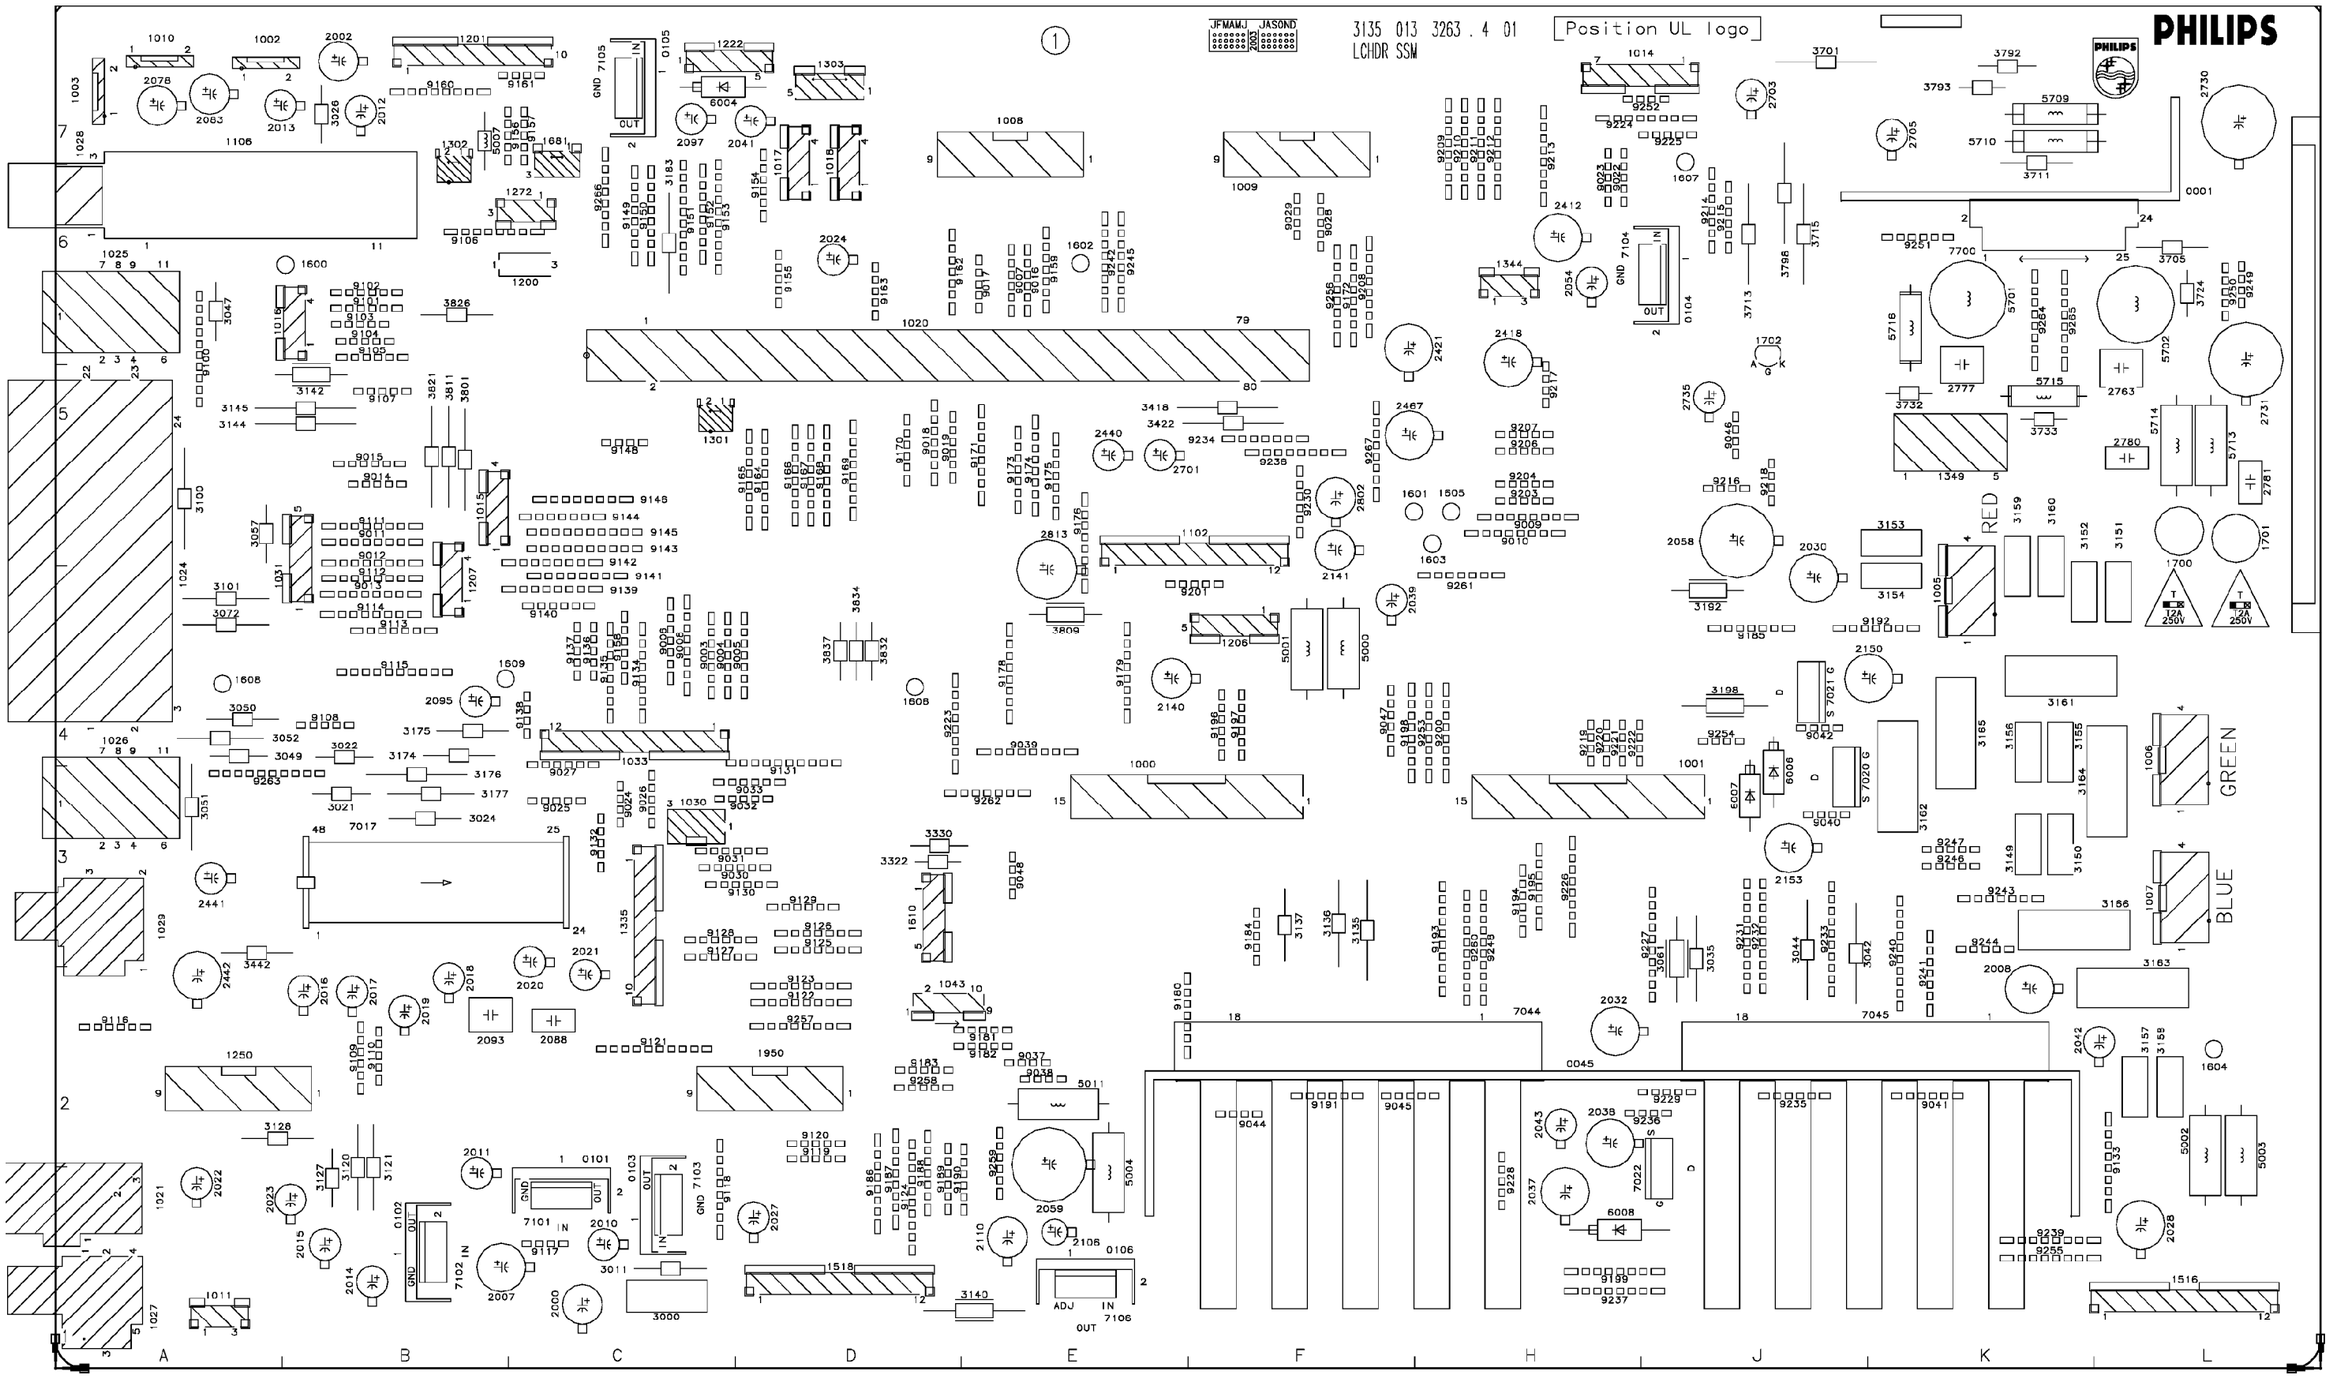

All Models (7621) - SSM Panel CBA (Bottom View)

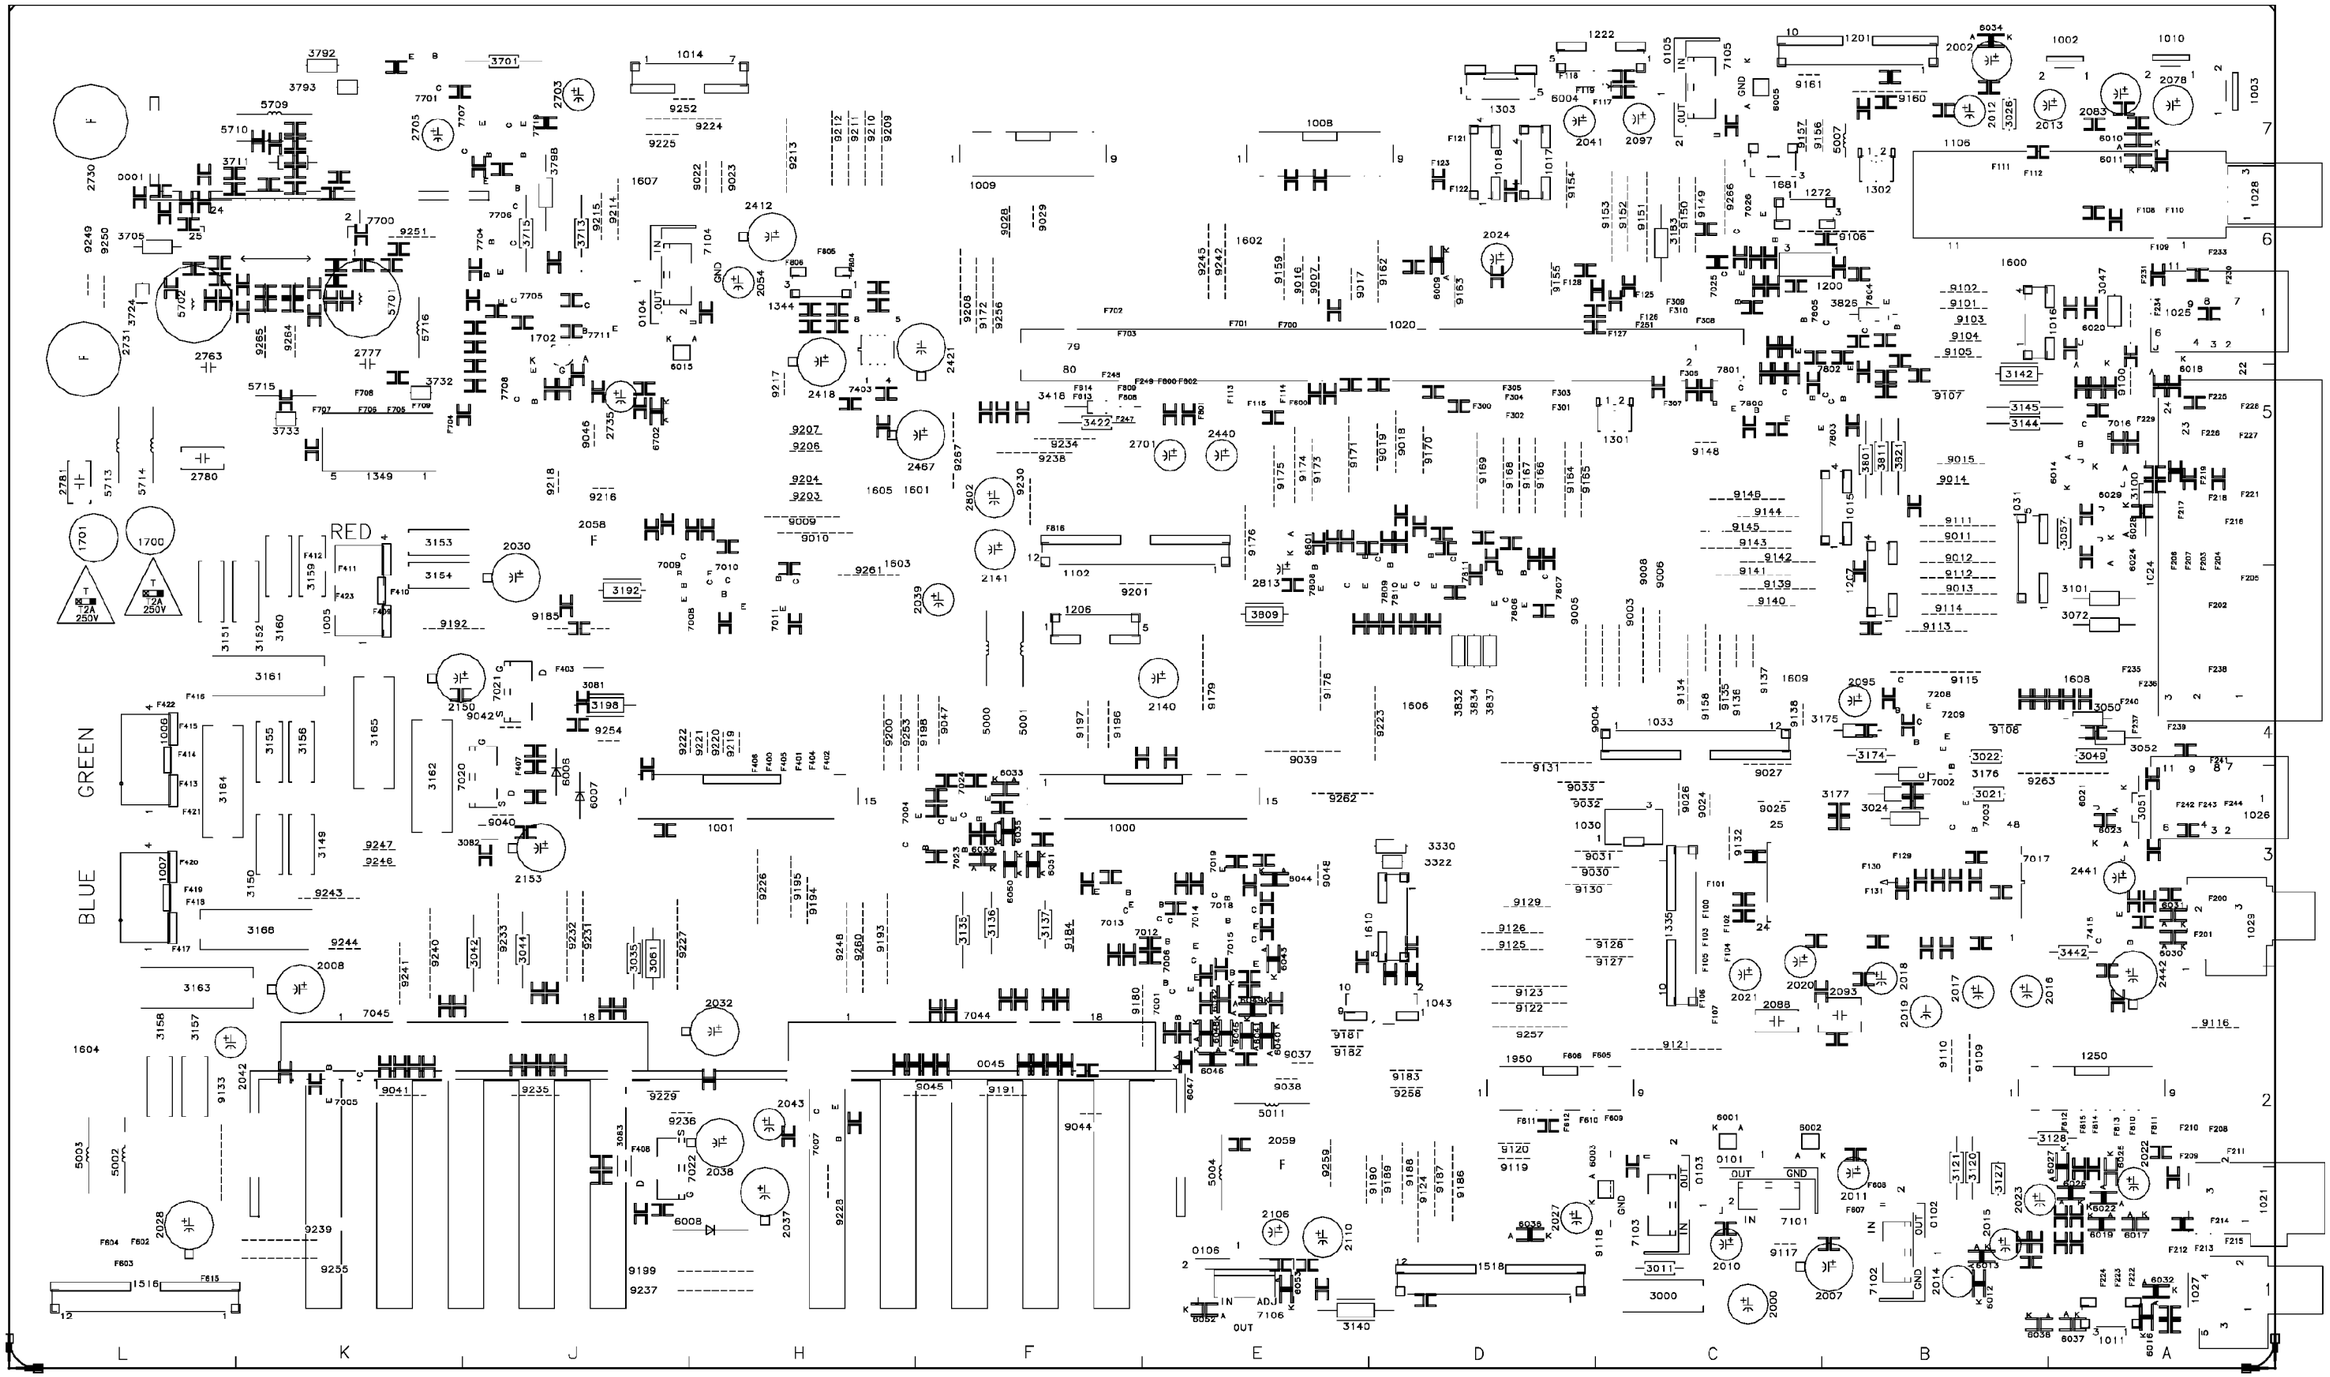

All Models (7621) - SSB Module CBA (Top View)

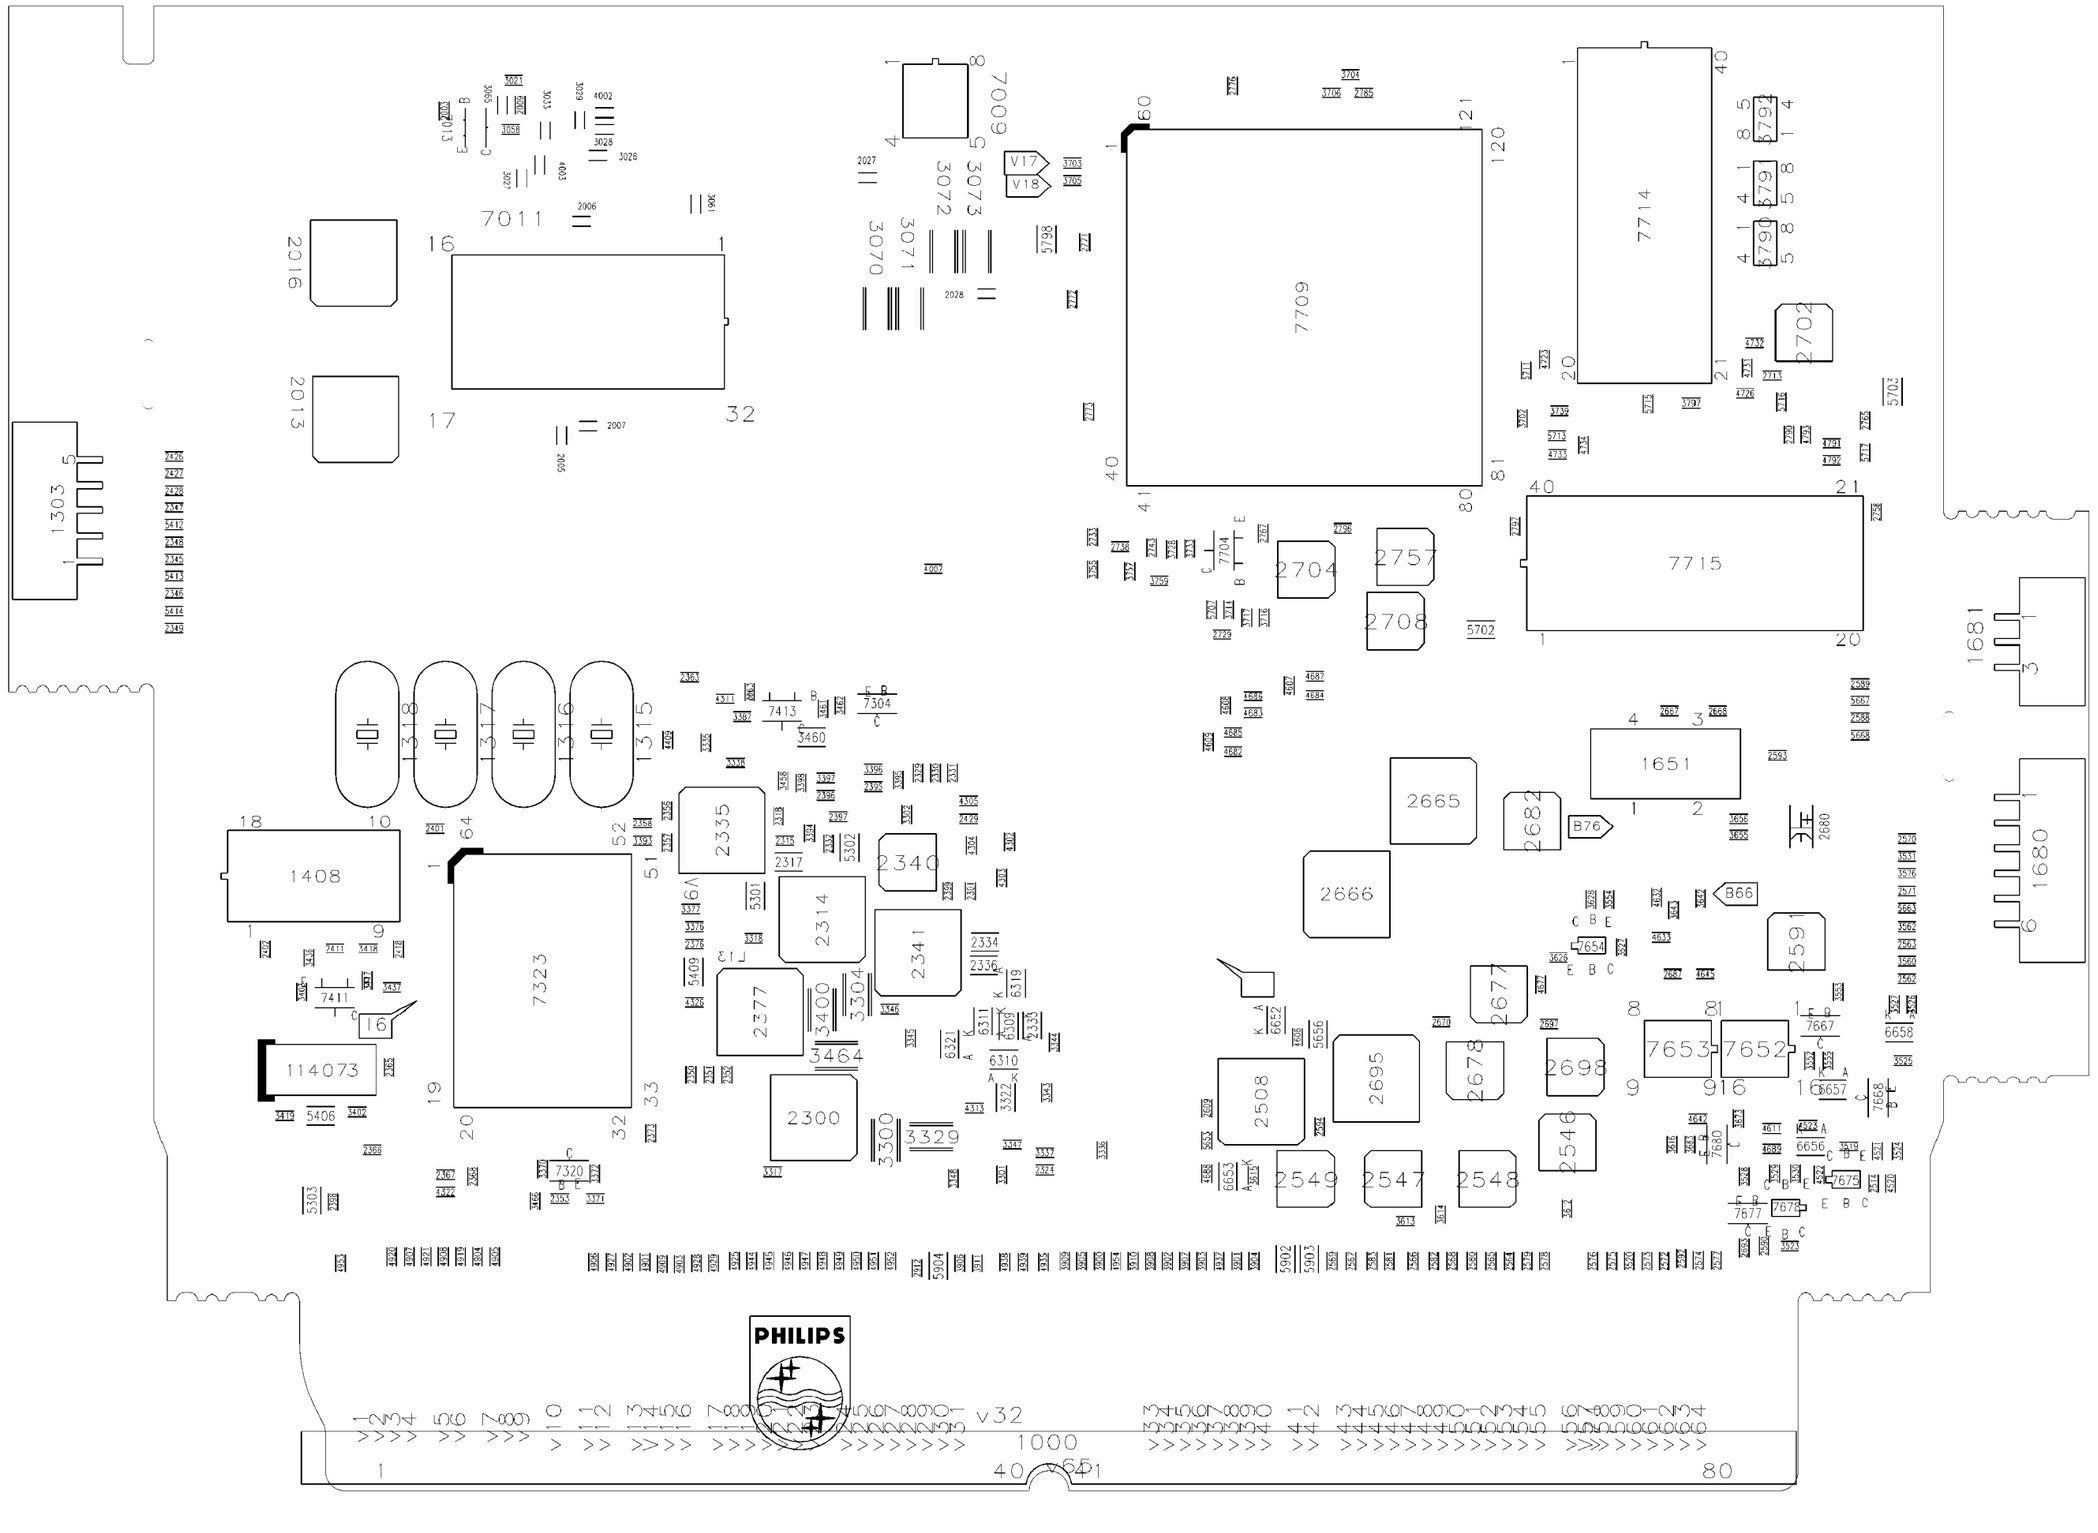

All Models (7621) - SSB Module CBA (Bottom View)

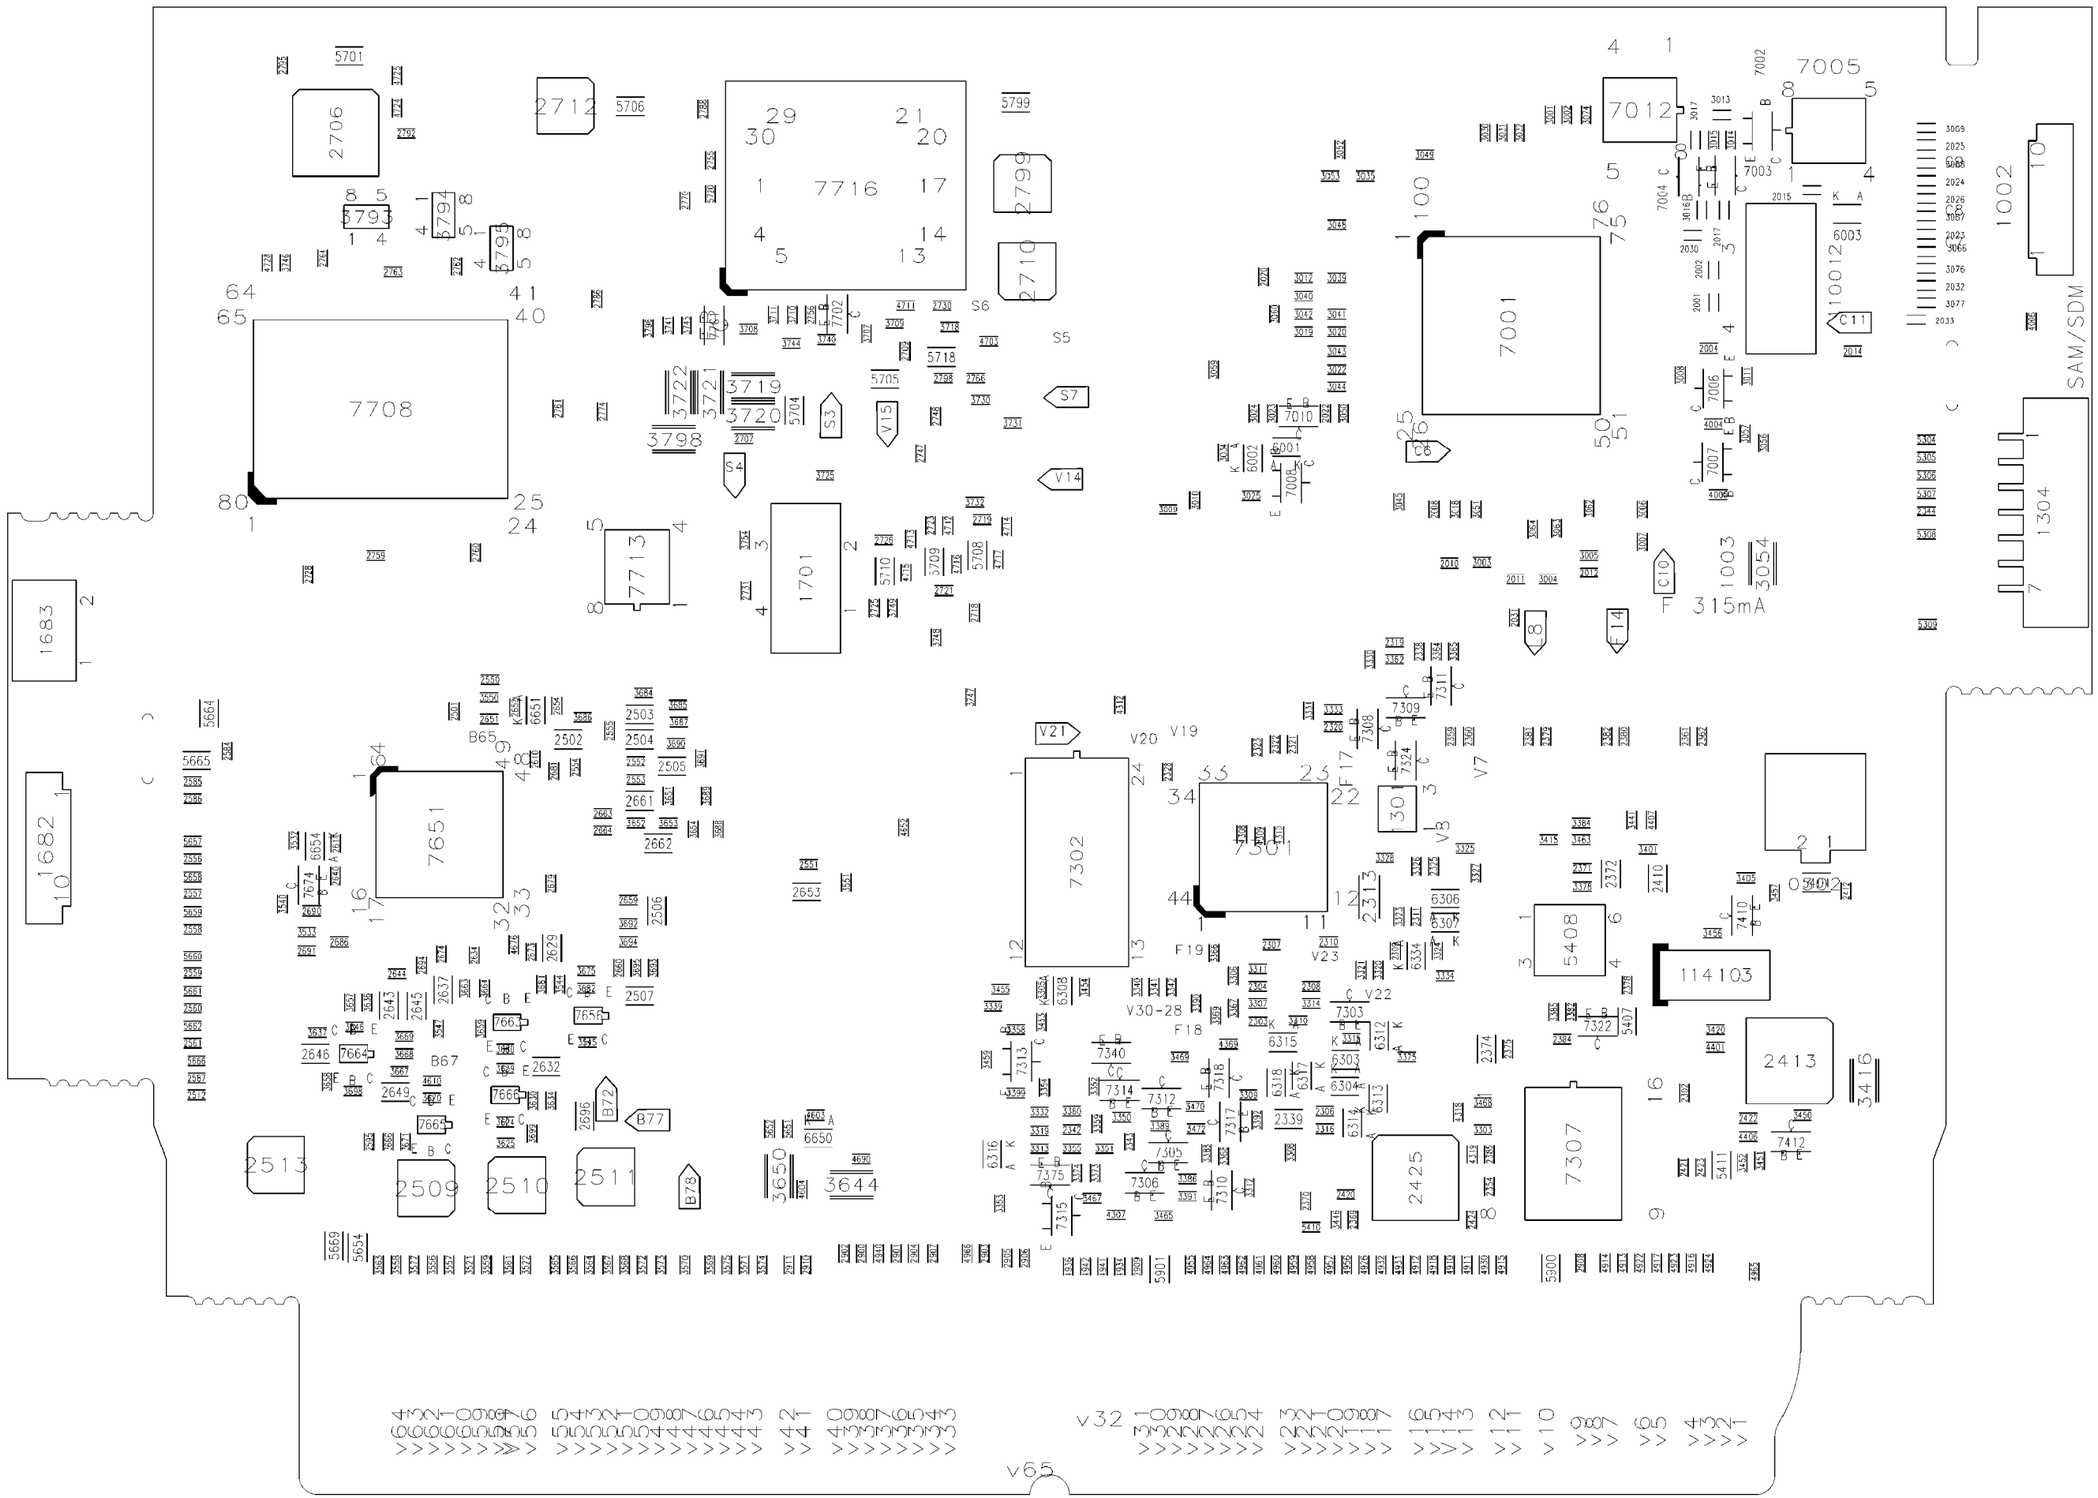

All Models (7621) - Keyboard Panel CBA (Top View)

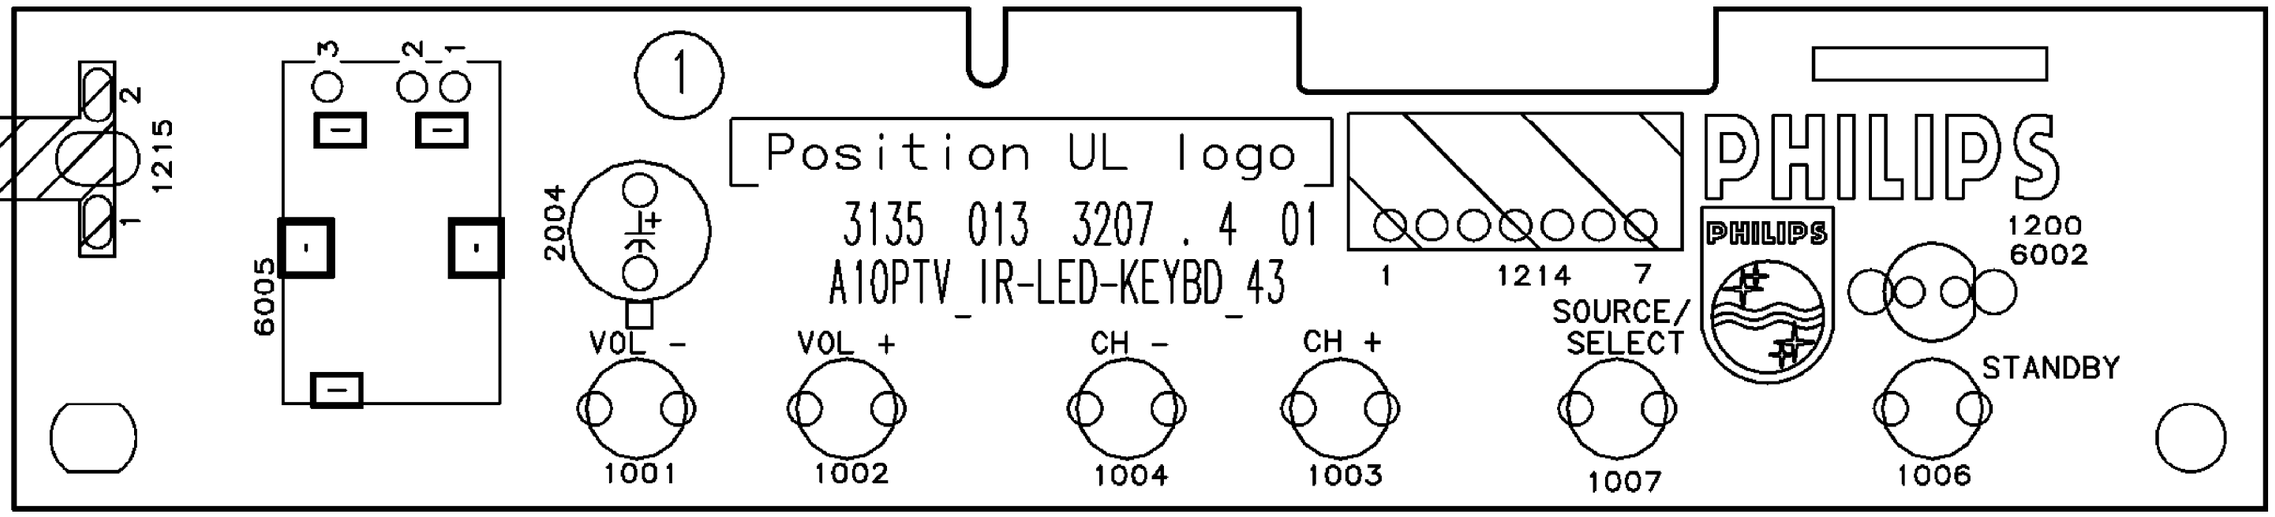

All Models (7621) - Keyboard Panel CBA (Bottom View)

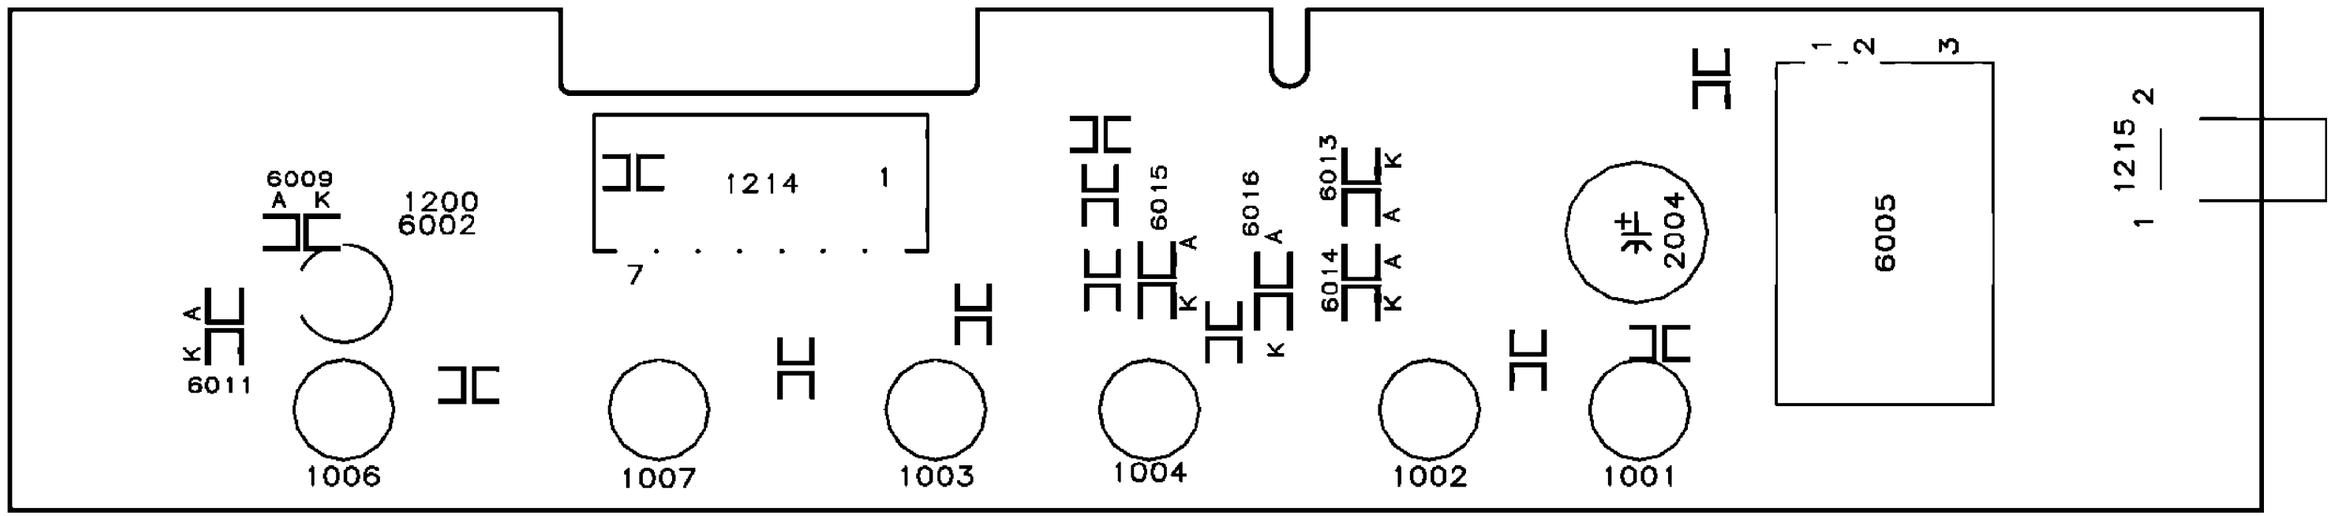

All Models (7621) - CRT Panel CBA (Top View)

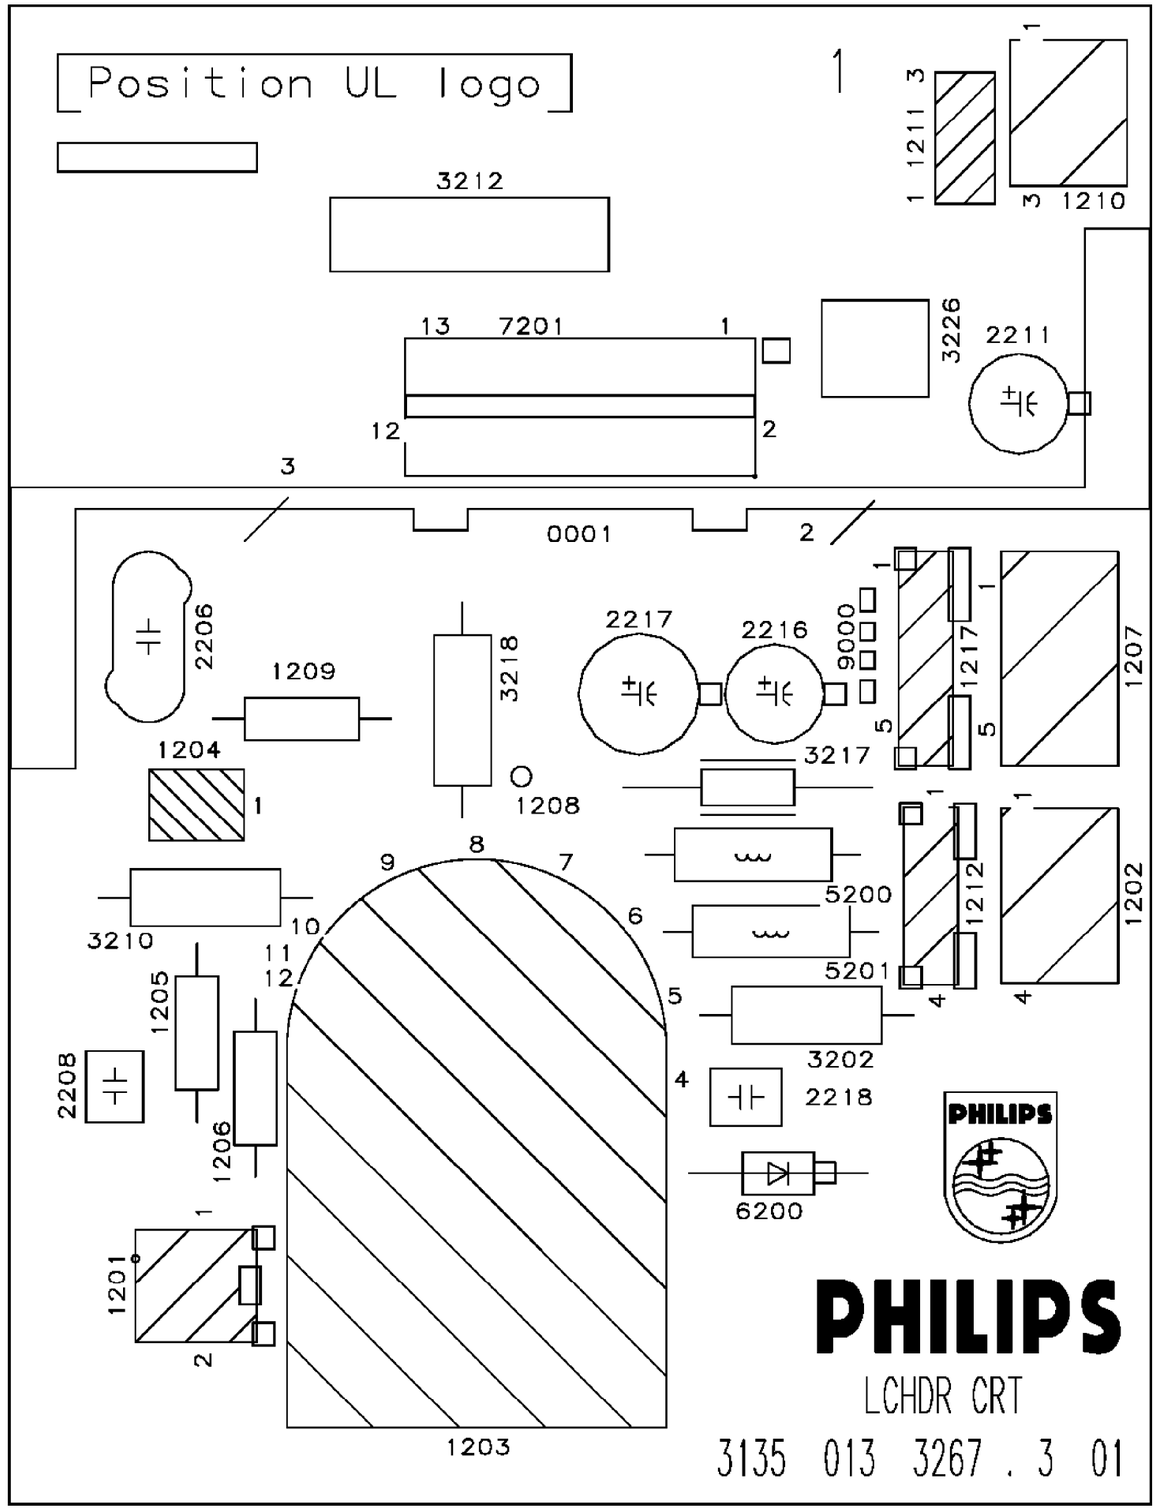

All Models (7621) - CRT Panel CBA (Bottom View)

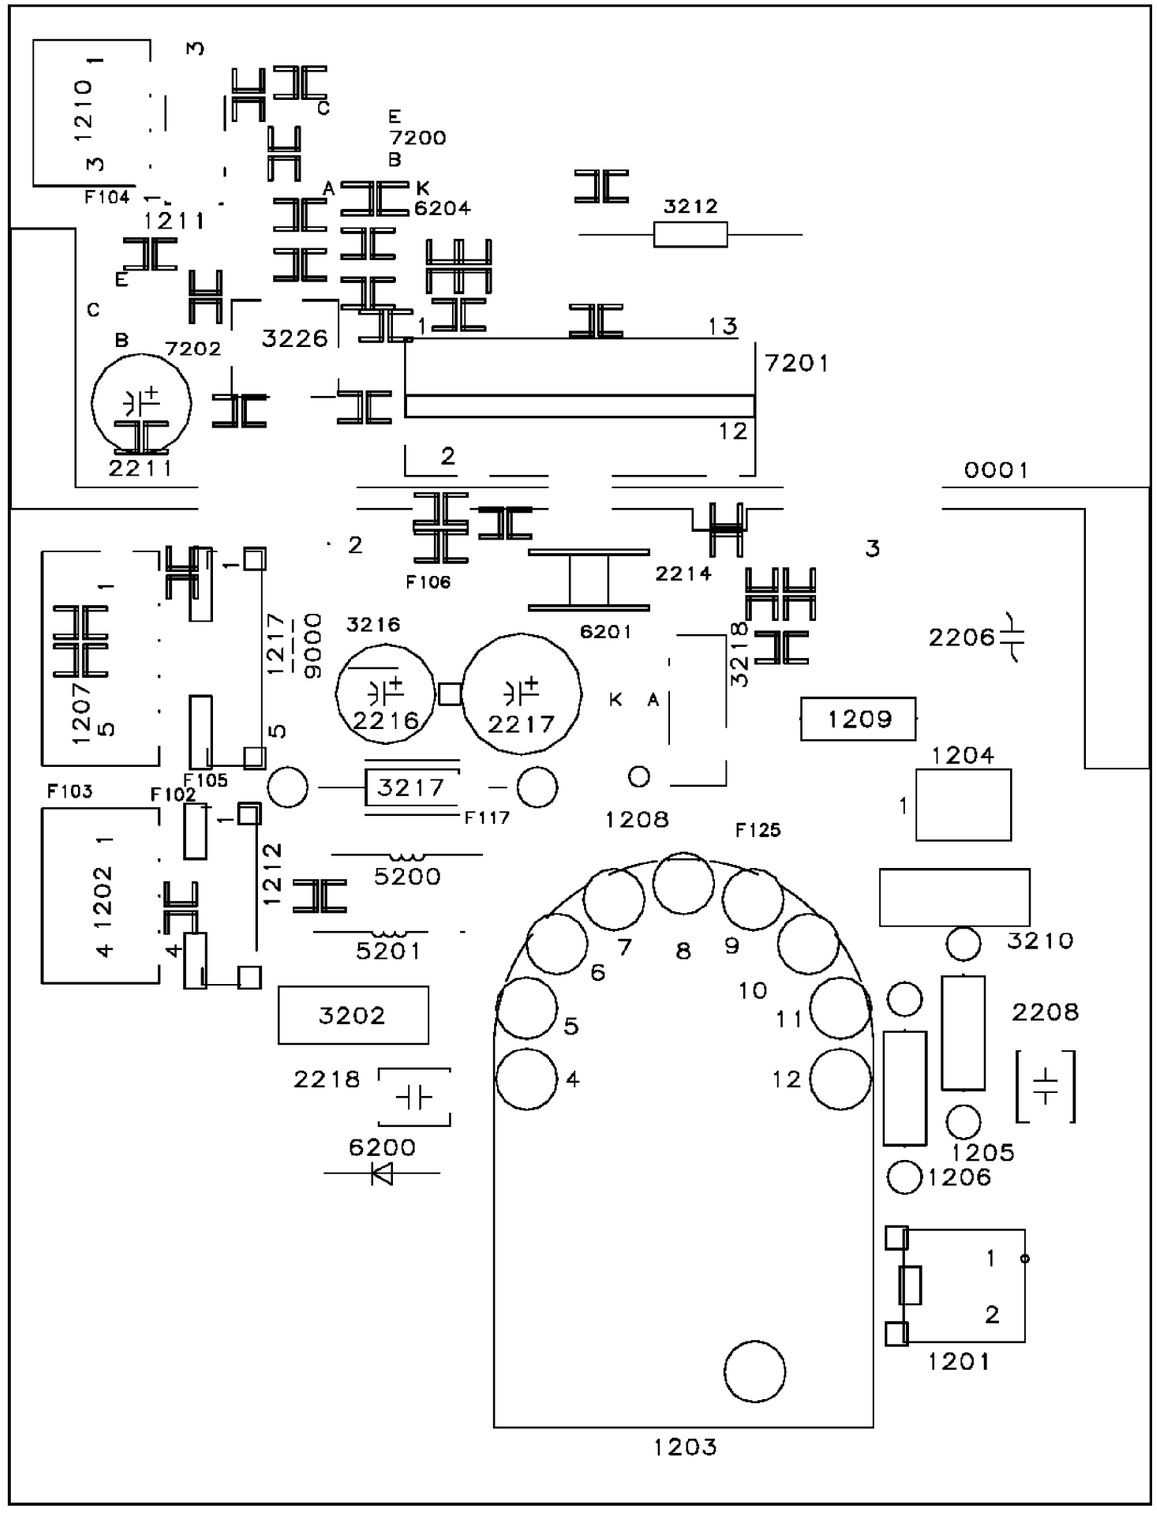

All Models (7621) - Auto Convergence Panel CBA (Top View)

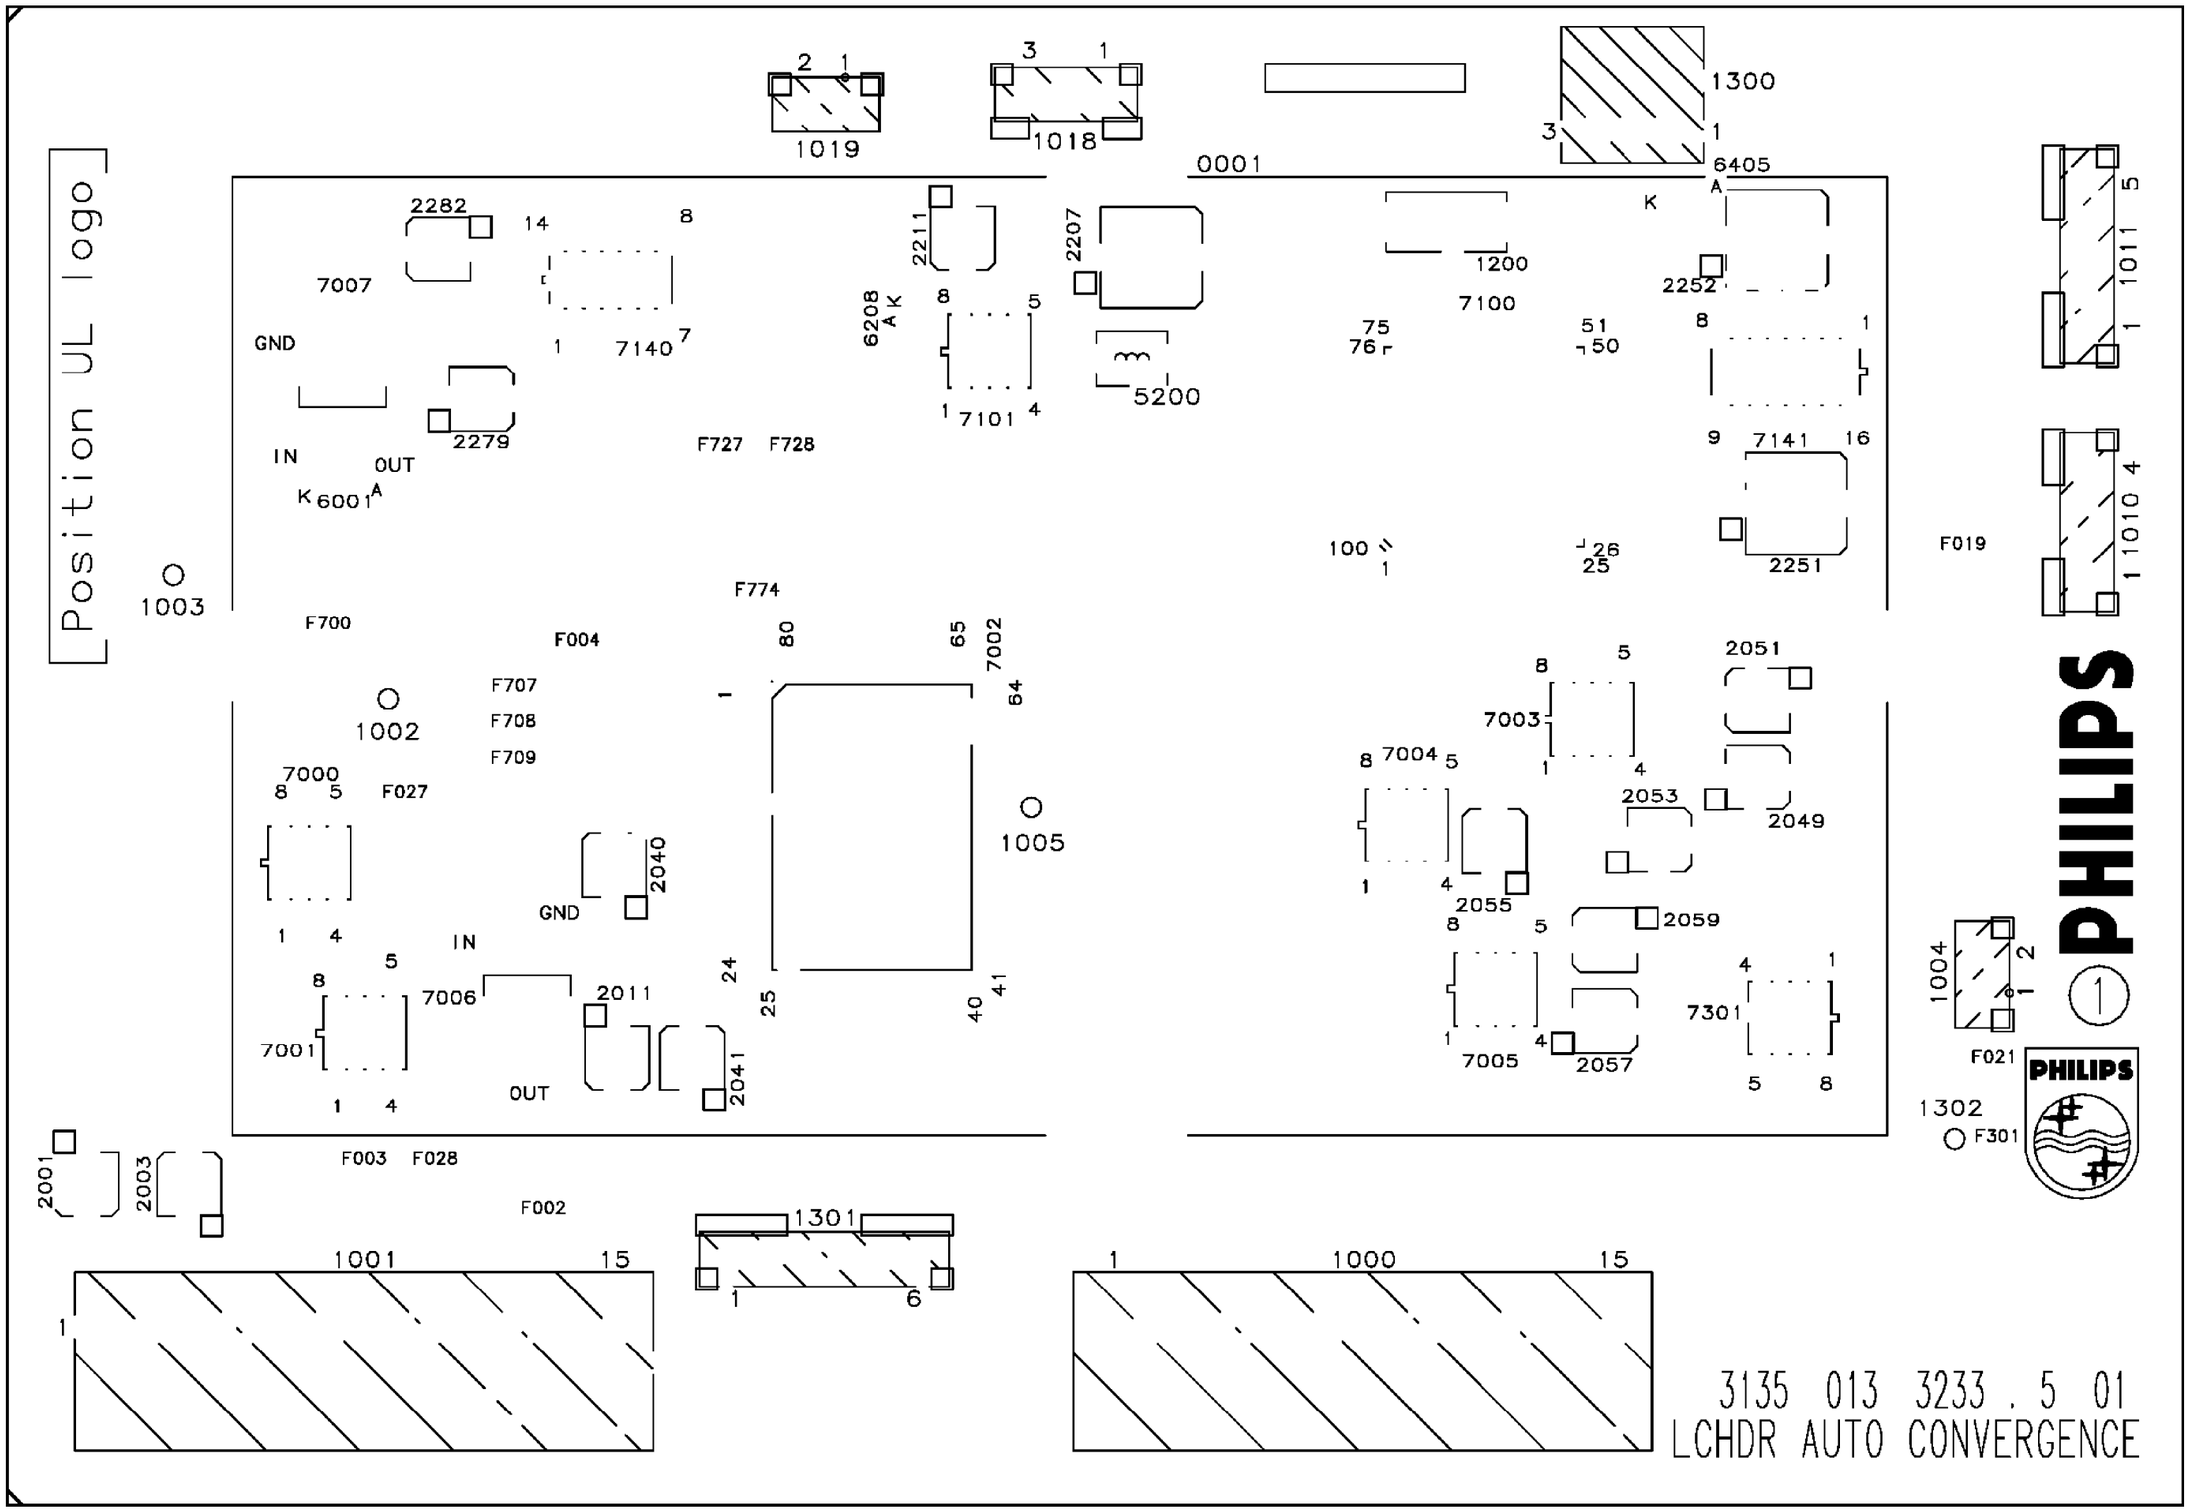

All Models (7621) - Auto Convergence Panel CBA (Bottom View)

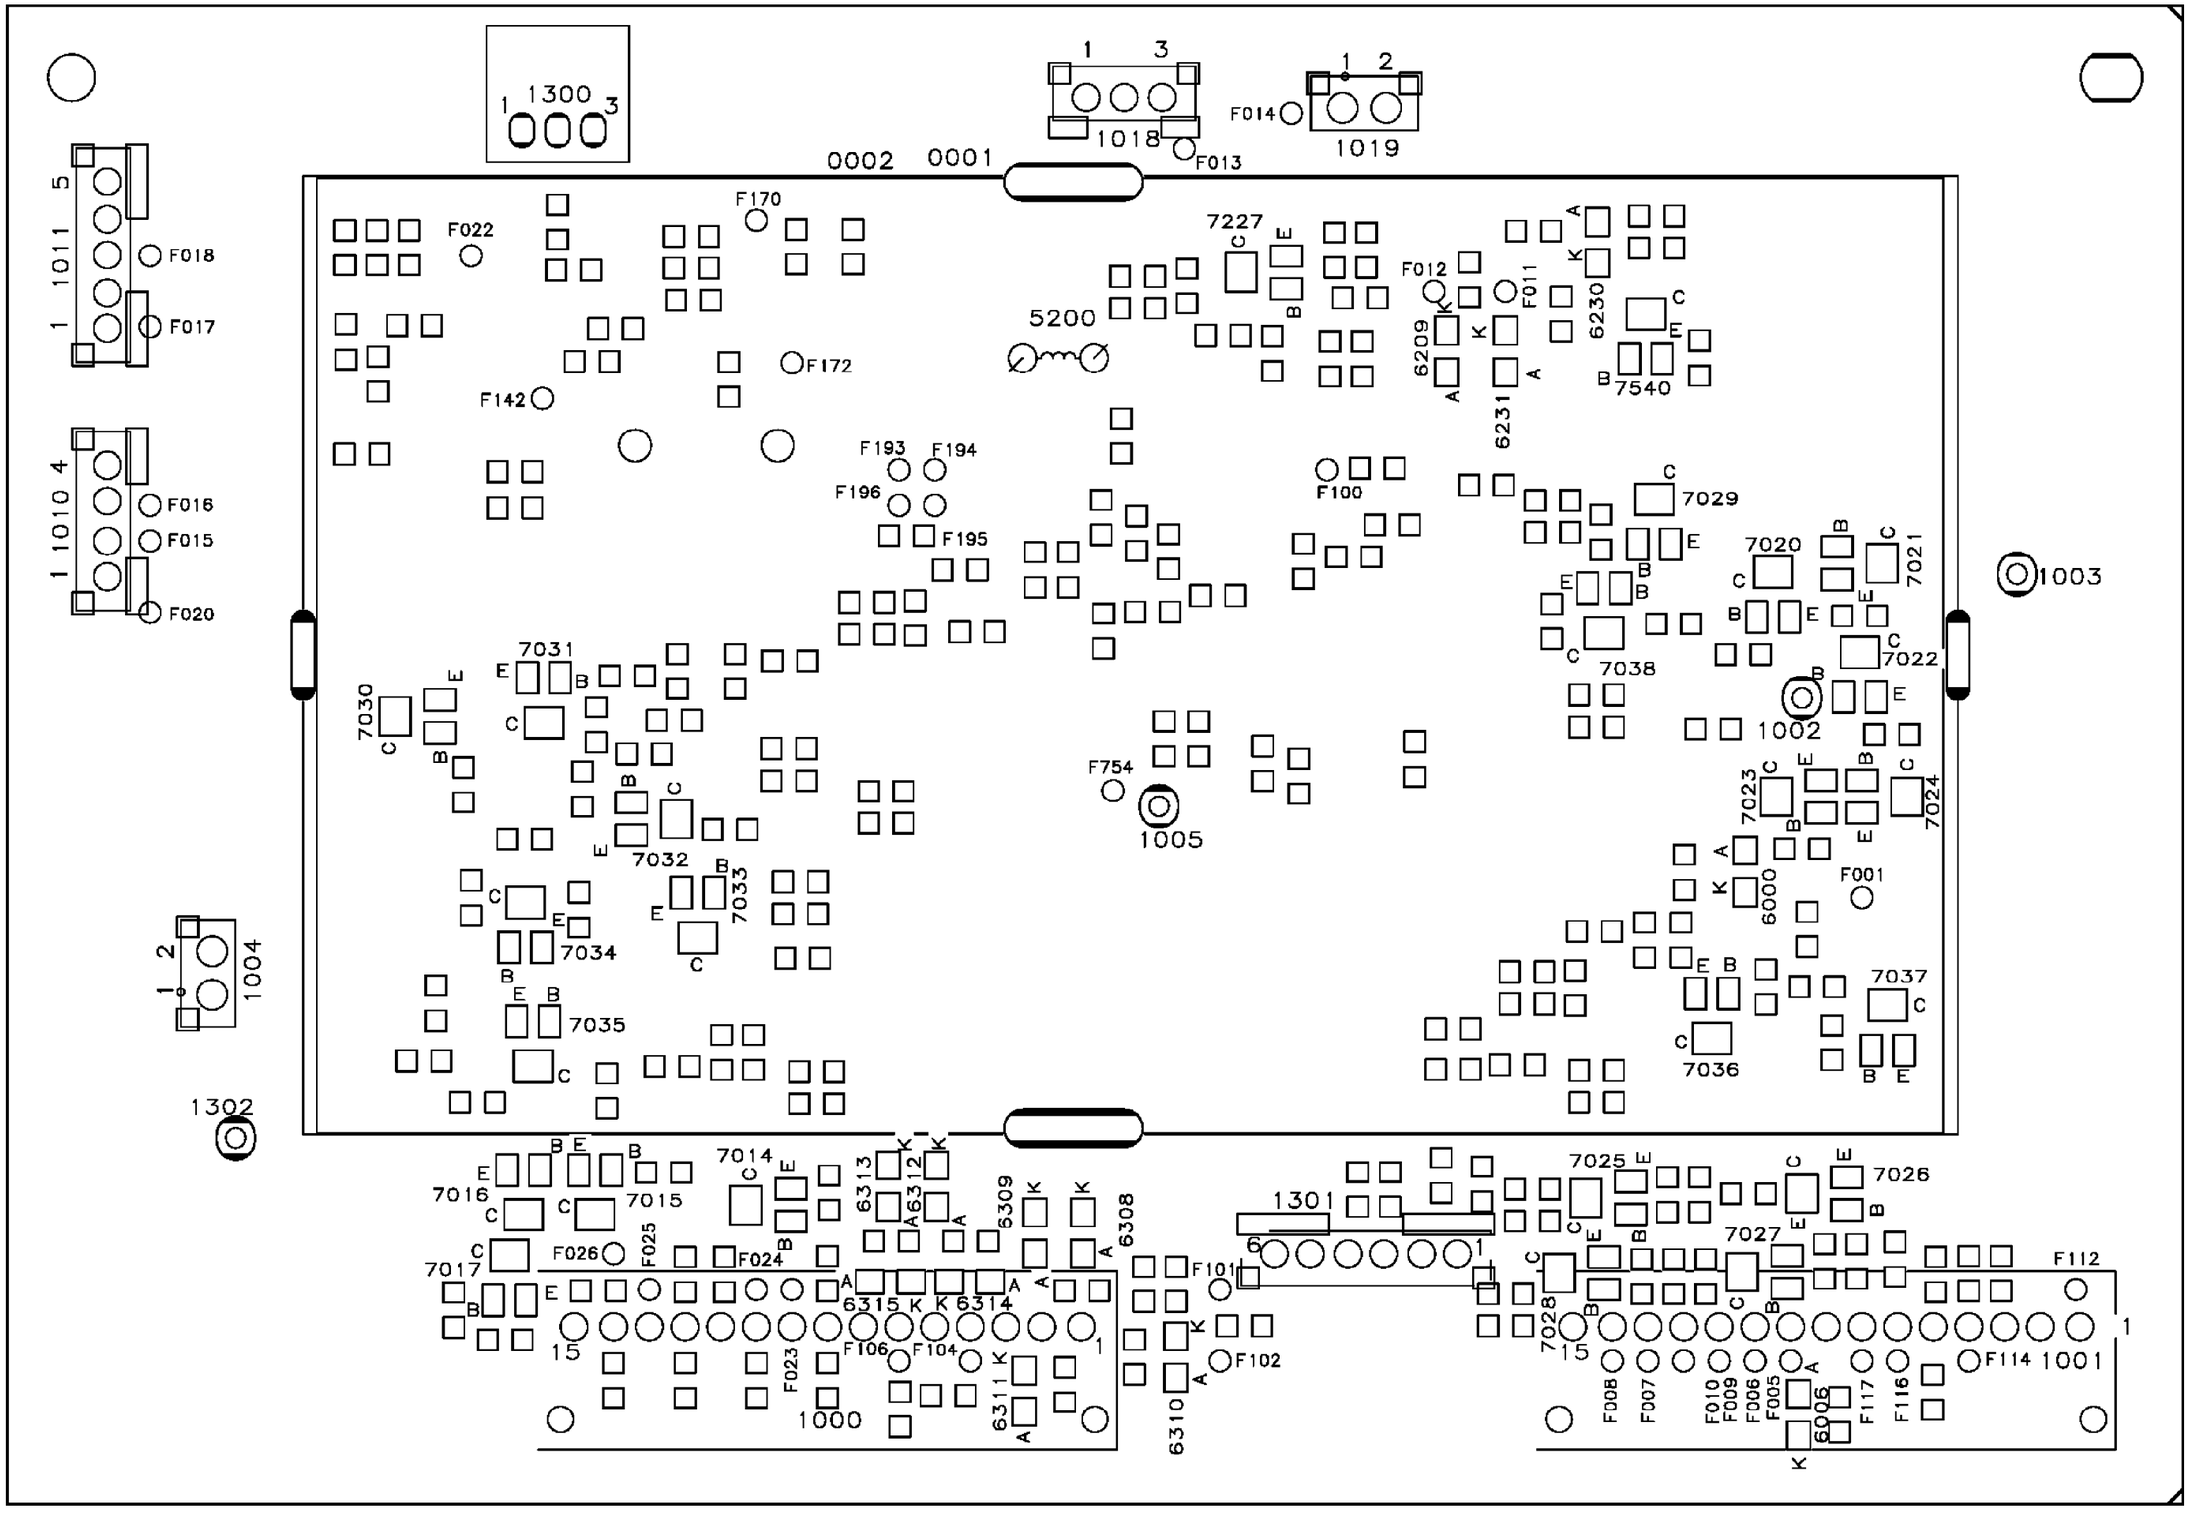

All Models (7621) - HOP Panel CBA (Top View)

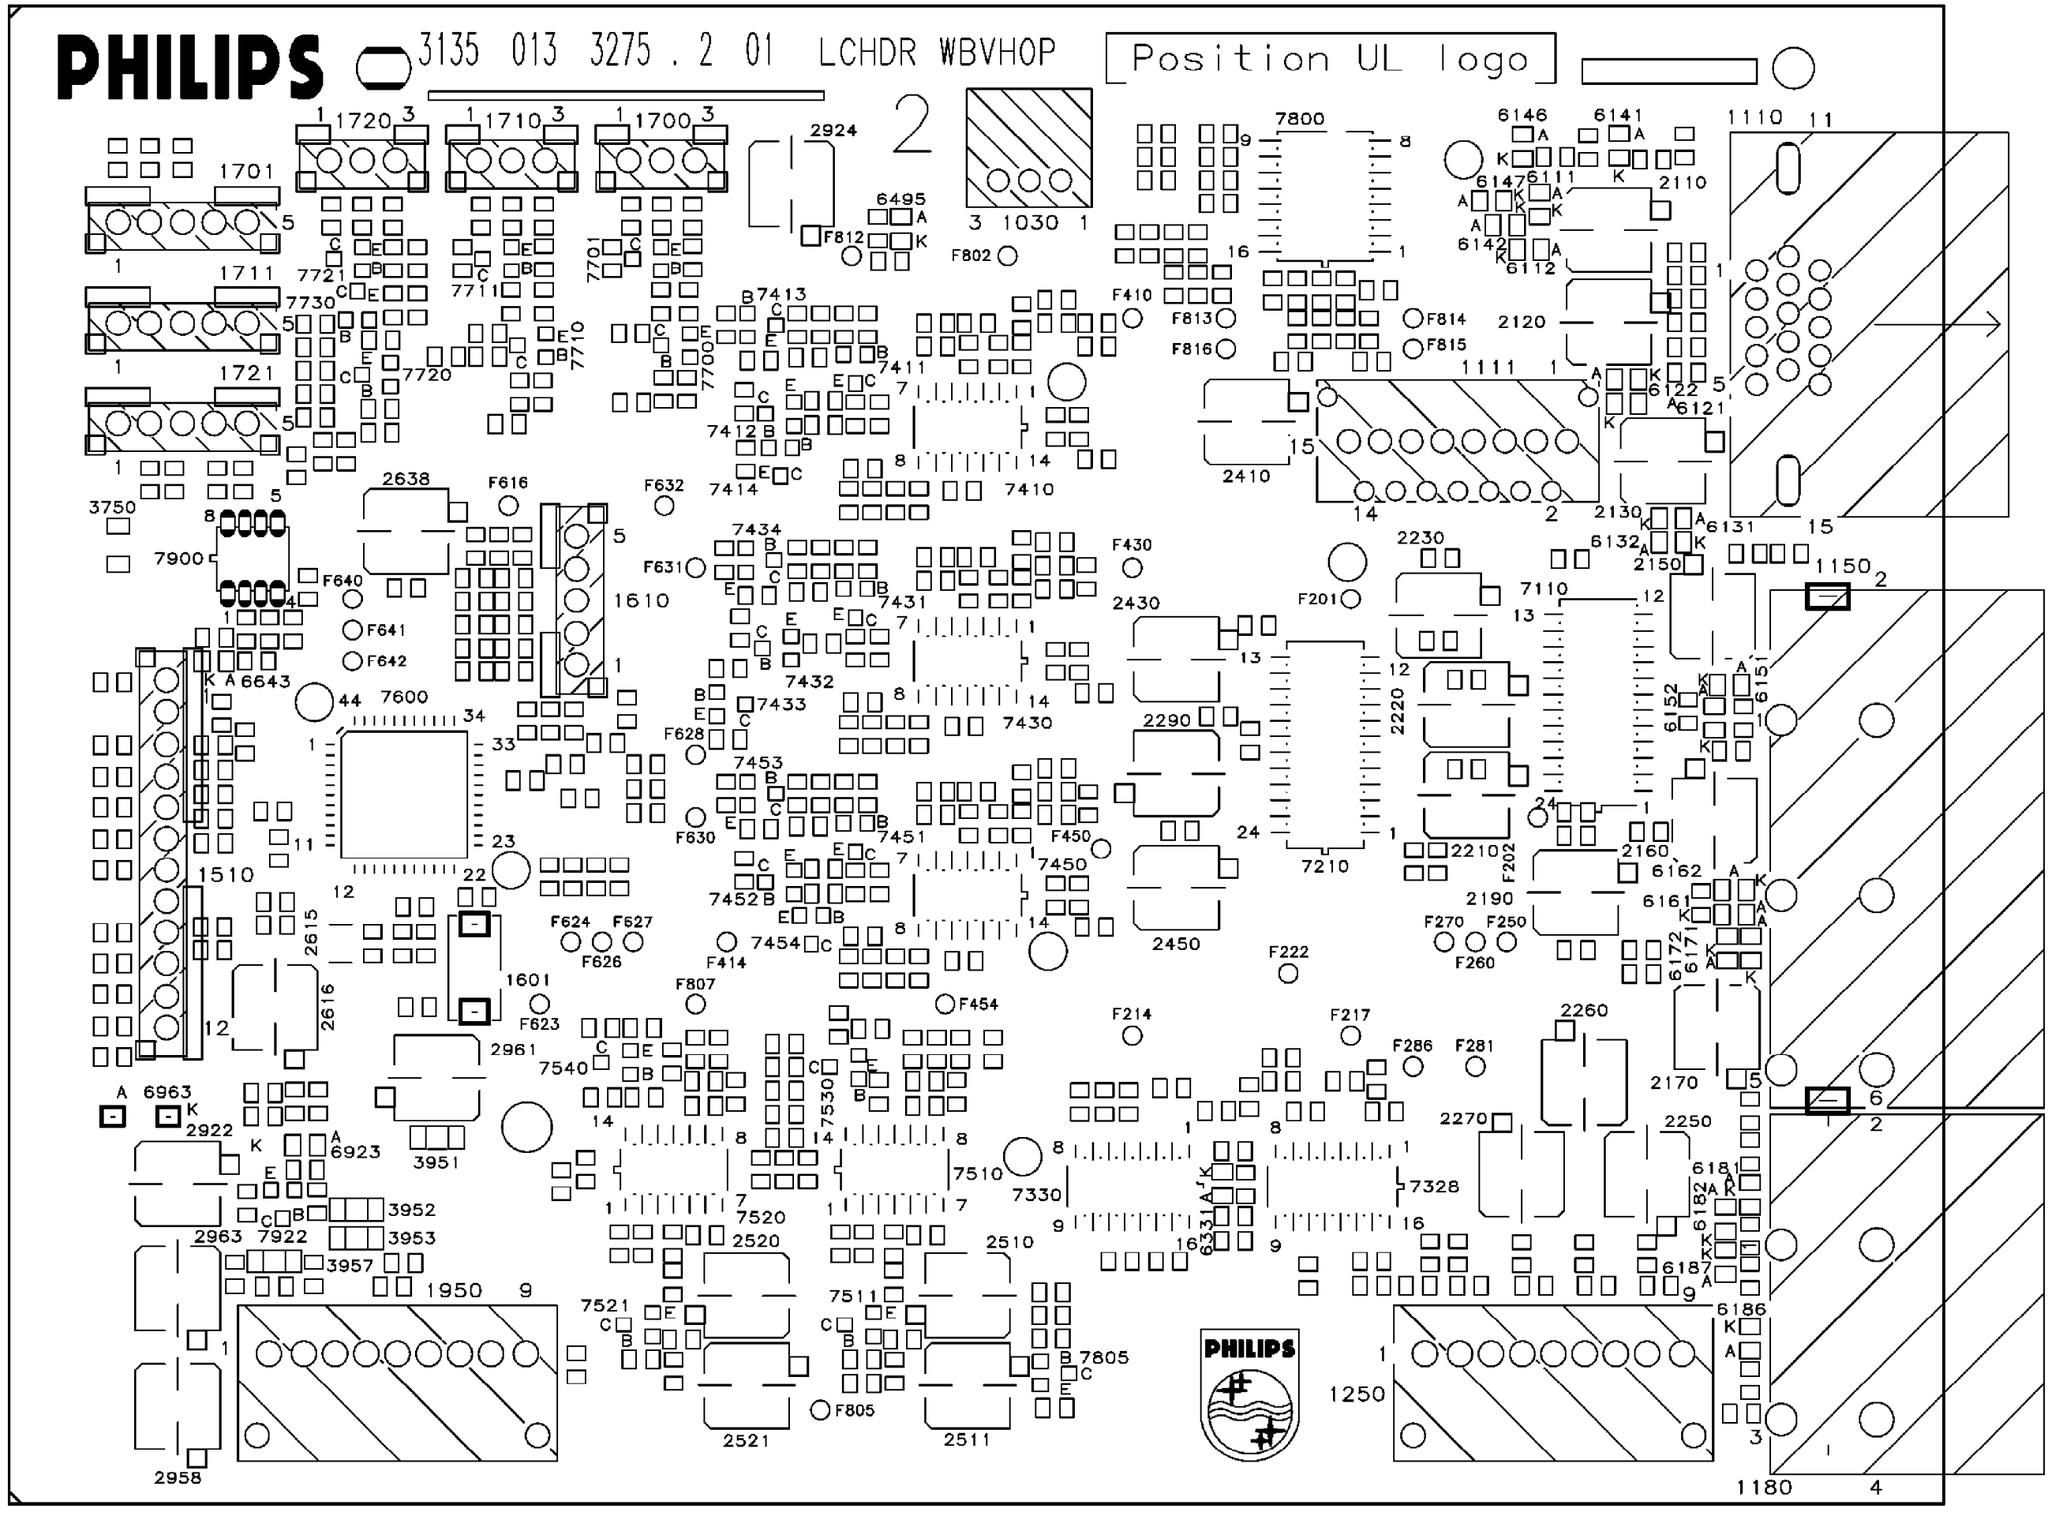

All Models (7621) - HOP Panel CBA (Bottom View)

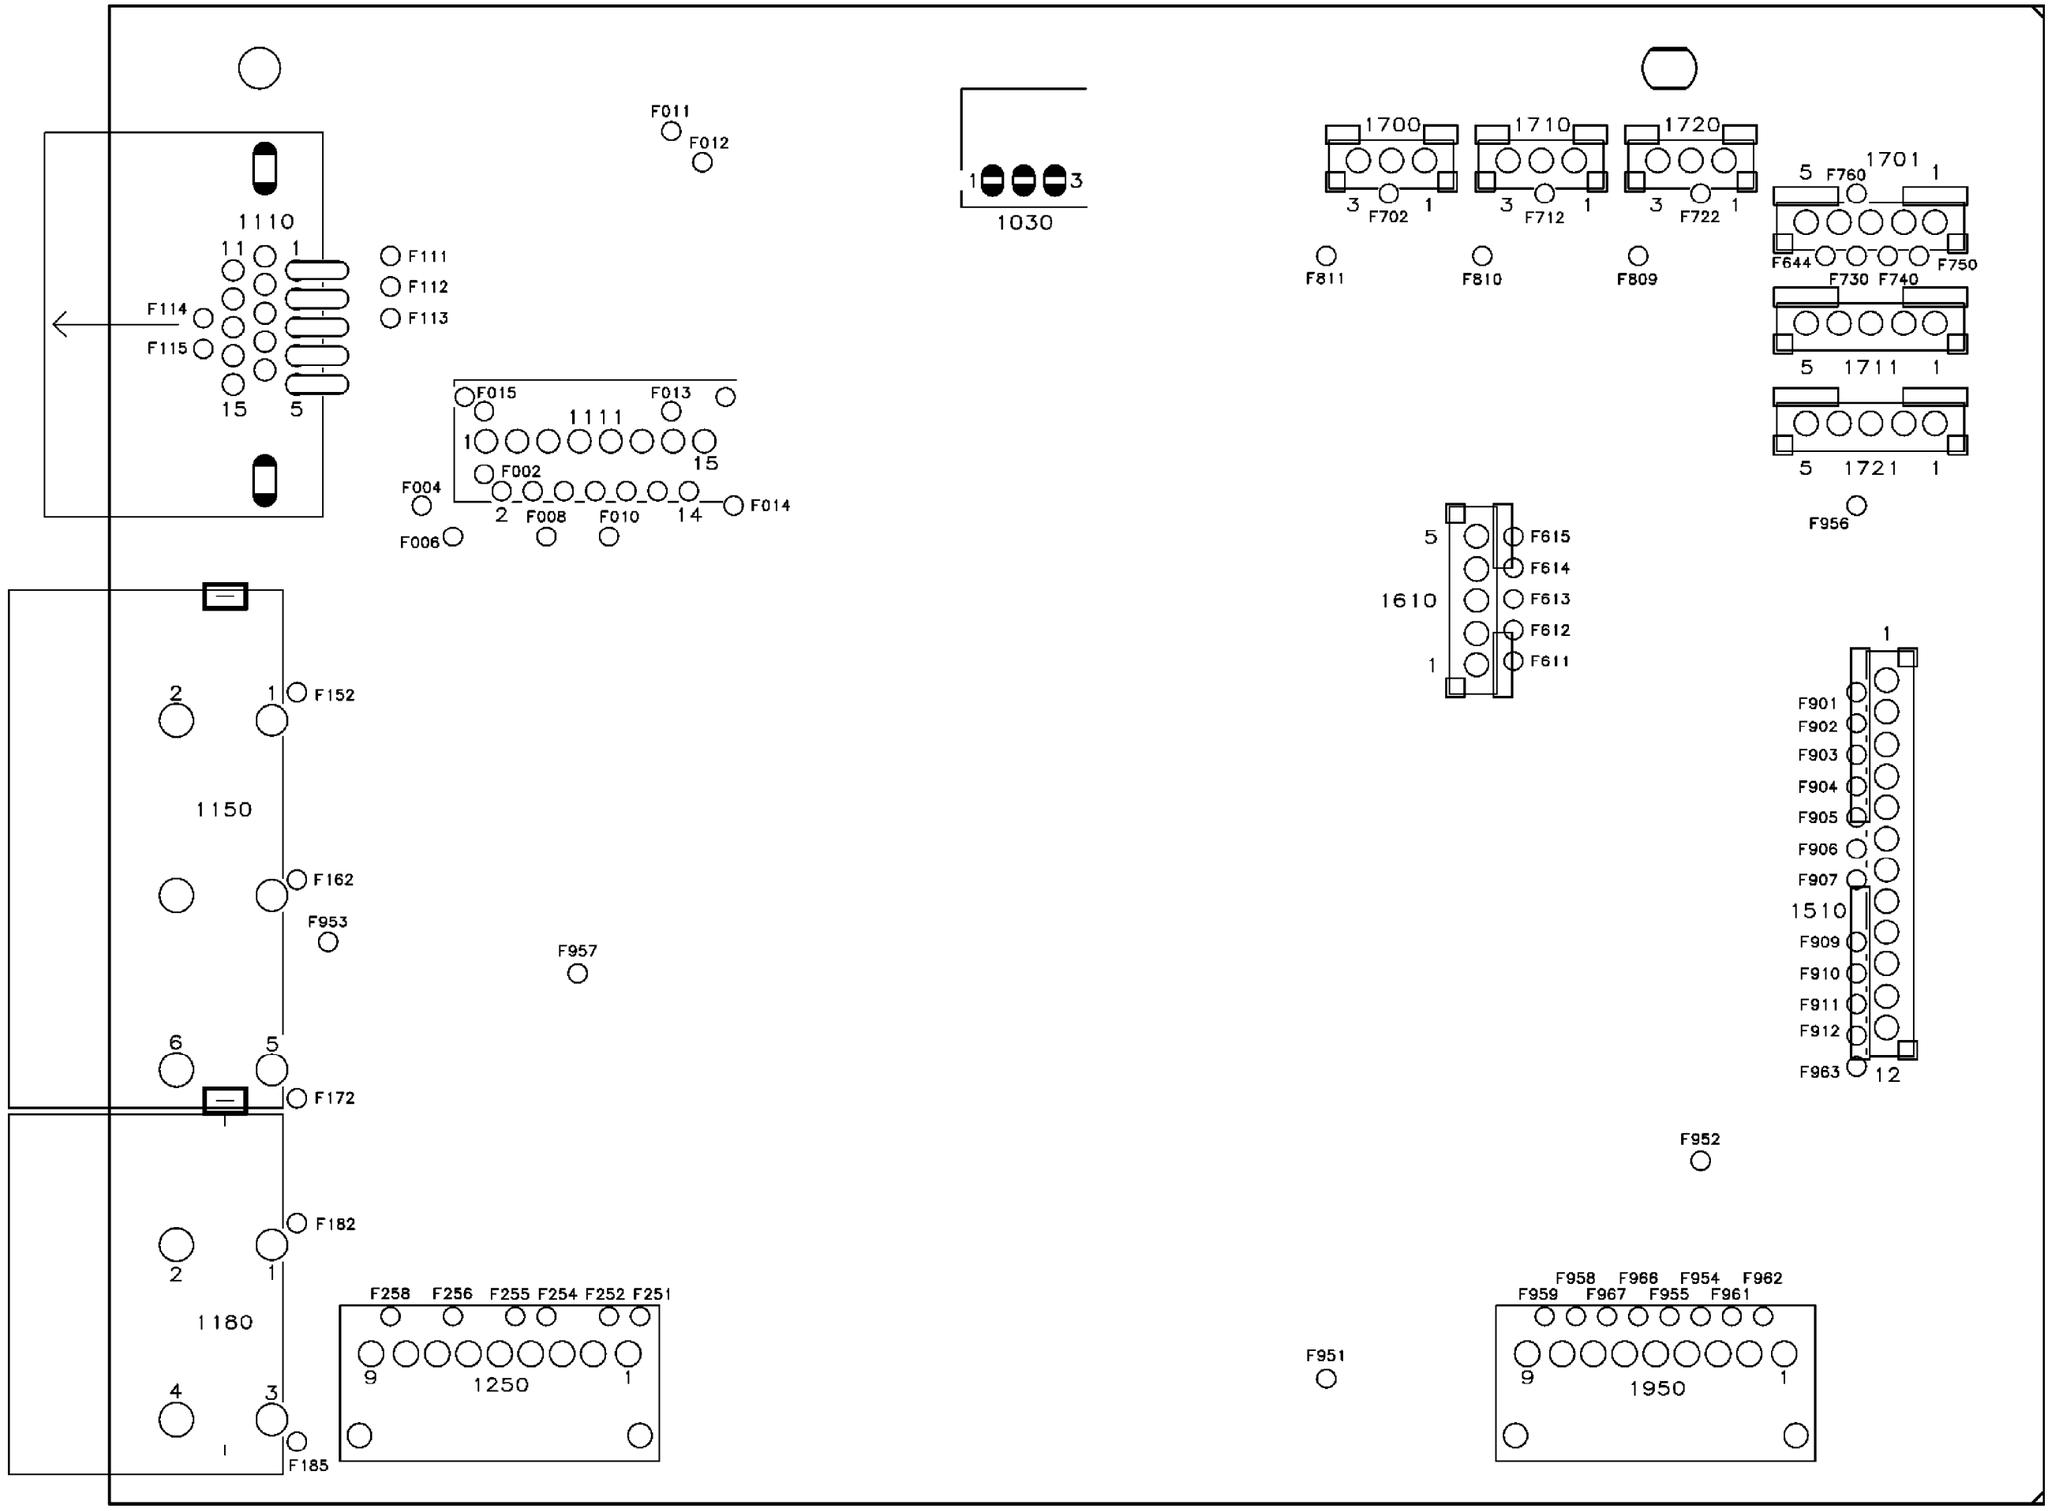

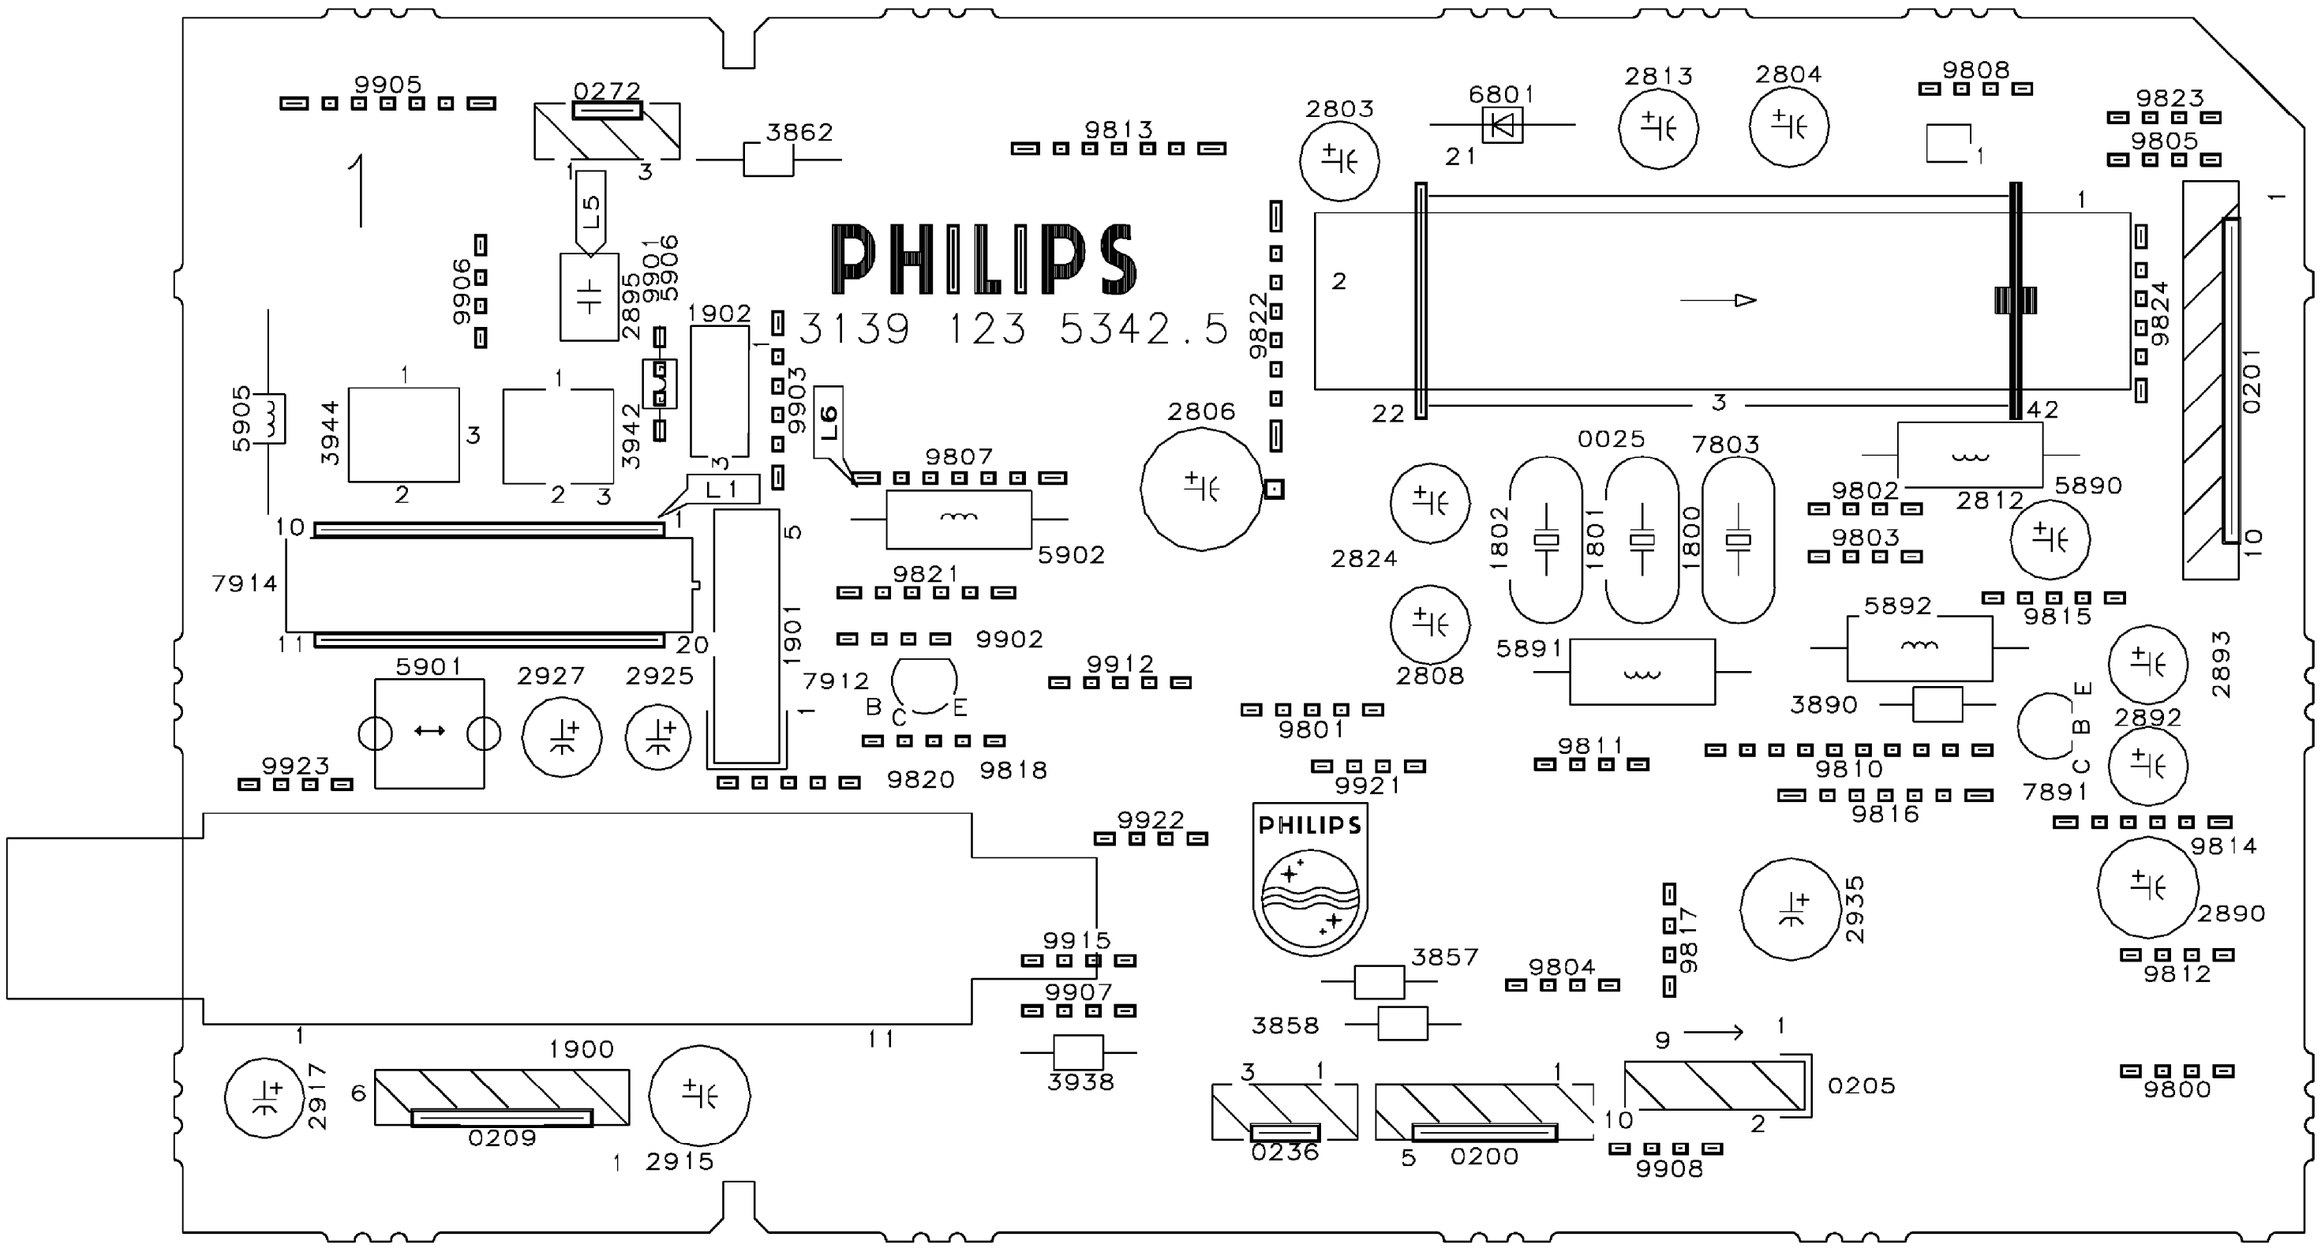
PHILIPS
3139 123 5342.5
9905
0272
3862
9813
2803
6801
2813
2804
9808
9823
9805
L5
9906
2895
9901
5906
1902
9903
L6
9822
2806
9807
5902
L1
9821
9902
9912
7914
5901
2927
2925
7912
9923
9820
9818
1901
9824
0201
3944
3942
5905
2824
1802
1801
1800
0025
7803
9802
9803
2812
5890
2808
5892
5891
9815
2893
3890
2892
9801
9811
9810
9921
9816
7891
9922
9814
2890
9812
9915
9907
3938
3857
3858
9804
9817
2935
1900
2917
0209
2915
0236
0200
0205
9908
9800

All Models (7621) - PIP Panel CBA, Single & 2 - Tuner Panels (Bottom View)

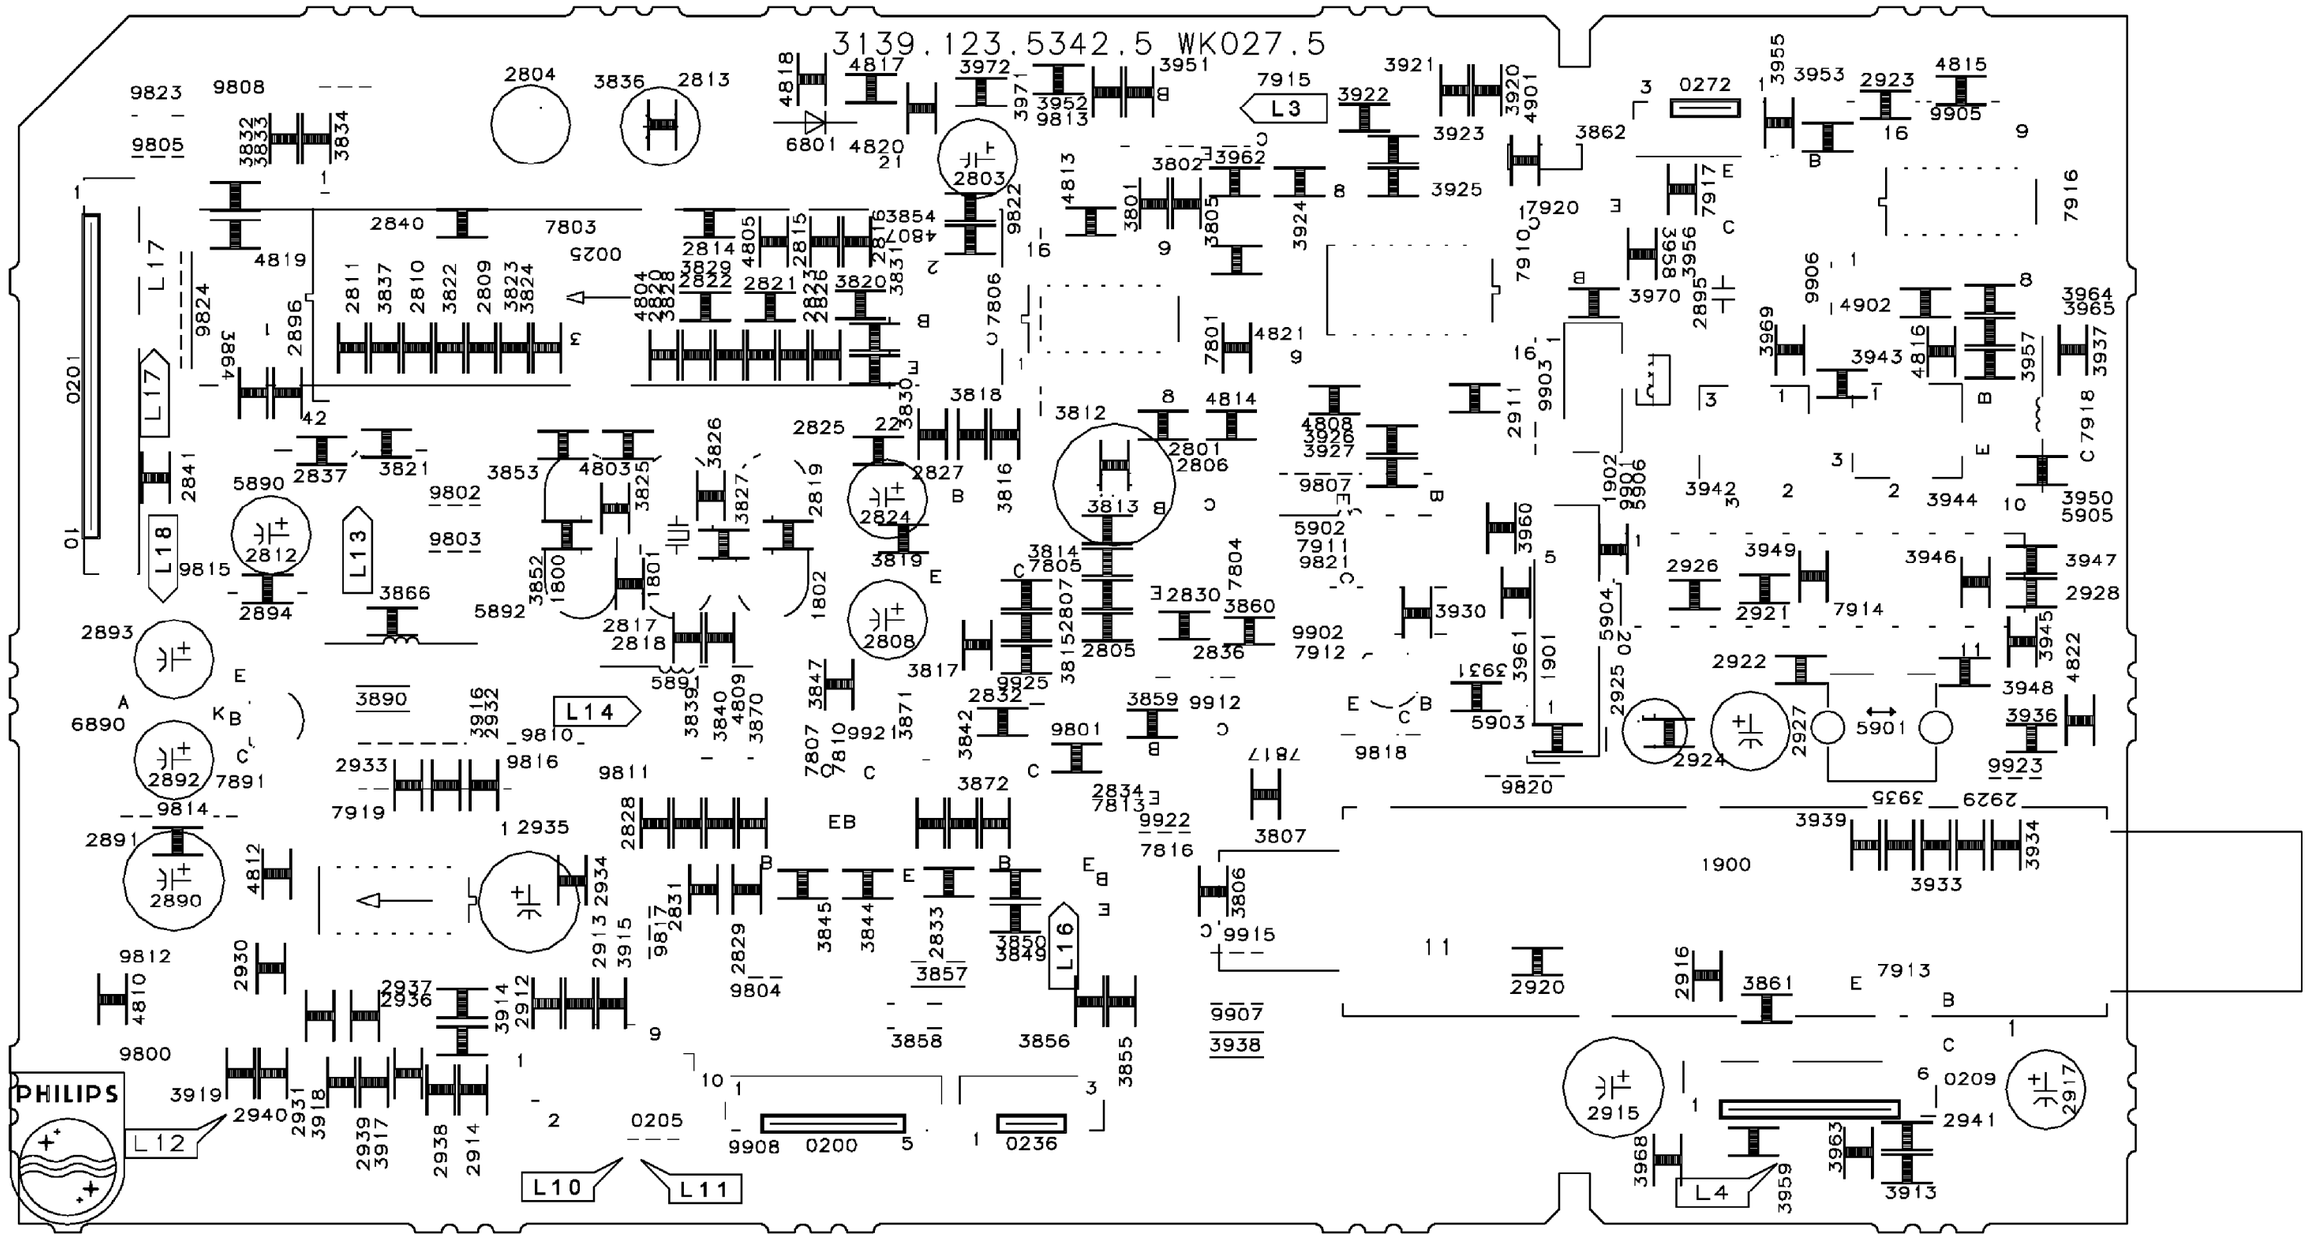

Position UL logo
SIDE JACK PANEL
3135 013 3217 . 3 02
PHILIPS
1007
5
8
2
3
9
8
1001
2
1
1002
7
8
9
11
2
3
4
6
9000
9001
9002
1335
1
10
1344
1
3
1337
2
1

All Models (7621) - Side Jack Panel CBA (Bottom View)

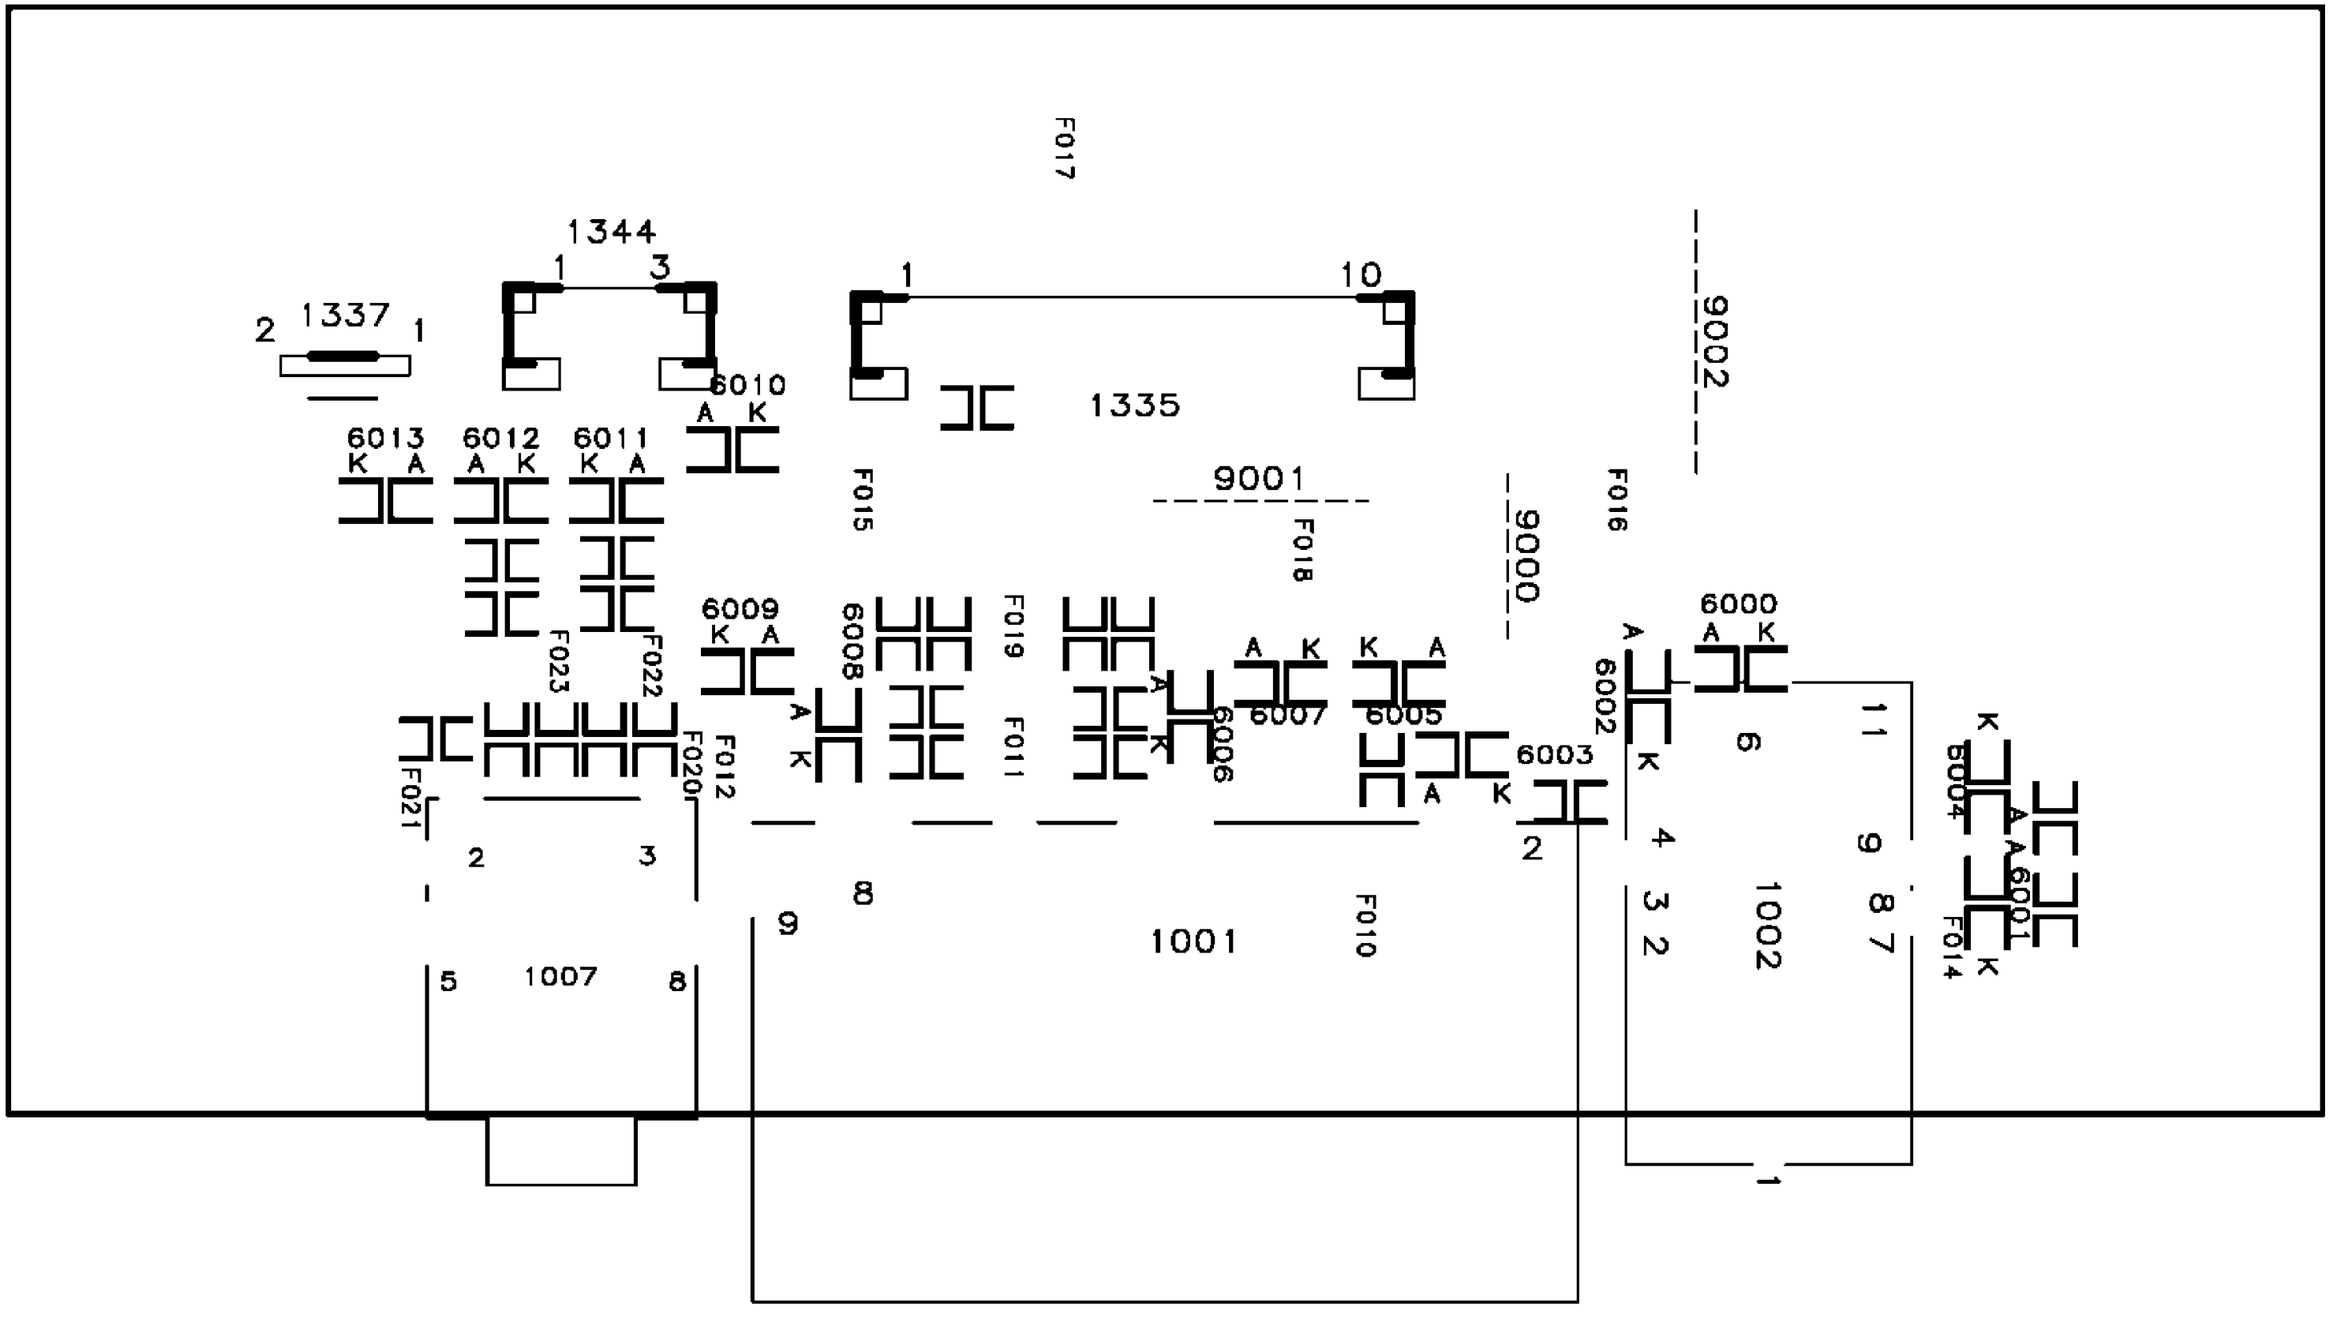

SIDE JACK PANEL CBA (COMPONENT SIDE)

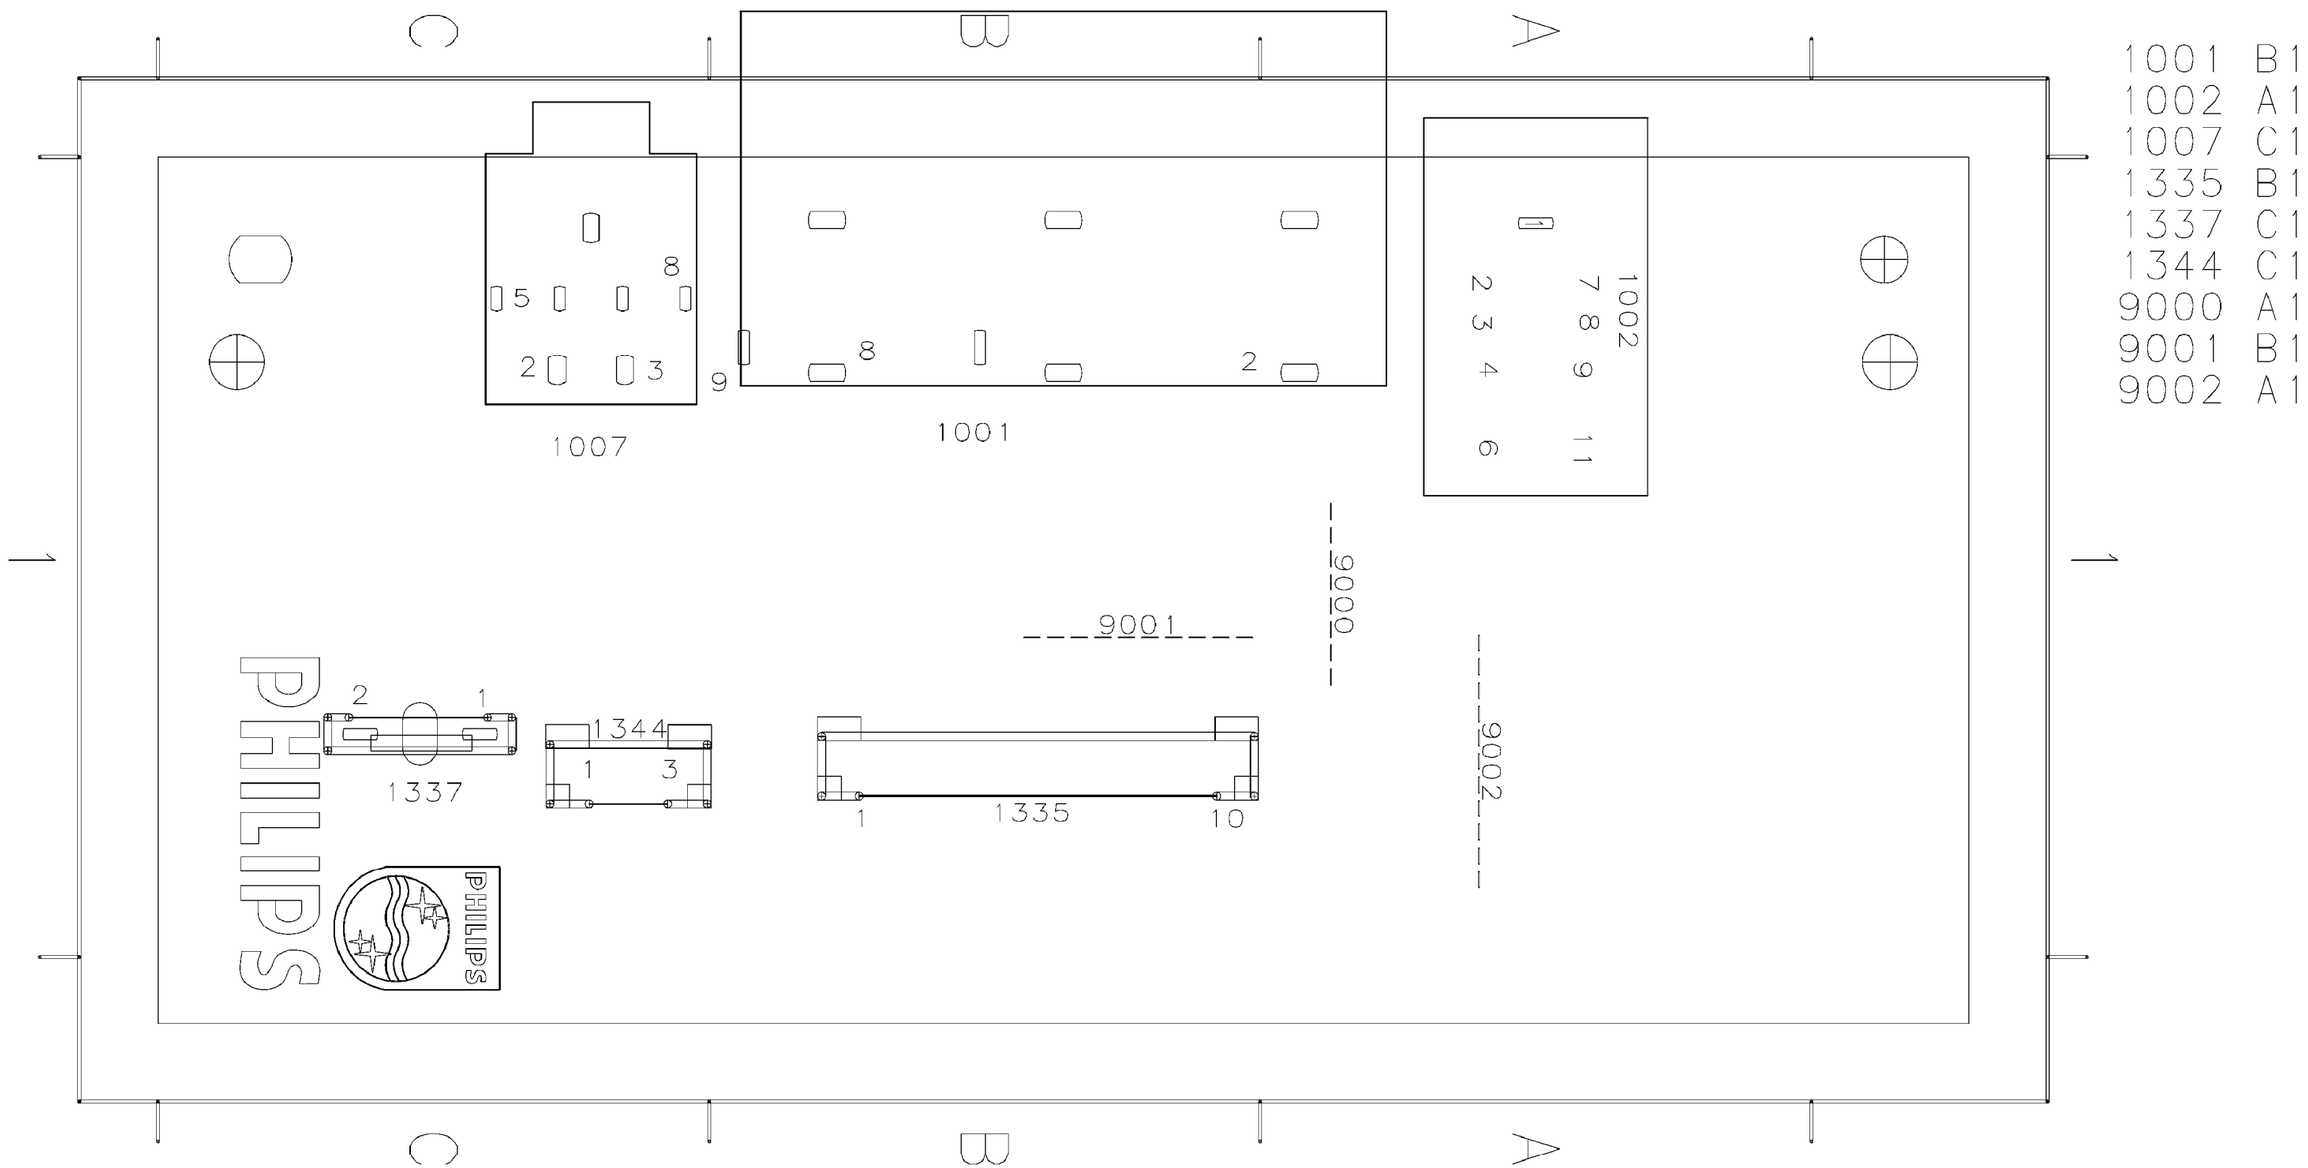

1001	B1
1002	A1
1007	C1
1335	B1
1337	C1
1344	C1
9000	A1
9001	B1
9002	A1

SIDE JACK PANEL CBA (COPPER SIDE)

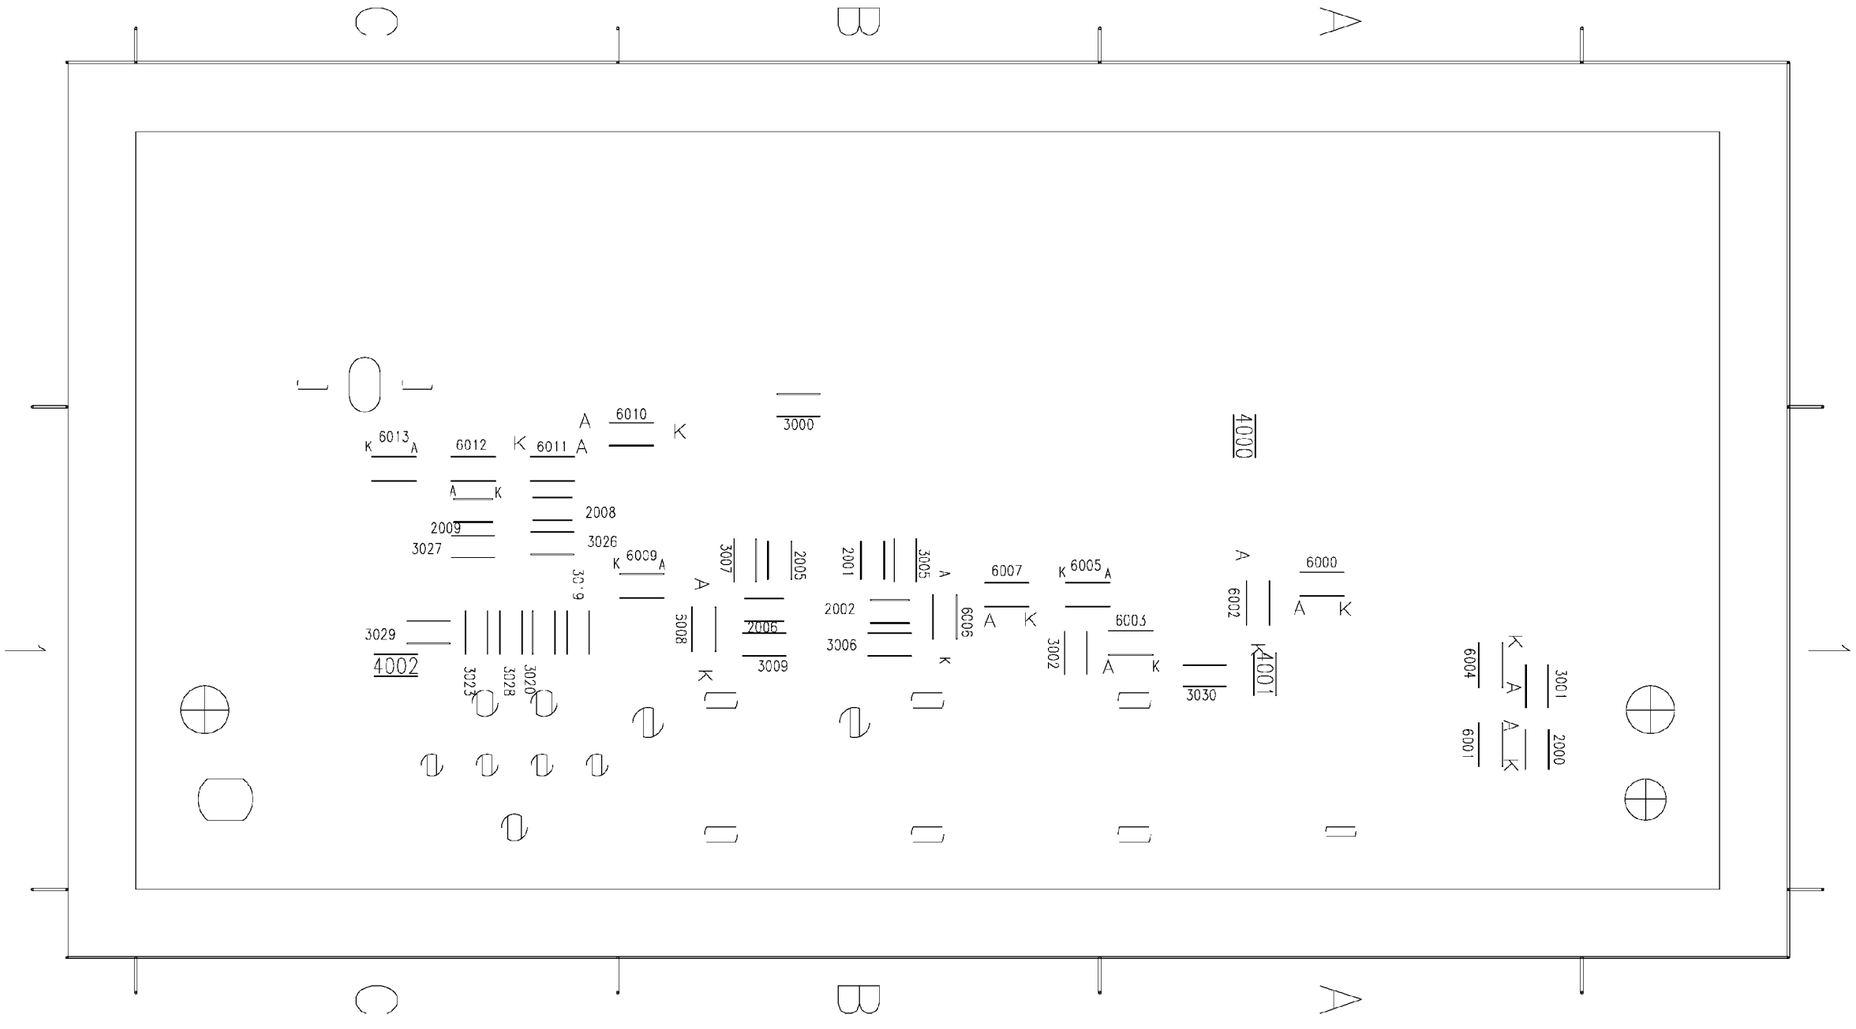

2000	A1	6000	A1
2001	B1	6001	A1
2002	B1	6002	A1
2005	B1	6003	A1
2006	B1	6001	A1
2008	C1	6005	B1
2009	C1	6006	B1
3000	B1	6007	B1
3001	A1	6008	B1
3002	B1	6009	B1
3005	B1	6010	B1
3006	B1	6011	C1
3007	B1	6012	C1
3009	B1	6013	C1
3019	C1		
3020	C1		
3023	C1		
3026	C1		
3027	C1		
3028	C1		
3029	C1		
3030	A1		
4000	A1		
4001	A1		
4002	C1		

All Models (7621) - 3D Comb Filter Panel CBA (Top View)

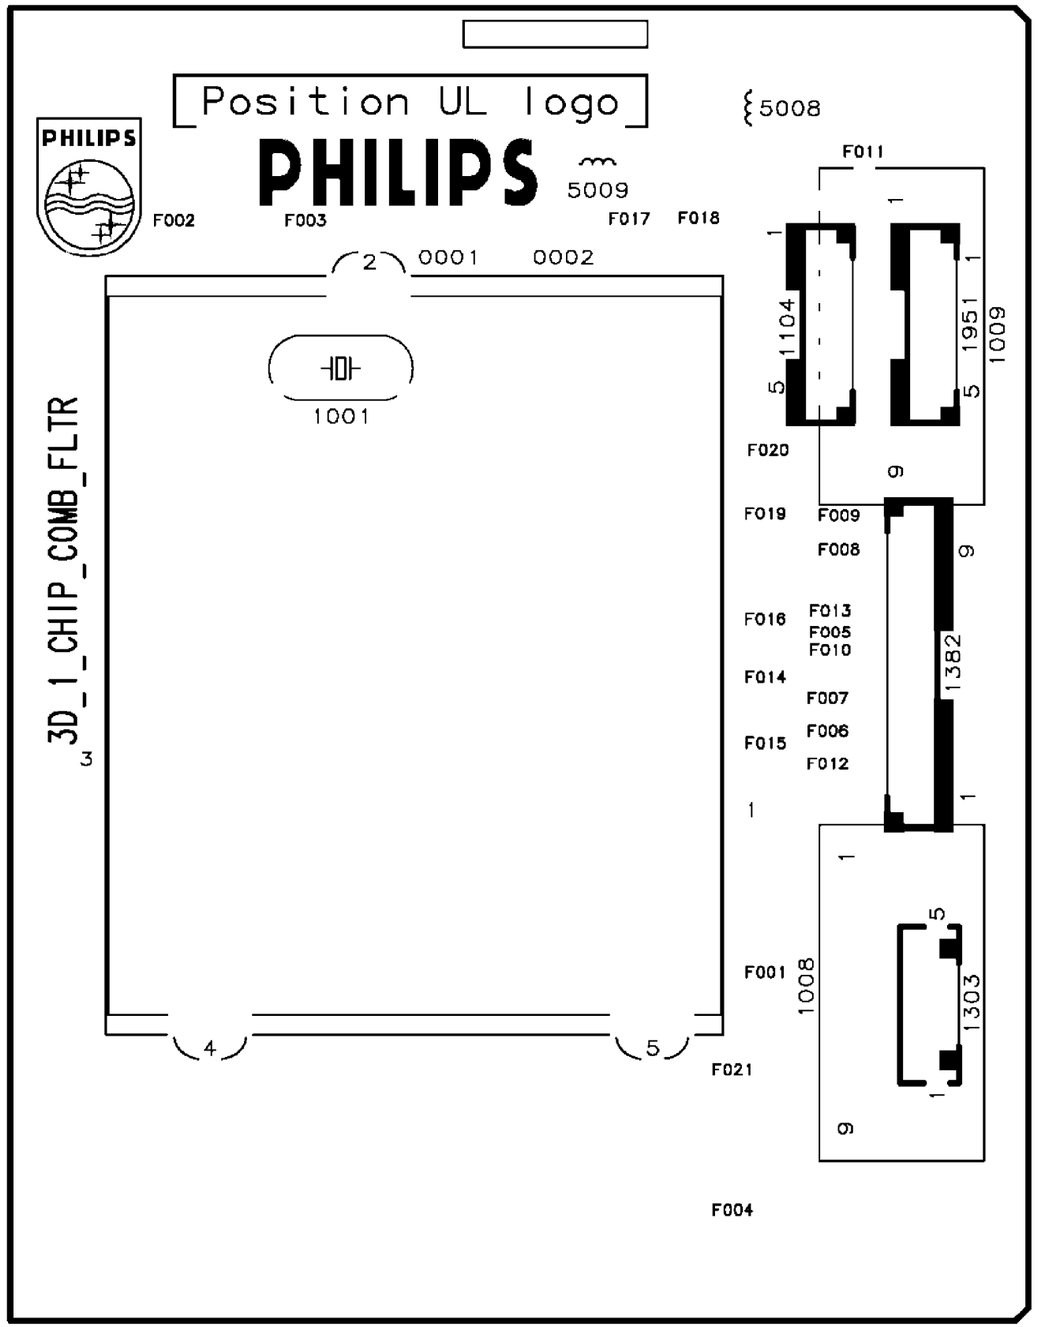

All Models (7621) - 3D Comb Filter Panel CBA (Bottom View)

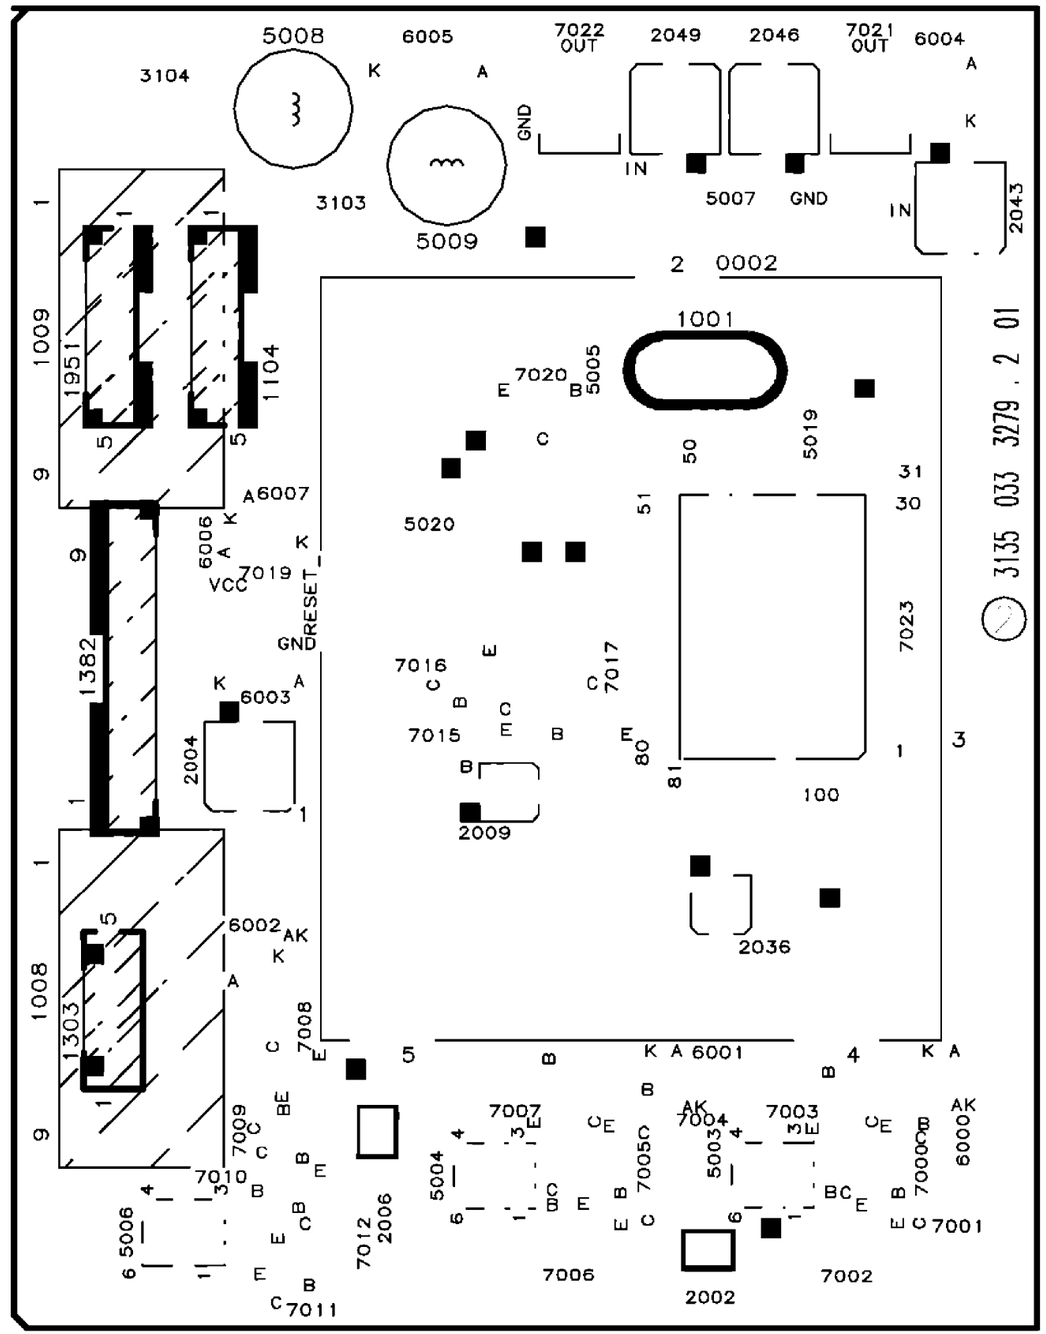

All Models (7621) - DW PIP Panel CBA (Top View)

0200	A4	2328	A2	2434	B3	2838	B6	2885	A4	3348	A3	3416	A3	3813	A5	3864	C5	3897	B5	5332	A3	7801	B5
0201	A6	2331	A2	2436	B4	2841	B6	2886	A4	3352	B1	3431	C3	3814	A5	3865	B5	3898	B5	5333	A2	7802	C4
0205	A5	2333	A2	2437	A6	2842	B5	2887	A4	3353	B2	3432	C3	3816	A5	3866	A4	4301	B2	5334	A3	7803	A4
0207	A1	2348	A2	2438	A6	2843	B5	2888	A4	3354	B2	3438	C3	3817	A5	3868	B4	4303	B3	5350	B2	7804	B4
0209	A3	2349	B1	2439	A6	2844	B5	2889	A5	3355	B1	3451	C3	3818	A5	3869	B4	4304	B3	5351	B2	7805	A4
0236	A2	2350	A1	2440	A6	2851	B6	2890	B4	3356	B1	3452	B3	3821	A4	3871	C6	4306	B3	5352	B1	7806	B6
0237	C5	2351	B2	2502	A1	2853	A6	2892	A5	3364	A2	3453	B3	3822	B4	3872	C6	4307	B3	5401	B6	7807	A6
0255	C2	2355	A2	2503	A1	2857	A5	2893	A5	3366	A2	3456	C3	3824	B4	3873	C6	4308	B3	5402	B6	7808	A5
0272	A3	2373	A1	2504	A1	2858	A5	2894	A5	3372	B3	3457	C3	3825	A5	3874	C6	4309	B3	5501	A1	7809	A5
0273	A6	2380	B2	2505	A1	2859	A5	2897	A5	3374	A2	3458	A4	3826	B4	3877	B4	4310	A2	6801	C6	7810	A5
1327	A2	2385	A1	2506	A1	2860	A4	2898	A5	3384	A2	3460	B3	3827	B4	3878	C6	4311	A2	6802	B6	7824	B4
1333	B3	2386	A2	2507	A1	2861	B4	2899	A5	3385	A2	3461	B3	3828	B5	3879	C6	4312	A3	6803	C6	7829	C4
1334	B4	2390	B2	2508	A1	2862	C4	3301	A3	3386	A2	3462	C4	3829	A4	3880	C4	4337	B3	7201	C1	7832	B5
1352	B2	2391	B2	2509	A1	2863	B5	3306	B2	3387	A1	3463	A2	3831	A4	3881	B4	4403	A3	7301	A2	7871	C6
1501	A1	2392	B2	2811	A5	2864	A5	3316	B2	3388	A1	3502	A1	3832	B5	3882	B5	4438	B3	7307	A3	7874	C6
2261	C3	2393	B3	2812	A5	2866	A5	3317	B2	3389	B3	3503	A1	3833	B5	3883	A4	4820	C6	7331	A3	7876	C6
2265	B1	2401	A3	2813	A5	2867	A5	3318	A2	3390	B2	3504	A1	3834	B5	3886	A4	4823	A6	7332	B1	7891	A4
2301	A3	2402	A3	2816	A5	2868	A4	3321	A2	3391	A2	3506	A1	3836	B5	3887	A4	4825	A5	7337	B3	7892	B6
2304	B3	2403	A3	2821	A5	2869	A4	3322	A2	3401	A3	3508	A1	3837	B5	3888	A4	4827	B5	7368	A2	7893	B6
2306	B3	2404	A3	2823	A5	2871	A4	3327	B2	3402	A3	3804	B5	3838	B5	3889	A5	4828	B5	7385	A2	7894	B5
2311	B3	2405	A3	2824	A5	2872	A5	3333	A3	3404	A4	3805	A6	3852	B5	3890	A5	4829	B4	7386	A2		
2316	B2	2411	A2	2827	A5	2873	A5	3334	A3	3411	A3	3806	A6	3853	B5	3891	B4	4830	B4	7401	A3		
2317	A3	2412	A3	2828	B5	2874	A5	3336	A3	3412	A3	3807	A5	3854	B5	3893	B5	4831	A5	7403	B3		
2319	A3	2415	A2	2833	A5	2876	A5	3340	B3	3413	A2	3809	A5	3855	B5	3894	B6	4832	A4	7434	C5		
2322	C3	2431	A3	2834	A5	2877	B4	3346	A3	3414	A3	3810	A5	3862	C5	3895	B5	4833	B5	7435	C5		
2327	A2	2432	A3	2836	A4	2879	C6	3347	B3	3415	A3	3812	A5	3863	B5	3896	B6	5309	B3	7501	A1		

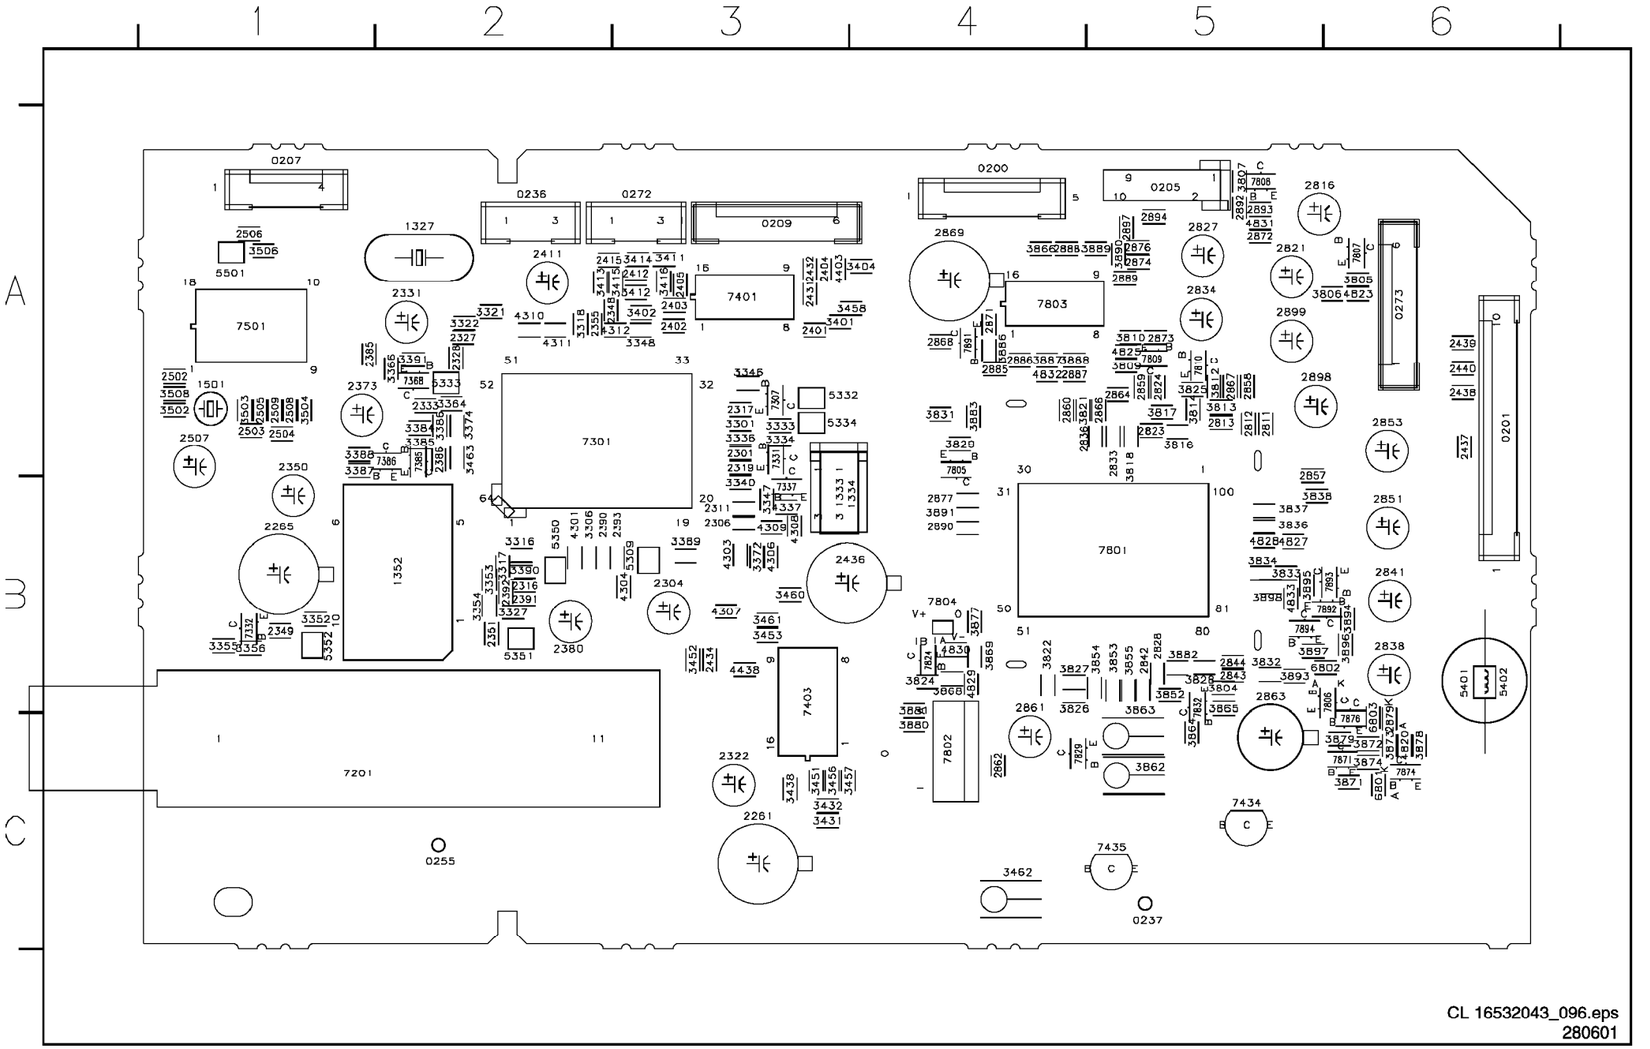

CL 16532043_096.eps
280601

All Models (7621) - DW PIP Panel CBA (Top View)

2262	C5	2338	A5	2814	A2	2848	B2	3267	B6	3328	A4	3382	A5	3501	A6	3844	A2	4305	B4	4826	A2	6301	B5
2269	C5	2342	A4	2817	A2	2849	B2	3268	B6	3329	B4	3383	A5	3507	A6	3846	A1	4313	A5	4834	C3	6412	A4
2302	B4	2345	A4	2818	B3	2852	B2	3270	C6	3330	B4	3403	A5	3509	A6	3847	A2	4314	B5	5261	B5	6415	A4
2303	B4	2354	A5	2819	A2	2854	B2	3302	A4	3335	B4	3405	A4	3510	A6	3848	A2	4315	B5	5348	B5	6436	C3
2309	B4	2356	A5	2822	B3	2856	A1	3305	B4	3338	A4	3417	B3	3512	A6	3849	A2	4401	A4	5349	B5	7305	B5
2312	B5	2357	A5	2825	B2	2878	B3	3311	B5	3339	A4	3418	B4	3513	A6	3851	A2	4402	A4	5816	A2	7402	B4
2313	B4	2372	A5	2826	B3	2882	B2	3312	B5	3341	A4	3419	C4	3801	A3	3856	C3	4419	C4	5818	A2	7411	A4
2314	B5	2374	B5	2829	B2	2883	B3	3313	A5	3344	A4	3422	C3	3802	B3	3857	C3	4423	B4	5827	B2	7412	A4
2321	A4	2375	A5	2831	B2	2891	A3	3314	A5	3350	A5	3423	C3	3803	B2	3858	C3	4424	C4	5834	A2	7421	C4
2324	A4	2376	A5	2832	A1	2895	A2	3315	A5	3351	A5	3424	C4	3808	A2	3870	B2	4434	C2	5839	B2	7422	C3
2332	A5	2377	A5	2837	B2	2896	A2	3323	A4	3365	A5	3434	C2	3811	A2	3876	B3	4437	C2	5848	B2	7438	C3
2334	A5	2501	A6	2839	B2	3263	B6	3324	A4	3370	A5	3436	C3	3823	A2	3884	A1	4821	B3	5849	B2	7502	A6
2335	A4	2511	A6	2846	A2	3264	B6	3325	A4	3371	B5	3437	C2	3839	A1	3885	A2	4822	B1	5851	B2	7828	A1
2336	A4	2512	A6	2847	B2	3265	B6	3326	B5	3381	A5	3439	C3	3843	A1	3892	A3	4824	A2	5853	B1	7895	C3

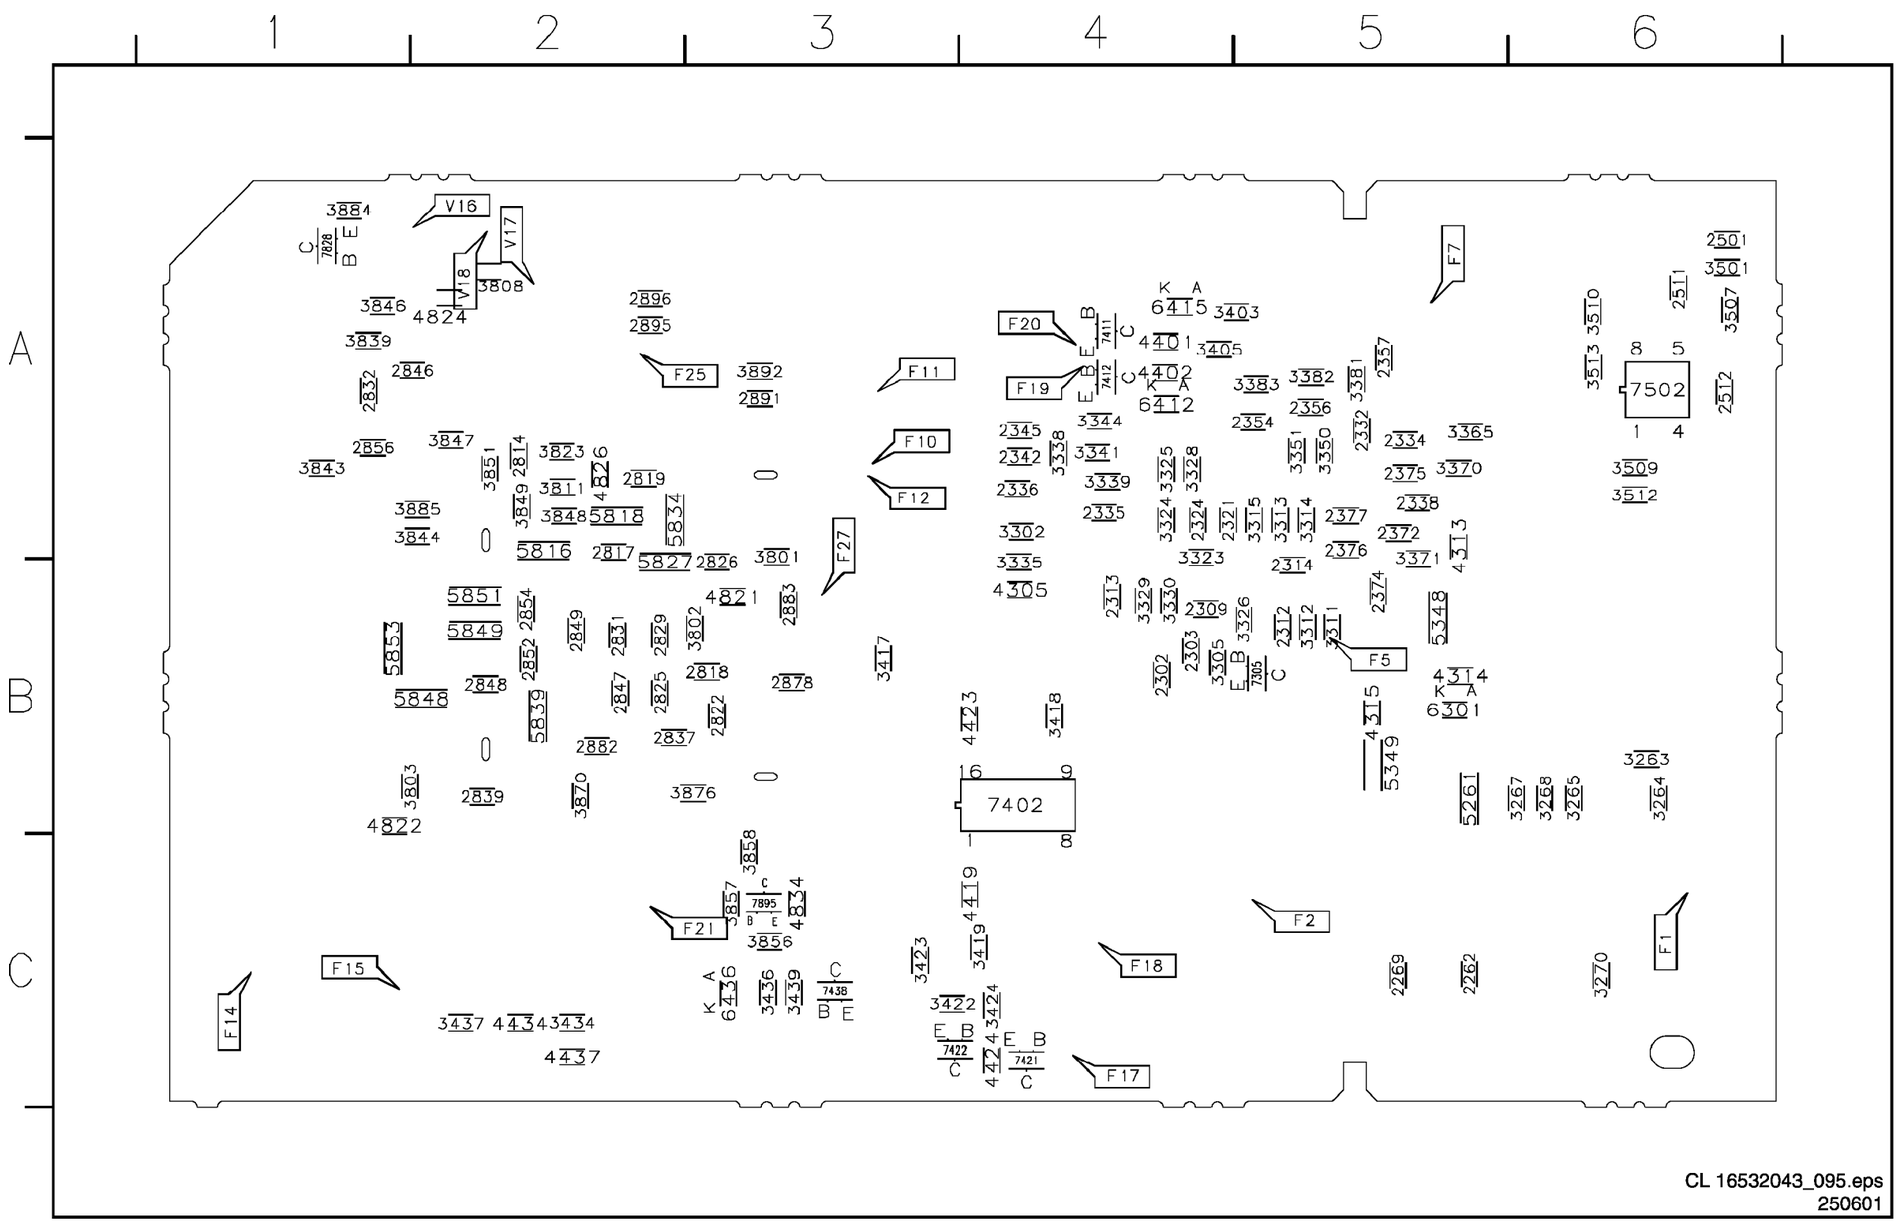
1
2
3
4
5
6
A
B
C
V16
V17
V18
3808
4824
3884
7828
3846
3839
2846
2832
2896
2895
F25
3892
2891
F11
F10
F12
F27
F20
F19
7411
7412
6415
6412
4401
4402
3403
3405
3383
3382
2357
2356
2354
3384
2345
2342
2336
3338
3341
3339
2335
3302
3335
4305
3325
3328
3324
2324
2321
3315
3313
3314
3323
2314
2313
3329
3330
2309
3326
2303
2302
3305
7300
2312
3312
3311
F5
2374
2377
2376
2372
3371
4313
5348
4314
6301
4315
5349
F7
2501
3501
3510
3513
2511
3507
8
5
7502
1
4
3509
3512
3365
2334
2375
3370
2338
3263
3264
3267
3268
3265
5261
7402
16
9
8
1
3858
3857
7895
4834
3856
F21
F15
F14
3437
4434
4437
3436
3439
7438
3423
3419
4419
3422
3424
7422
7421
4423
3418
3417
F18
F17
F2
F1
2269
2262
3270
2883
2854
2852
2849
2831
2829
3802
2818
2878
2822
2837
2882
2847
2825
2839
3870
3876
4822
2856
3847
3843
3851
2814
3823
3826
3811
4826
2819
3849
3848
5818
5834
3885
3844
5816
2817
5827
2826
3801
4821
5851
5849
5853
5852
5848
2848
5839
3803
5836
7310
7311
7312
7313
7314
7315
7316
7317
7318
7319
7320
7321
7322
7323
7324
7325
7326
7327
7328
7329
7330
7331
7332
7333
7334
7335
7336
7337
7338
7339
7340
7341
7342
7343
7344
7345
7346
7347
7348
7349

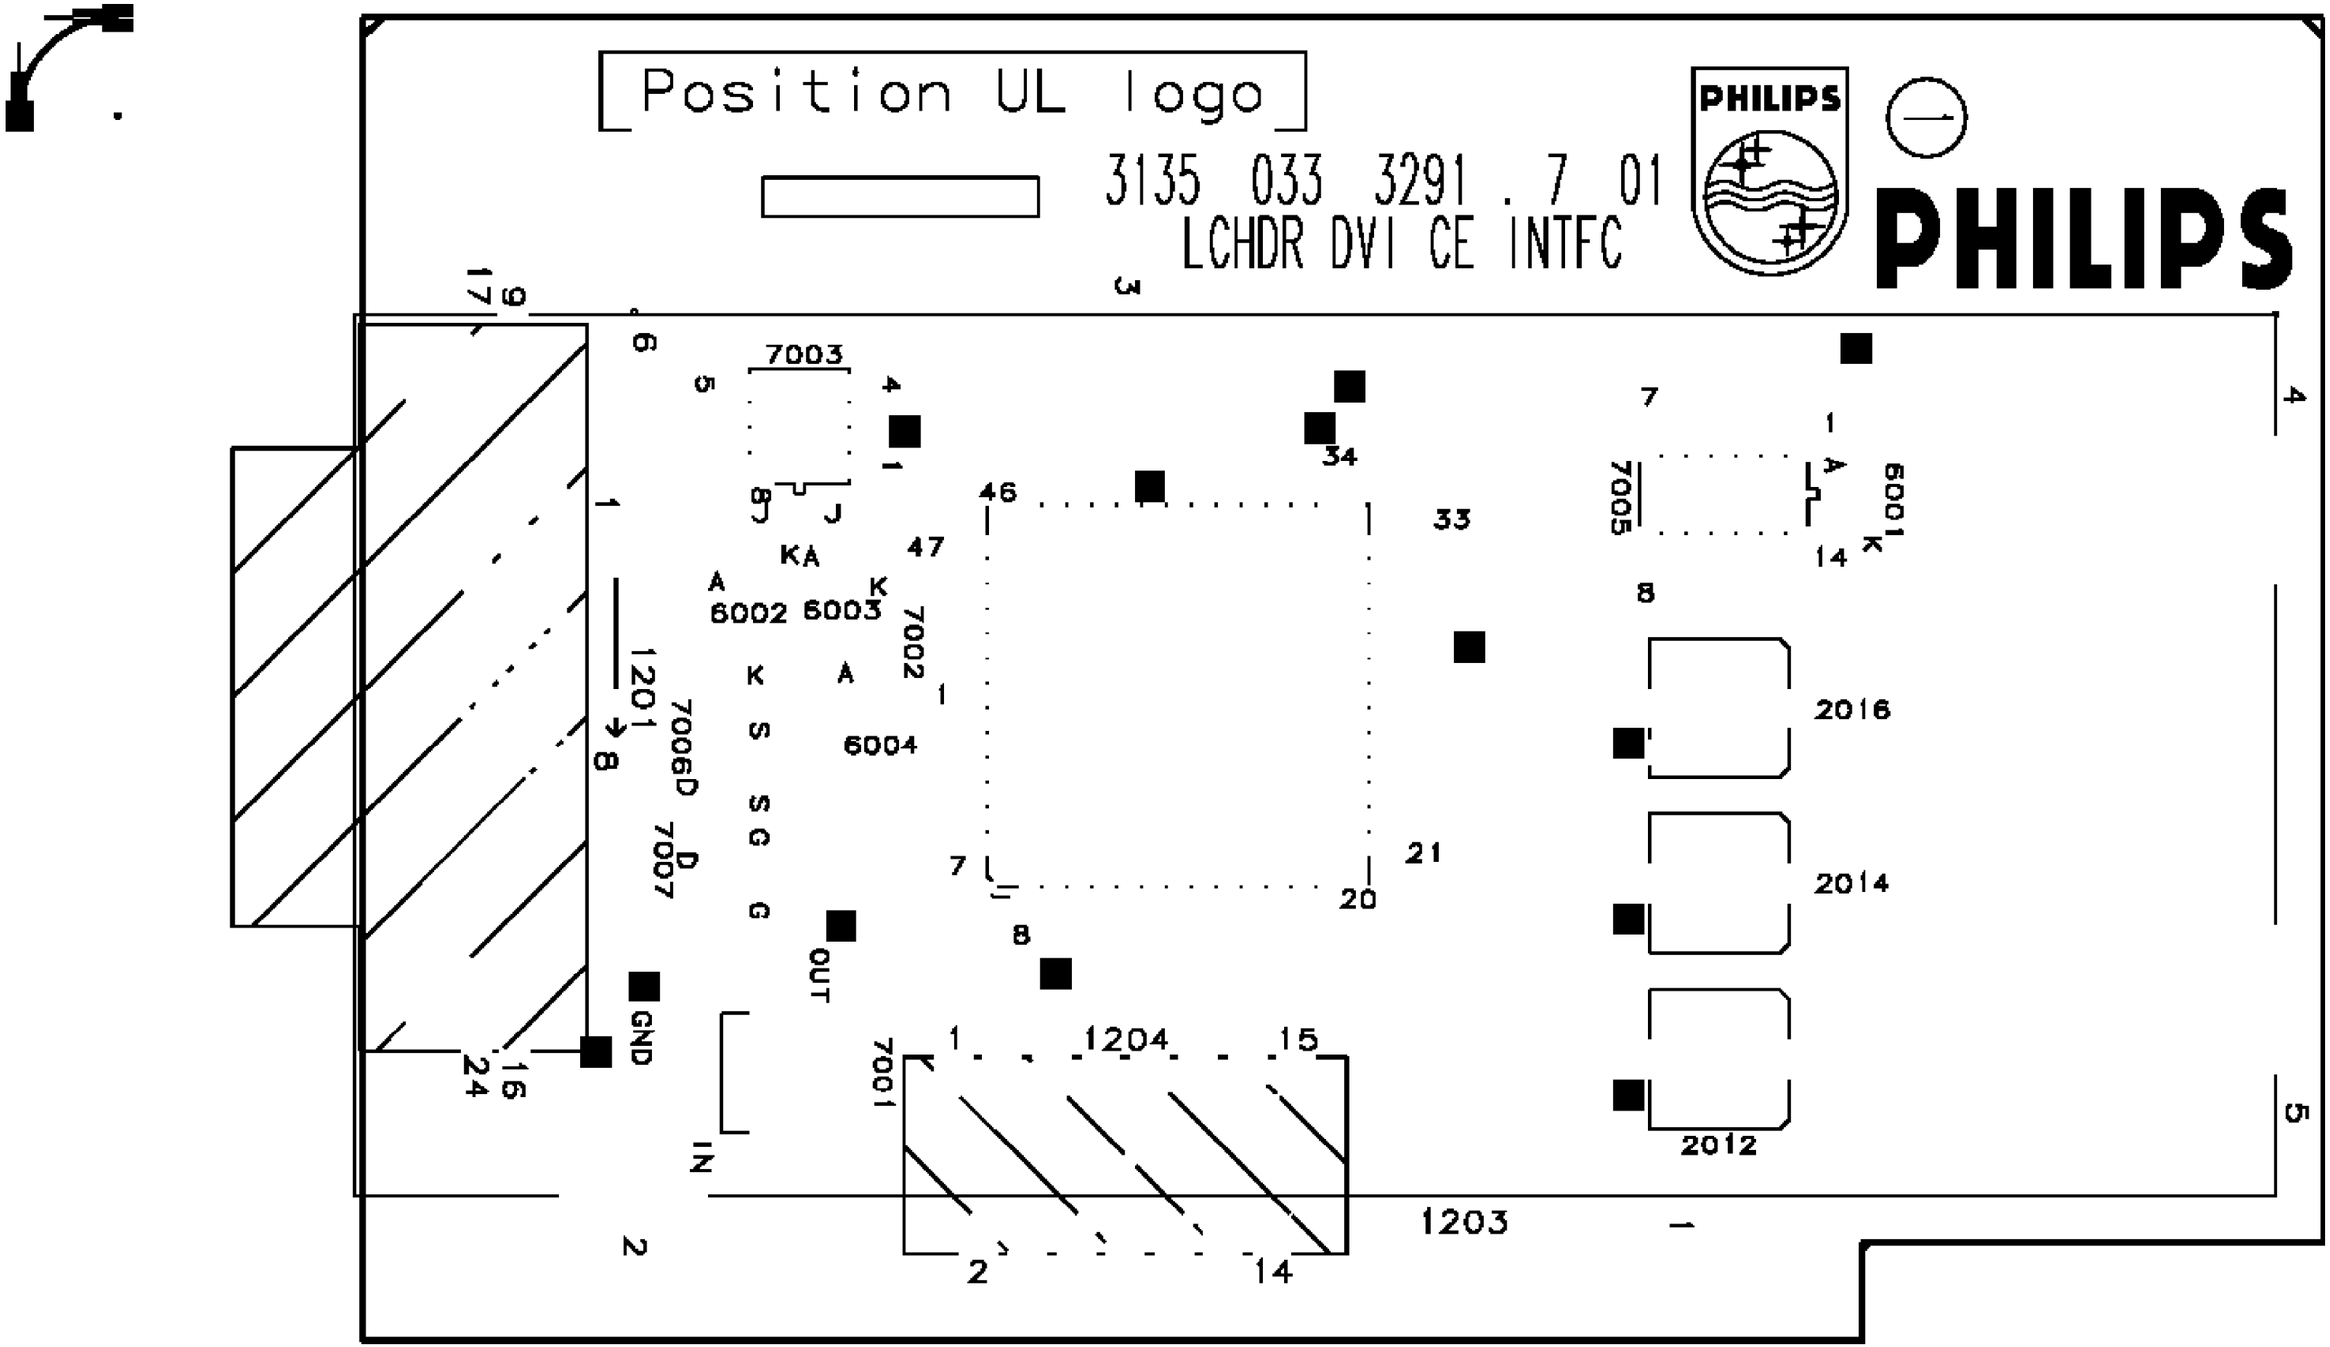
Position UL logo
3135 033 3291 . 7 01
LCHDR DVI CE INTFC
PHILIPS
PHILIPS
7003
6002
6003
6004
7002
7006
7007
7005
6001
2016
2014
2012
7001
1203
1204
OUT
IN
GND

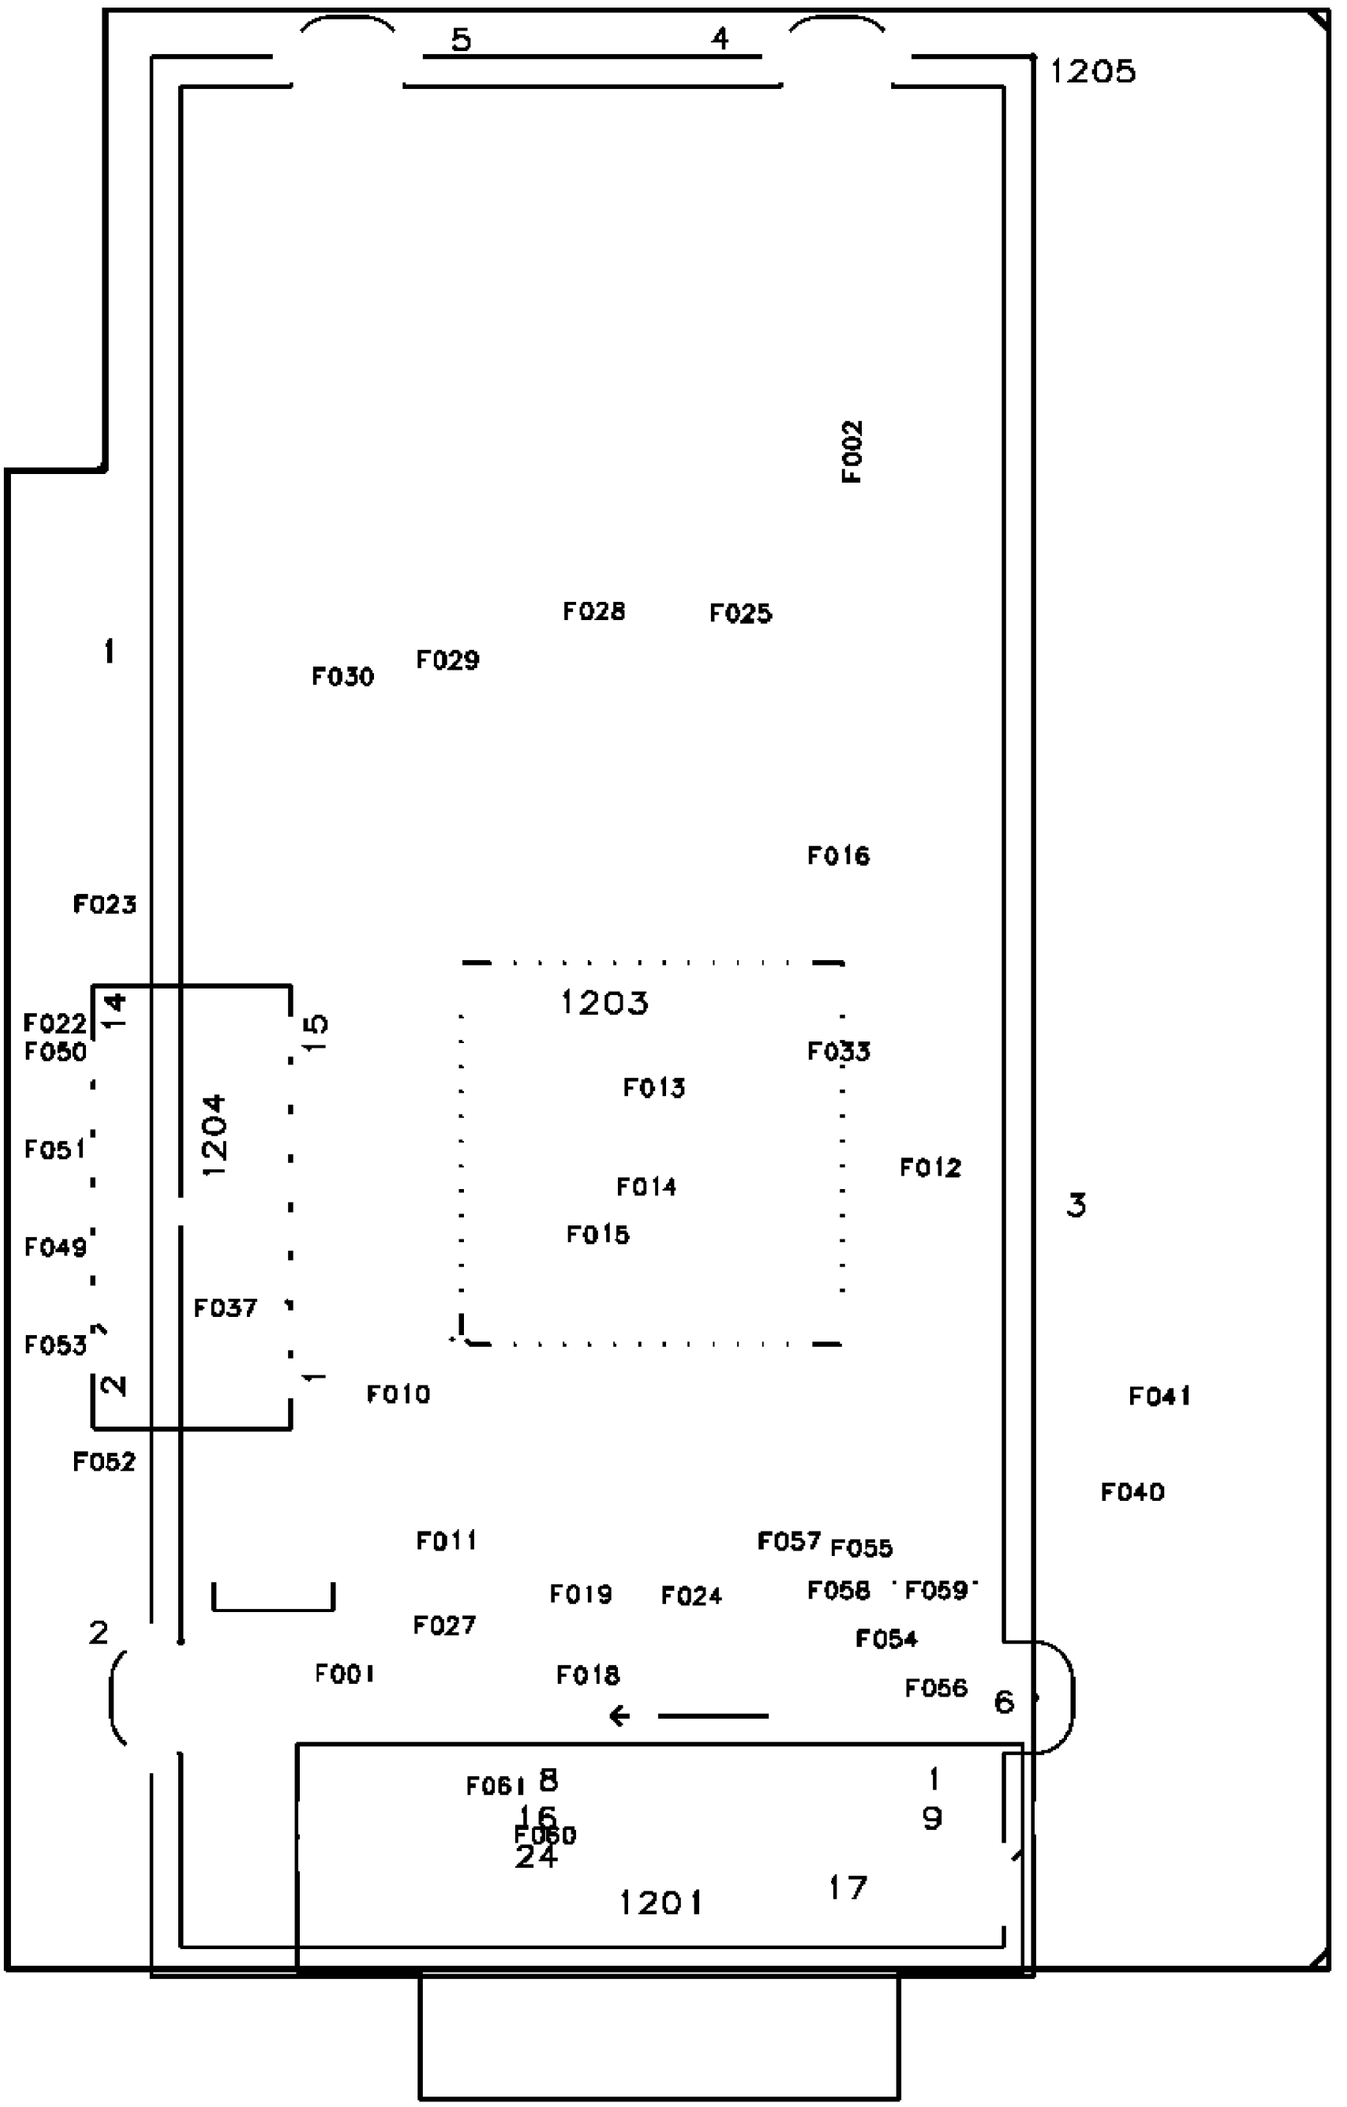
5
4
1205
F002
F028
F025
1
F030
F029
F016
F023
1203
F022
F050
14
15
F033
F013
1204
F051
F012
F014
3
F049
F015
F037
F053
2
1
F010
F041
F052
F040
F011
F057
F055
F019
F024
F058
F059
2
F027
F054
F001
F018
F056
6
F061
8
1
16
9
F060
24
1201
17

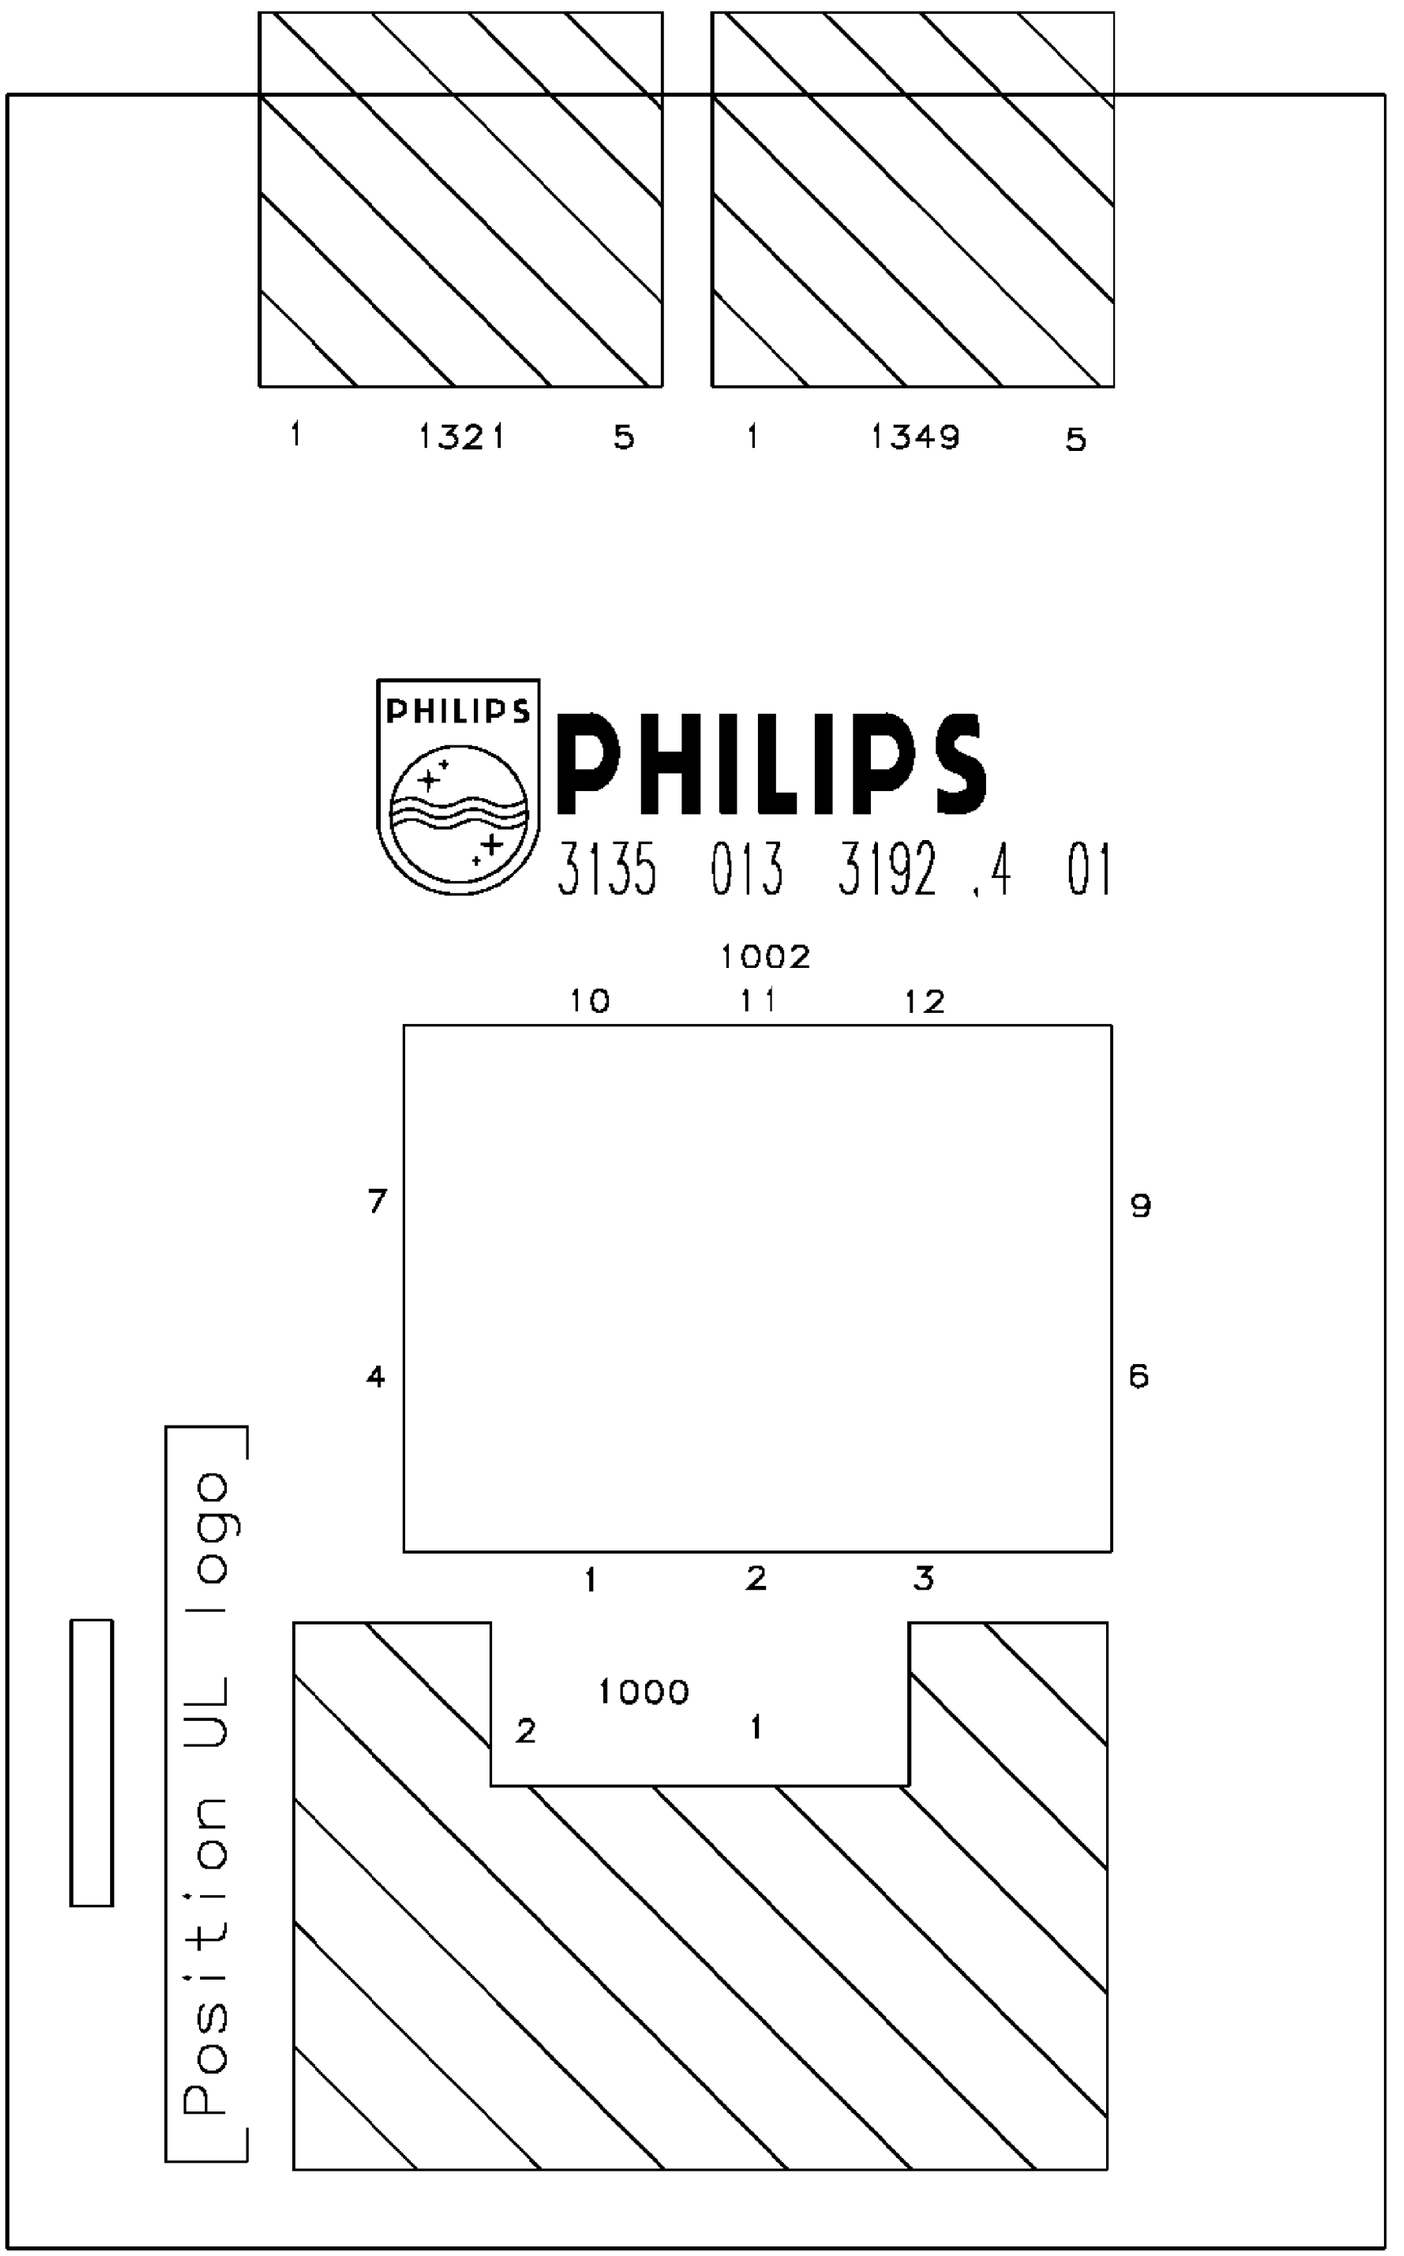

All Models (7621) - Rear Switch Panel (Top View only)

43" CABINET EXPLODED VIEW

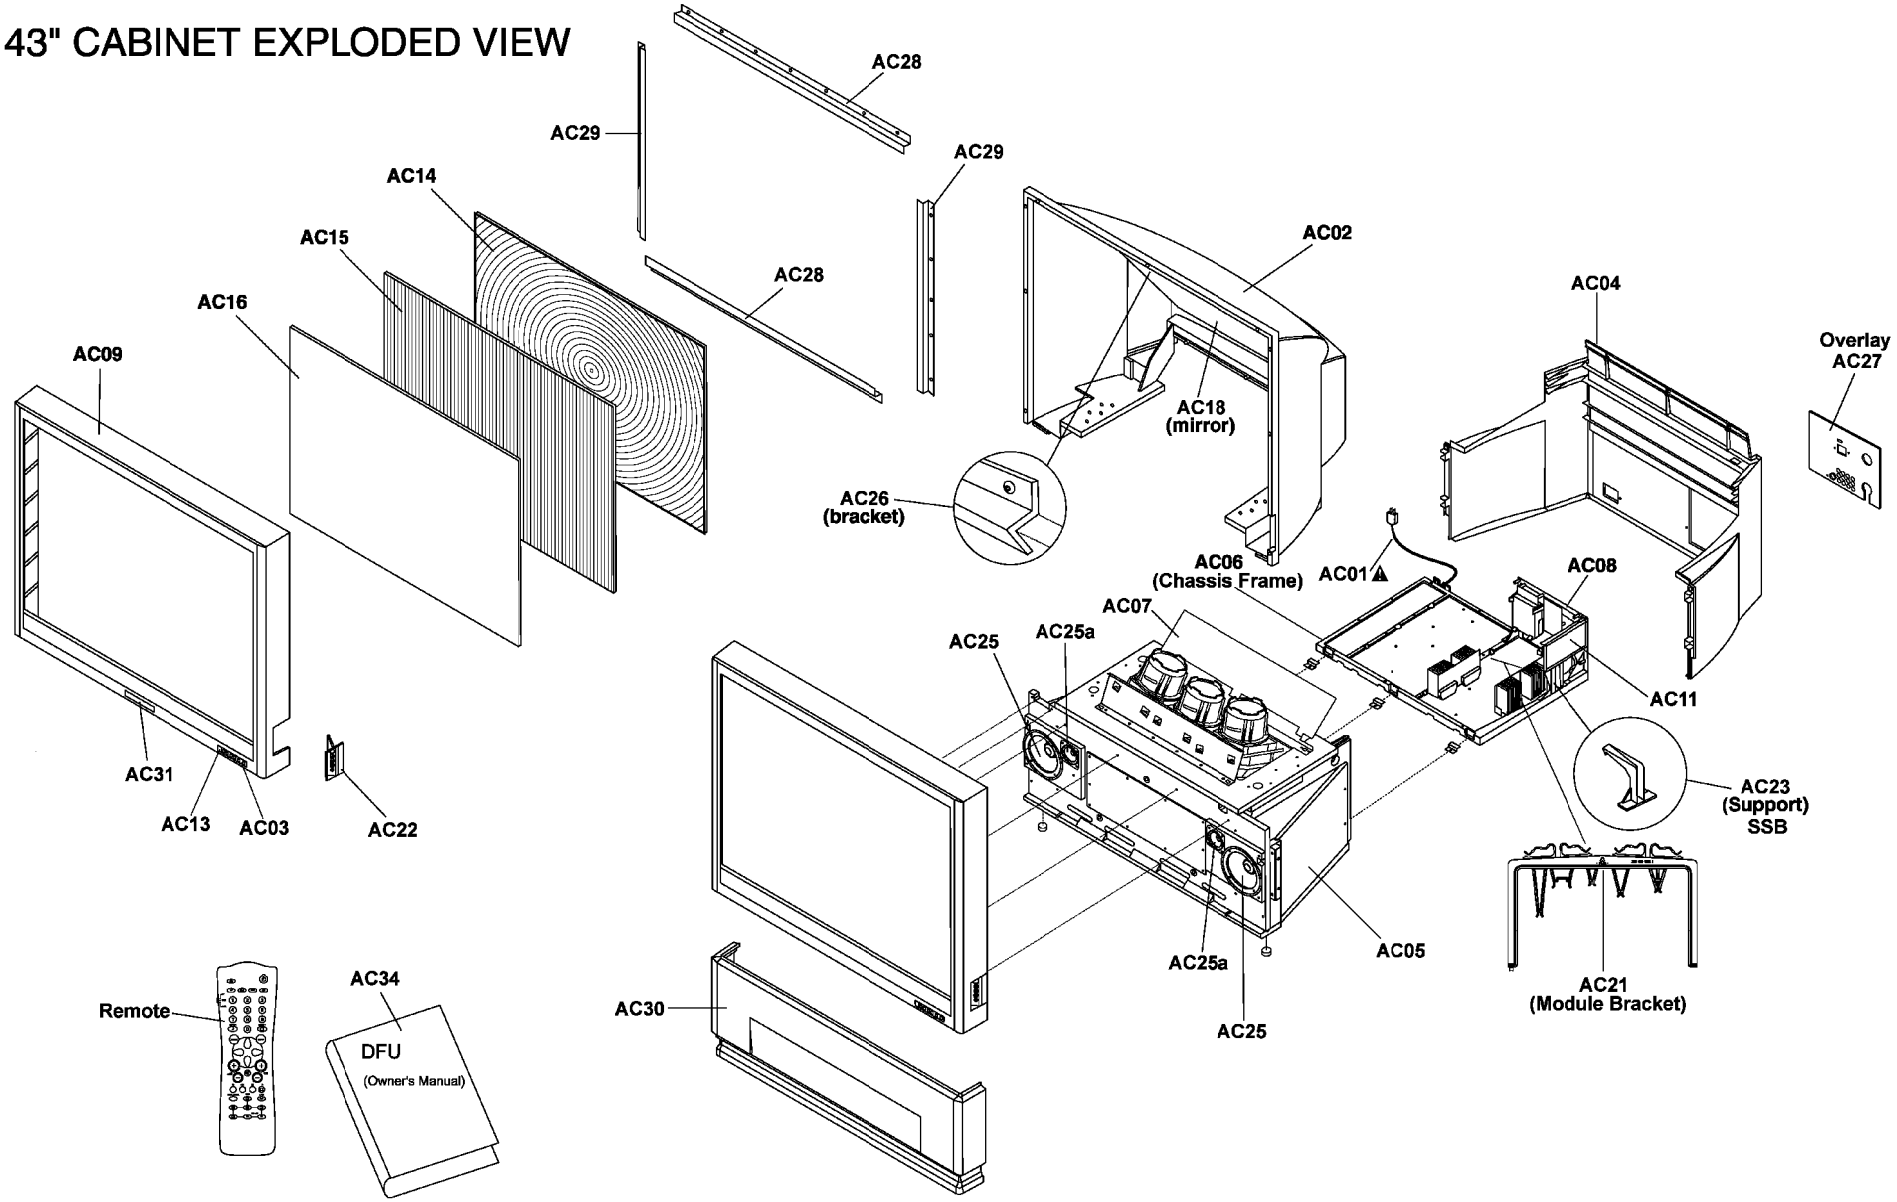

43" Cabinet Exploded View

46"/51"/55"/60" (16:9) CABINET EXPLODED VIEW

NOTE: NOT ALL ITEMS SHOWN ARE AVAILABLE FOR ALL MODELS.

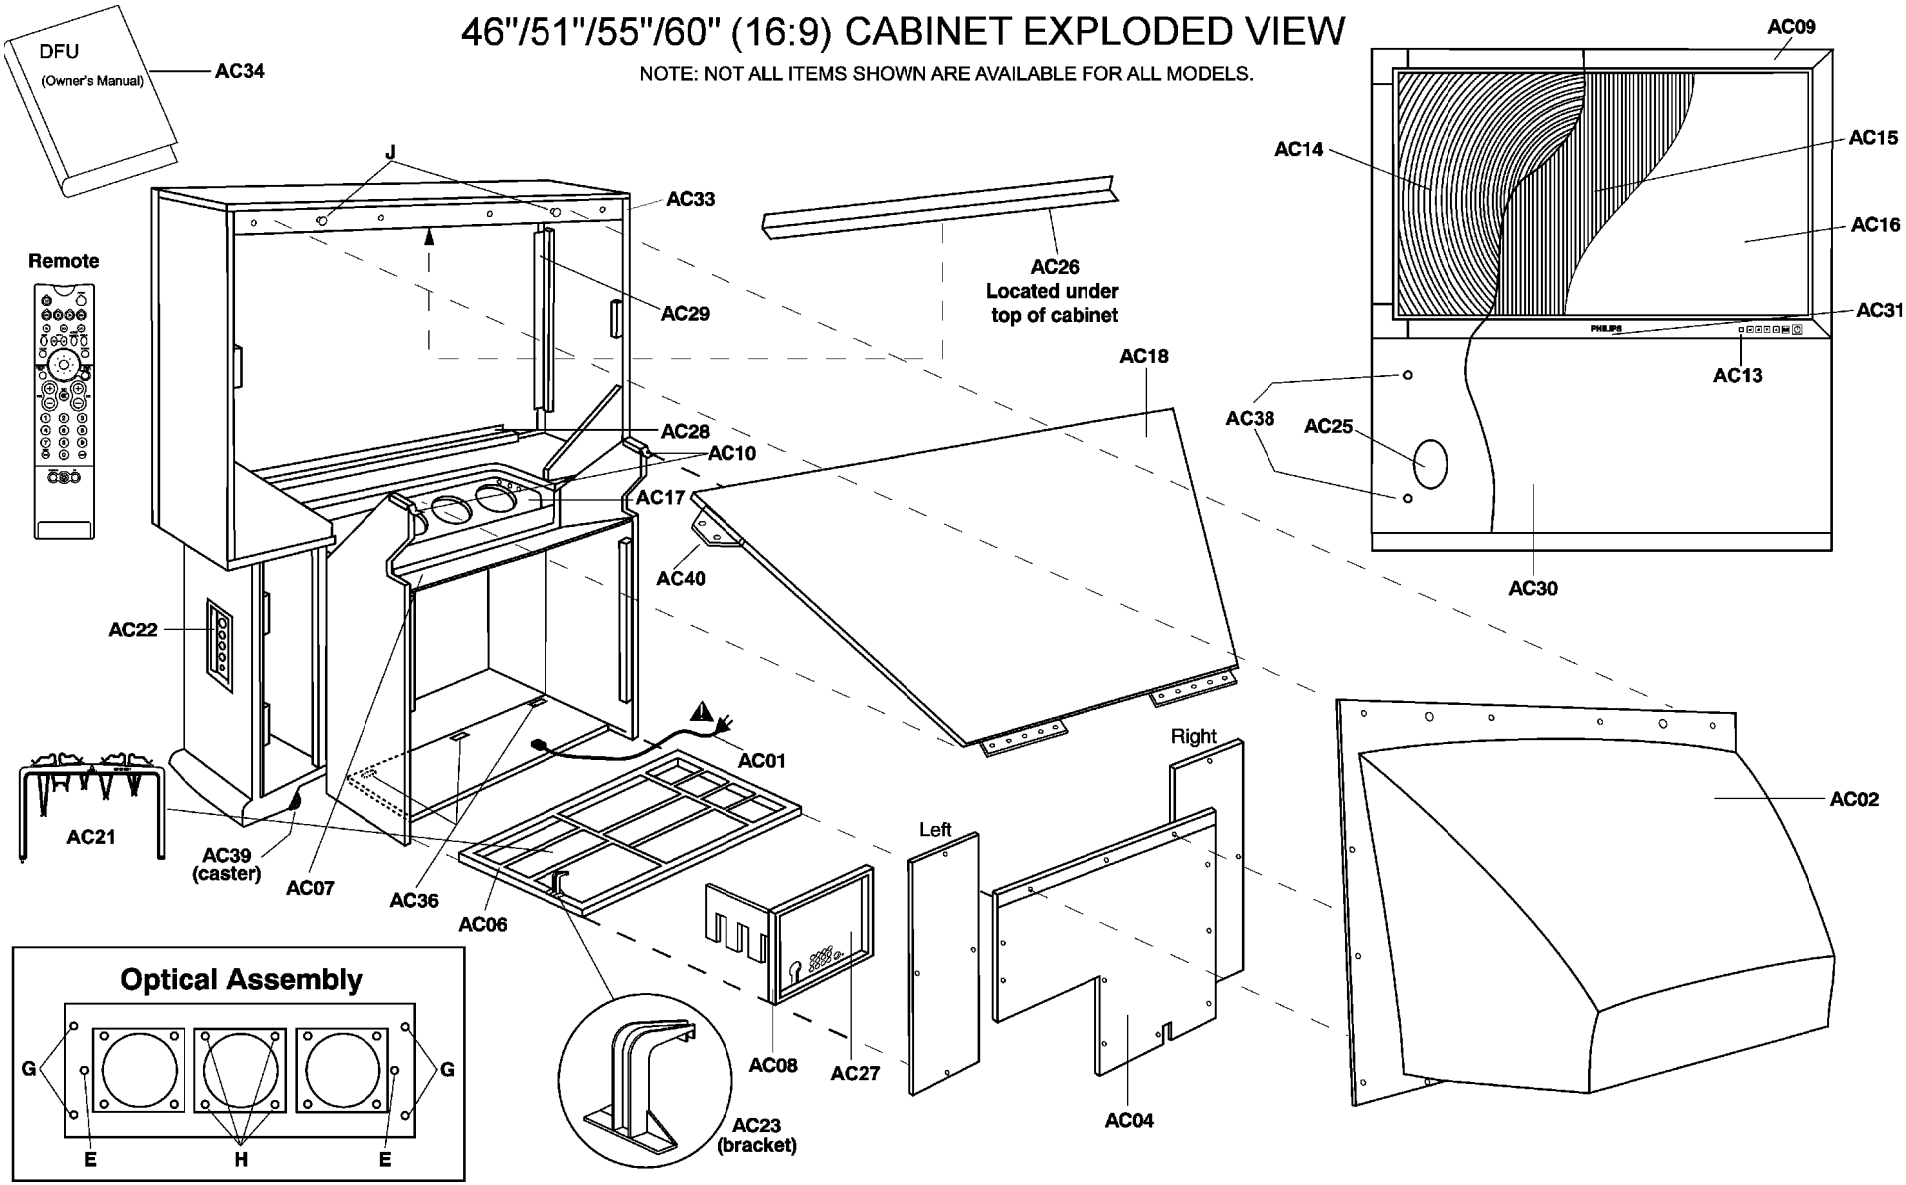

46/51/55/60" Cabinet Exploded View

50"/ 60" CABINET EXPLODED VIEW

NOTE: NOT ALL ITEMS SHOWN ARE AVAILABLE FOR ALL MODELS.

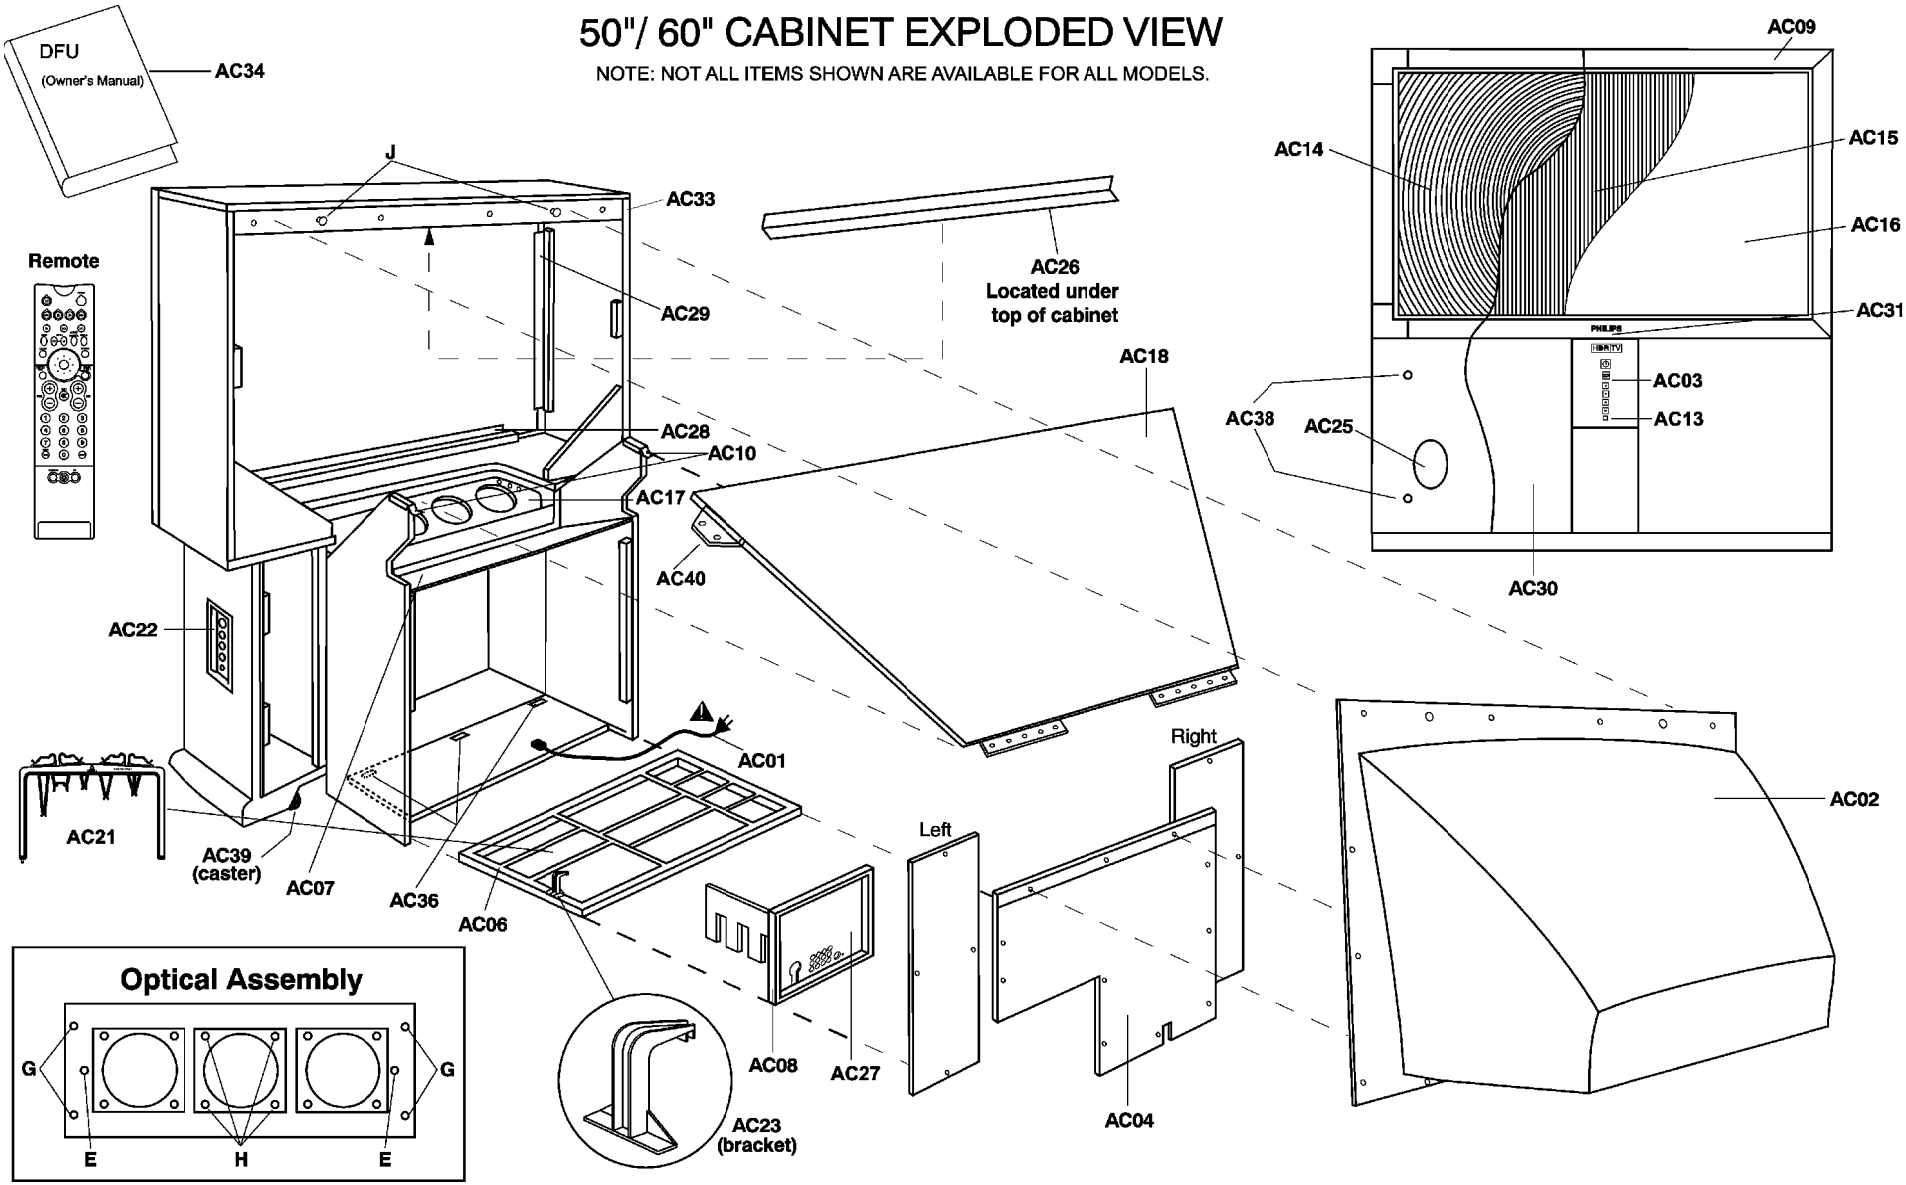

50/60" Cabinet Exploded View

CRT Assemblies

X10 - Ethylen Glycol
(Coolant Fluid, Not Shown)

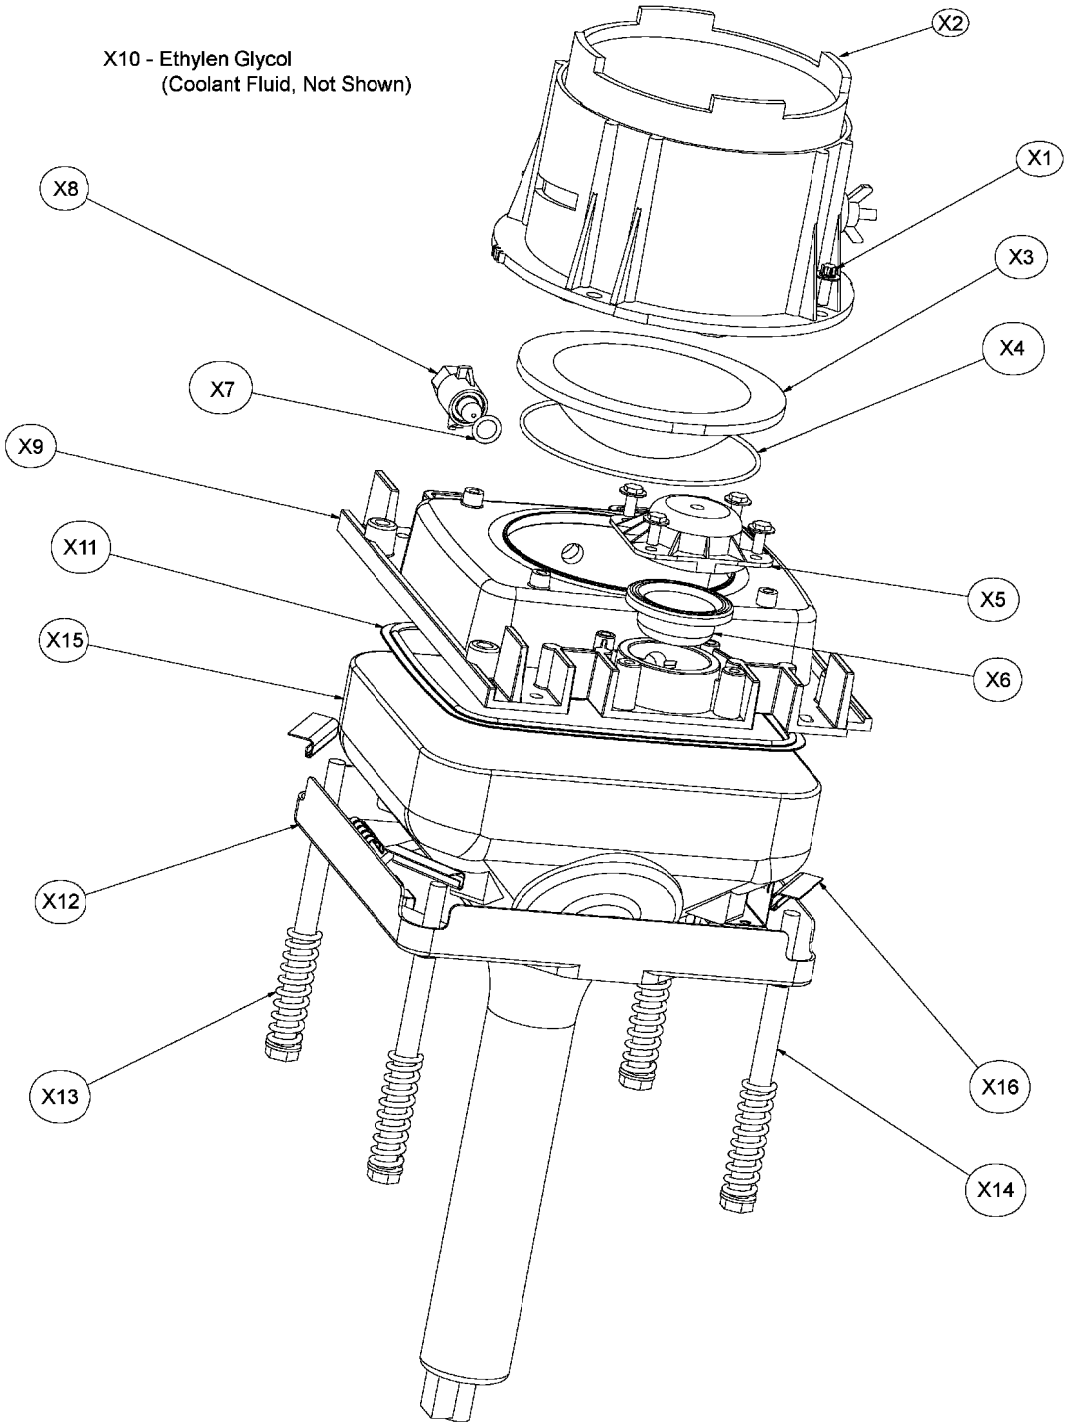

CRT Assembly Exploded View

43PP9202/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Backcover, Upper, 43	3135 034 00311	
AC03	Customer Controls.	3135 017 07622	
AC04	Backcover, Lower, 43	3135 034 00652	
AC05	Cabinet Assembly NAFTA 43.	3135 037 50603	
AC06	Frame, Chassis	3135 034 00605	
AC07	Rear Light Barrier, 43	3135 013 03732	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Cabinet, Front	3135 037 50991	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Fresnel Lens 43.	3135 014 10311	
AC15	Lenticular Screen. 43.	3135 033 20141	
AC16	Protector, Screen, 43.	3135 034 00521	
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50681	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror Mounting, 43	3135 011 04611	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, HORZ 43.	3135 034 00821	
AC29	Retainer, Screen, VERT 43.	3135 034 00831	
AC30	Grill Assembly, 43V.	3135 037 50661	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00771	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
S DEFL	Deflection Yoke DAV4362M (Green)	2422 549 45211	
S DEFL	Deflection Yoke DAV4363M (Red & Blue)	2422 549 45212	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta, 240	3135 037 50701	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	
X9	Coupler, 43 Red & Blue (Part of CRT Asm.)	3135 011 04473	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

7710	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9147	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

H.O.P. Panel Parts

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP9202/17F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin.	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC03	Customer Control Panel	3135 037 51412
AC04	Backcover, Lower, 43	3135 034 00652
AC06	Frame, Chassis	3135 034 00606
AC07	Rear Light Barrier, 43	3135 013 03732
AC08	Frame, Rear Jack, 2-Tuner	3135 034 02421
AC09	Cabinet, Front	3135 037 51861
AC11	Frame, PIP	3135 014 11101
AC14	Fresnel Lens, 43	3135 033 20171
AC15	Lenticular Screen. 43.	3135 033 20141
AC16	Protector, Screen, 43.	3135 034 00521
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50681
AC23	Grill Assembly, 43V.	3135 037 50661
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Mounting (2 Used)	3135 011 04612
AC27	Overlay, PIP Panel	3135 030 00032
AC28	Retainer, Screen, Horz (2 Used).	3135 034 01931
AC29	Retainer, Screen Vert (2 Used).	3135 034 01941
AC31	Nameplate.	3135 015 02511
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391
AC38	Baffle Mounting Cup.	3135 013 02761
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC48	Foot	3135 010 09741
S DEFL	Deflection Yoke, BY01716 (3 Used).	2422 549 45593
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 240	3135 037 50701
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281
X9	Coupler, 43 & 39W Red & Blue, (Part of CRT Asm.).	3135 011 04474

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0382	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypr opylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 2u2.	2422 535 91014
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS216.	9340 255 30115
6808	Diode, Signal, BAS216.	9340 255 30115
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS216.	9340 255 30115
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS216.	9340 255 30115
6818	Diode, Signal, BAS216.	9340 255 30115
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS216.	9340 255 30115
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS216.	9340 255 30115
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS216.	9340 255 30115
6830	Diode, Signal, BAS216.	9340 255 30115
6831	Diode, Signal, BAS216.	9340 255 30115
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS216.	9340 255 30115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS216.	9340 255 30115
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS216.	9340 255 30115
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS216.	9340 255 30115
6913	Diode, Signal, BAS216.	9340 255 30115
6914	Diode, Signal, BAS216.	9340 255 30115
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360

S = Safety Part Be sure to use exact replacement part.

7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

ACS Manual Assembly

1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2500 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2501 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2502 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2505 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2506 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2507 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2509 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2510 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2511 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2519 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2520 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2521 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2529 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2601 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2602 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2607 Cap, 47n, 10%, 25V, Ceramic. 3198 023 04730
2615 Cap, 100n, 5%, 16V, Polypropylene. . 2020 319 90005
2616 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2617 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2618 Cap, 2u2, +80/-20%, 10V, Ceramic . . 3198 017 22250
2619 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2620 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2621 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2626 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2627 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2628 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2630 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2631 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2632 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2633 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2634 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2635 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2636 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2637 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2638 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2639 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2644 Cap, 100p, 5%, 50V, Ceramic. 3198 016 01010
2700 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2701 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2702 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2704 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2710 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2711 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2714 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2720 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2721 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2724 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2731 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2740 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2741 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2750 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2800 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2802 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2804 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2806 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2807 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2809 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2810 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2811 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2812 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2813 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2814 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2815 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2816 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2901 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2902 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2903 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2904 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2905 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2906 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2909 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2910 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2911 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2912 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2913 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2922 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2923 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2924 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2931 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2933 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2944 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2945 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2951 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2952 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2953 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2957 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2958 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2961 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2963 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2968 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
3150 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3151 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3160 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3161 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3170 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3171 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3180 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3181 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3185 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3186 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3247 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3248 Res, 470K, 5%, 1/10W, Metalized Glass 3198 021 54740
3251 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3261 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3271 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3281 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3286 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3320 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3321 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3323 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3324 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3325 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3326 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3331 Res, 1M, 5%, 1/10W, Metalized Glass. 3198 021 51050
3332 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3333 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3335 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3336 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3339 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3410 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3411 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3412 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3413 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3414 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3415 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3416 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3418 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3419 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3420 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3421 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3422 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3424 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3425 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710
3426 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3427 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3428 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3429 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3430 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3431 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3432 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3433 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3434 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3435 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3436 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3438 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3439 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3441 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3442 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3443 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3444 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3445 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP9202/84 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Backcover, Upper, 43	3135 034 00311	
AC03	Customer Controls.	3135 017 07622	
AC04	Backcover, Lower, 43	3135 034 00652	
AC05	Cabinet Assembly NAFTA 43.	3135 037 50603	
AC06	Frame, Chassis	3135 034 00605	
AC07	Rear Light Barrier, 43	3135 013 03732	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Cabinet, Front	3135 037 50991	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Fresnel Lens 43.	3135 014 10311	
AC15	Lenticular Screen. 43.	3135 033 20141	
AC16	Protector, Screen, 43.	3135 034 00521	
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50681	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror Mounting, 43	3135 011 04611	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, HORZ 43.	3135 034 00821	
AC29	Retainer, Screen, VERT 43.	3135 034 00831	
AC30	Grill Assembly, 43V.	3135 037 50661	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00771	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
S DEFL	Deflection Yoke DAV4362M (Green)	2422 549 45211	
S DEFL	Deflection Yoke DAV4363M (Red & Blue)	2422 549 45212	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta, 240	3135 037 50701	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	
X9	Coupler, 43 Red & Blue (Part of CRT Asm.)	3135 011 04473	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

H.O.P. Panel Parts

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP920201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Backcover, Upper, 43	3135 034 00311	
AC03	Customer Controls.	3135 017 07622	
AC04	Backcover, Lower, 43	3135 034 00652	
AC05	Cabinet Assembly NAFTA 43.	3135 037 50603	
AC06	Frame, Chassis	3135 034 00605	
AC07	Rear Light Barrier, 43	3135 013 03732	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Cabinet, Front	3135 037 50991	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Fresnel Lens 43.	3135 014 10311	
AC15	Lenticular Screen. 43.	3135 033 20141	
AC16	Protector, Screen, 43.	3135 034 00521	
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50681	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror Mounting, 43	3135 011 04611	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, HORZ 43.	3135 034 00821	
AC29	Retainer, Screen, VERT 43.	3135 034 00831	
AC30	Grill Assembly, 43V.	3135 037 50661	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00771	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
S DEFL	Deflection Yoke DAV4362M (Green)	2422 549 45211	
S DEFL	Deflection Yoke DAV4363M (Red & Blue)	2422 549 45212	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta, 240	3135 037 50701	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	
X9	Coupler, 43 Red & Blue (Part of CRT Asm.)	3135 011 04473	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730		6819	Zener Diode, 18 volt	3198 010 21890	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020		6820	Zener Diode, 10 volt	9340 386 80115	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240		6821	Diode, Signal, BAS316.	3198 010 10630	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225		6822	Diode, Rect, BYV95C	9335 001 80133	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		6823	Diode, Signal, BAS316.	3198 010 10630	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		6824	Zener Diode, 10 volt	9340 386 80115	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010		6825	Zener Diode, 10 volt	9340 386 80115	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020		6826	Zener Diode, 18 volt	3198 010 21890	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830		6827	Diode, Rect, BYV27-200.	9335 526 80133	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090		6828	Zener Diode, 10 volt	9340 386 80115	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720		6829	Diode, Signal, BAS316.	3198 010 10630	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225		6830	Diode, Signal, BAS316.	3198 010 10630	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090		6831	Diode, Signal, BAS316.	3198 010 10630	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780		6832	Zener Diode, 15 volt	9340 387 20115	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040		6901	Diode, Signal, BAS316.	3198 010 10630	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		6902	Zener Diode, 18 volt	3198 010 21890	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		6903	Zener Diode, 4.7 volt.	3198 010 24780	
S 5300	Transformer, US54107-00.	2422 531 02507		6904	Diode, Signal, BAS316.	3198 010 10630	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6905	Zener Diode, 3.9 volt.	3198 010 23980	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6906	Zener Diode, 8.2 volt.	3198 010 28280	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6908	Diode, Signal, BAS316.	3198 010 10630	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6909	Diode, Signal, 1N4148.	3198 010 10010	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6910	Diode, Signal, BAT85	9336 247 60133	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6912	Diode, Signal, BAS316.	3198 010 10630	
5307	Coil, 10u.	2422 535 95363		6913	Diode, Signal, BAS316.	3198 010 10630	
5308	Coil, 1u	2422 535 95387		6914	Diode, Signal, BAS316.	3198 010 10630	
5309	Coil, 10u.	2422 535 95363		6915	Diode, Rect, BYV27-600.	9340 418 70133	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6916	Diode, Rect, BYV27-600.	9340 418 70133	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6917	Diode, Rect, BYV27-400.	9340 366 90133	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6919	Diode, Signal, BAT254.	9340 393 00115	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7300	Transistor, NPN, BC547B.	3198 020 40030	
5314	Coil, 10u.	2422 535 95363		7301	Transistor, FET, STW13NB60	9322 121 46687	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7302	IC, MC44603AP.	9322 108 36682	
5316	Coil, 10u.	2422 535 95363		7303	Optic Coupler, CQY80NG	9338 941 50682	
5317	Coil, 10u.	2422 535 95363		7304	IC, TL431BCLP.	9322 115 98676	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7305	IC, TL431BCLP.	9322 115 98676	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7309	Transistor, NPN, BC547B.	3198 020 40030	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7801	Transistor, NPN, BU2520AF.	9340 153 80127	
5321	Coil, 1u	2422 535 95387		7802	Transistor, FET, 2SK2232	9322 135 90687	
5322	Coil, 10u.	2422 535 95363		7803	IC, LM393D	9339 849 10668	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7807	F.E.T. Signal, BSN304.	9340 235 30126	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7808	Transistor, NPN, BC847B.	3198 010 42030	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041		7809	Transistor, NPN, BC847B.	3198 010 42030	
5336	Coil, 10u.	2422 535 95363		7810	Transistor, NPN, BC847B.	3198 010 42030	
5801	Transformer, US40104-01.	2422 531 02512		7811	IC, TDA8177.	9322 066 43687	
5802	Coil, 47u.	2422 535 95282		7812	Transistor, PNP, BF423	9332 593 60126	
5803	Coil, 2u2.	2422 535 91014		7813	Transistor, NPN, BC847B.	3198 010 42030	
5804	Coil, 5u1.	2422 549 45206		7814	Transistor, PNP, BC857B.	3198 010 42150	
5805	Coil, 90u.	2422 536 00272		7901	Transistor, NPN, BF487	9337 626 60112	
5807	Coil, 1m5.	2422 535 95723		7902	Transistor, NPN, BC847B.	3198 010 42030	
5808	Transformer, Signal Driver, UD151.	2422 531 02515		7903	Transistor, PNP, BC327-25.	3198 020 43430	
5809	Coil, 47u.	3198 018 24790		7904	Transistor, NPN, BC847B.	3198 010 42030	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7905	Transistor, PNP, BC857B.	3198 010 42150	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010		7906	Transistor, NPN, BC847B.	3198 010 42030	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434		9000	Wire Jumper, 0.58MM.	3198 036 90010	
5902	Coil, 47u.	2422 535 95282		9106	Wire Jumper, 0.58MM.	3198 036 90010	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		9109	Wire Jumper, 0.58MM.	3198 036 90010	
5904	High Voltage Generator, PTV.	3122 268 32865		9110	Wire Jumper, 0.58MM.	3198 036 90010	
6301	Diode, Rect, BYV95C	9335 001 80133		9138	Wire Jumper, 0.58MM.	3198 036 90010	
6302	Diode, Rect, 1N5062	9330 764 50133		9139	Wire Jumper, 0.58MM.	3198 036 90010	
6303	Diode, Rect, 1N5062	9330 764 50133		9140	Wire Jumper, 0.58MM.	3198 036 90010	
6304	Diode, Rect, BY229X-600	9340 380 20127		9141	Wire Jumper, 0.58MM.	3198 036 90010	
6306	Diode, Rect, BY229X-600	9340 380 20127		9142	Wire Jumper, 0.58MM.	3198 036 90010	
6307	Diode, Rect, BY229X-600	9340 380 20127		9143	Wire Jumper, 0.58MM.	3198 036 90010	
6308	Diode, Rect, BY229X-600	9340 380 20127		9146	Wire Jumper, 0.58MM.	3198 036 90010	
6309	Diode, Rect, BY229X-600	9340 380 20127		9149	Wire Jumper, 0.58MM.	3198 036 90010	
6310	Diode, Rect, BYD33D	9337 234 00133		9153	Wire Jumper, 0.58MM.	3198 036 90010	
6313	Diode, Signal, 1N4148.	9330 839 90133		9156	Wire Jumper, 0.58MM.	3198 036 90010	
6314	Diode, Rect, BY229X-600	9340 380 20127		9158	Wire Jumper, 0.58MM.	3198 036 90010	
6316	Diode, Rect, BY229X-600	9340 380 20127		9161	Wire Jumper, 0.58MM.	3198 036 90010	
6317	Diode, Rect, BY229X-600	9340 380 20127		9162	Wire Jumper, 0.58MM.	3198 036 90010	
6318	Diode, Rect, BYV95C	9335 001 80133		9165	Wire Jumper, 0.58MM.	3198 036 90010	
6320	Diode, Signal, 1N4148.	9330 839 90133		9166	Wire Jumper, 0.58MM.	3198 036 90010	
6321	Diode, Signal, 1N4148.	9330 839 90133		9167	Wire Jumper, 0.58MM.	3198 036 90010	
6801	Diode, Rect, BY229X-200	9340 380 00127		9168	Wire Jumper, 0.58MM.	3198 036 90010	
6802	Diode, Rect, BYV95C	9335 001 80133		9169	Wire Jumper, 0.58MM.	3198 036 90010	
6803	Diode, Rect, BY229X-200	9340 380 00127		9170	Wire Jumper, 0.58MM.	3198 036 90010	
6804	Zener Diode, 4.7 volt.	3198 010 24780		9171	Wire Jumper, 0.58MM.	3198 036 90010	
6805	Diode, Rect, BYV27-200.	9335 526 80133		9172	Wire Jumper, 0.58MM.	3198 036 90010	
6806	Diode, Rect, BYV27-200.	9335 526 80133		9173	Wire Jumper, 0.58MM.	3198 036 90010	
6807	Diode, Signal, BAS316.	3198 010 10630		9176	Wire Jumper, 0.58MM.	3198 036 90010	
6808	Diode, Signal, BAS316.	3198 010 10630		9177	Wire Jumper, 0.58MM.	3198 036 90010	
6809	Diode, Rect, BYD33J	9337 234 20133		9178	Wire Jumper, 0.58MM.	3198 036 90010	
6810	Diode, Rect, BYM357DX	9340 560 29127		9179	Wire Jumper, 0.58MM.	3198 036 90010	
6811	Diode, Rect, BYV27-200.	9335 526 80133		9180	Wire Jumper, 0.58MM.	3198 036 90010	
6812	Zener Diode, 68 volt	3198 010 26890		9181	Wire Jumper, 0.58MM.	3198 036 90010	
6813	Zener Diode, 10 volt	9340 386 80115		9187	Wire Jumper, 0.58MM.	3198 036 90010	
6814	Zener Diode, 10 volt	9340 386 80115		9188	Wire Jumper, 0.58MM.	3198 036 90010	
6815	Diode, Signal, BAS316.	3198 010 10630		9189	Wire Jumper, 0.58MM.	3198 036 90010	
6816	Zener Diode, 68 volt	3198 010 26890		9190	Wire Jumper, 0.58MM.	3198 036 90010	
6817	Diode, Signal, BAS316.	3198 010 10630		9191	Wire Jumper, 0.58MM.	3198 036 90010	
6818	Diode, Signal, BAS316.	3198 010 10630		9193	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

7710	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9147	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

H.O.P. Panel Parts

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP920284F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Model 43PP9202/84F Cabinet Parts

AC18	Mirror, 2 Surface, 43V HDR	3135 034 90011

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

Rear Switch Panel Parts

Rear Switch Panel Parts

Model 43PP9202/84F Cabinet Parts

		Model 43PP9202/84F Cabinet Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Cover, Back.	3135 034 00313
	AC03	Keyboard Assembly.	3135 037 10551
	AC04	Back, Lower, 43.	3135 034 00652
	AC07	Barrier, Rear, 43V	3135 013 03732
	AC09	Assembly, Front, Cabinet	3135 037 51851
	AC13	Lens, IR Receiver.	3135 034 00861
	AC14	Lens, Fresnel, 43V	3135 033 20171
	AC15	Screen, Lenticular, 43V.	3135 033 20141
	AC16	Screen, Protector, 43V.	3135 034 00521
	AC18	Mirror, 2 Surface, 43V HDR	3135 034 90011
	AC22	Bracket, Side Jack Panel	3135 037 50681
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror, Mounting.	3135 011 04612
	AC28	Retainer, Screen, Horiz 43V.	3135 034 01931
	AC29	Retainer, Screen Vertical 43V.	3135 034 01941
	AC30	Assembly, Baffle, 43V.	3135 037 50661
	AC31	Nameplate.	3135 015 02511
	AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00772
	AC34	Owner's Manual (English).	3135 035 20391
	AC34	Owner's Manual (Spanish)	3135 035 21461
	AC35	Quick Use Guide, (English) (Not Shown	3135 035 20401
	AC35	Quick Use Guide (Spanish).	3135 035 21451
	AC38	Cup, Baffle Mounting (3 Used)	3135 013 02761
S	DEFL	Deflection Yoke, BY01716	2422 549 45593
S	FG2	Focus Control, 100M, 15KV.	2422 549 45511
	REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
	X1	Screw, 8-32X0.5 Torx (4 used).	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X12	Bracket, CRT, Spring	3135 011 02371
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT P16LTG00BMB(U), Blue	9322 173 23682
S	X15	CRT P16LTG00RFA(U), Red.	9322 173 22682
	X16	Pad, CRT (Not Shown) (4 Used).	3135 014 02811
	X2	Lens, Delta 240.	3135 037 50701
	X3	Lens, C-Element, Green	3135 034 00731
	X3	Lens, C-Element, Clear	3135 034 00721
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 034 02561
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 034 02551
	X9	Coupler, CRT, Green (Part of CRT Assembly).	3135 011 04282
	X9	Coupler, CRT, Red & Blue (Part of CRT Assembly).	3135 011 04474

Cabinet & Accessory Parts

Cabinet & Accessory Parts

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0382	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	
9195	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

SSM Panel Parts

0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

7007	Transistor, NPN, BC817-25.	3198 010 43230	9133	Wire Jumper, 0.58MM.	3198 036 90010
7016	Transistor, NPN, BC847B.	3198 010 42030	9134	Wire Jumper, 0.58MM.	3198 036 90010
7017	IC, CXA2089S	9322 162 27682	9135	Wire Jumper, 0.58MM.	3198 036 90010
7025	Transistor, NPN, BC847B.	3198 010 42030	9136	Wire Jumper, 0.58MM.	3198 036 90010
7026	Transistor, NPN, BC847B.	3198 010 42030	9137	Wire Jumper, 0.58MM.	3198 036 90010
7044	IC, STK392-120	9322 123 44682	9138	Wire Jumper, 0.58MM.	3198 036 90010
7045	IC, STK392-120	9322 123 44682	9139	Wire Jumper, 0.58MM.	3198 036 90010
7101	IC, L7912CV.	9337 107 20682	9140	Wire Jumper, 0.58MM.	3198 036 90010
7102	IC, L7908CV.	9322 069 79682	9141	Wire Jumper, 0.58MM.	3198 036 90010
7103	IC, L7912CV.	9335 040 20682	9142	Wire Jumper, 0.58MM.	3198 036 90010
7105	IC, L7912CV.	9335 202 90682	9143	Wire Jumper, 0.58MM.	3198 036 90010
7106	IC, LM317T	9337 220 80682	9144	Wire Jumper, 0.58MM.	3198 036 90010
7208	Transistor, NPN, BC847B.	3198 010 42030	9145	Wire Jumper, 0.58MM.	3198 036 90010
7403	IC, TDA1308T/N1.	9350 721 10115	9146	Wire Jumper, 0.58MM.	3198 036 90010
7700	IC, TDA7490.	9322 147 50667	9148	Wire Jumper, 0.58MM.	3198 036 90010
7701	Transistor, NPN, BC847B.	3198 010 42030	9149	Wire Jumper, 0.58MM.	3198 036 90010
7704	Transistor, NPN, BC847B.	3198 010 42030	9150	Wire Jumper, 0.58MM.	3198 036 90010
7705	Transistor, NPN, BC847B.	3198 010 42030	9151	Wire Jumper, 0.58MM.	3198 036 90010
7706	Transistor, PNP, BC857B.	3198 010 42150	9152	Wire Jumper, 0.58MM.	3198 036 90010
7707	Transistor, NPN, BC847B.	3198 010 42030	9153	Wire Jumper, 0.58MM.	3198 036 90010
7708	Transistor, PNP, BC857B.	3198 010 42150	9154	Wire Jumper, 0.58MM.	3198 036 90010
7710	Transistor, NPN, BC847B.	3198 010 42030	9155	Wire Jumper, 0.58MM.	3198 036 90010
7800	Transistor, NPN, BC847B.	3198 010 42030	9156	Wire Jumper, 0.58MM.	3198 036 90010
7801	Transistor, PNP, BC857B.	3198 010 42150	9157	Wire Jumper, 0.58MM.	3198 036 90010
7802	Transistor, NPN, BC847B.	3198 010 42030	9158	Wire Jumper, 0.58MM.	3198 036 90010
7803	Transistor, PNP, BC857B.	3198 010 42150	9159	Wire Jumper, 0.58MM.	3198 036 90010
7804	Transistor, NPN, BC847B.	3198 010 42030	9160	Wire Jumper, 0.58MM.	3198 036 90010
7805	Transistor, PNP, BC857B.	3198 010 42150	9161	Wire Jumper, 0.58MM.	3198 036 90010
7806	Transistor, NPN, BC847B.	3198 010 42030	9162	Wire Jumper, 0.58MM.	3198 036 90010
7808	Transistor, NPN, BC847B.	3198 010 42030	9163	Wire Jumper, 0.58MM.	3198 036 90010
7809	Transistor, PNP, BC857B.	3198 010 42150	9164	Wire Jumper, 0.58MM.	3198 036 90010
7810	Transistor, NPN, BC847B.	3198 010 42030	9165	Wire Jumper, 0.58MM.	3198 036 90010
7811	Transistor, PNP, BC857B.	3198 010 42150	9166	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9177	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9187	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9189	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9202	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9205	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC04	Back, Lower.	3135 033 00131	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC14	Fresnel, Lens, 46W	3135 014 08461	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC30	Baffle, Assembly, 46W.	3135 037 50371	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +/-) . . .	3135 037 10811

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930201 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC04	Back, Lower.	3135 033 00131	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC14	Fresnel, Lens, 46W	3135 014 08461	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC30	Baffle, Assembly, 46W.	3135 037 50371	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

6028	Diode, Signal, BAV99	9332 153 70215		9123	Wire Jumper, 0.58MM.	3198 036 90010	
6029	Diode, Signal, BAV99	9332 153 70215		9124	Wire Jumper, 0.58MM.	3198 036 90010	
6034	Zener Diode, 33 volt	9340 388 00115		9125	Wire Jumper, 0.58MM.	3198 036 90010	
6036	Zener Diode, 4.7 volt.	3198 020 54780		9126	Wire Jumper, 0.58MM.	3198 036 90010	
6052	Diode, Signal, BAS316.	3198 010 10630		9127	Wire Jumper, 0.58MM.	3198 036 90010	
6053	Diode, Signal, BAS316.	3198 010 10630		9128	Wire Jumper, 0.58MM.	3198 036 90010	
6701	Thyristor, BT169B.	9338 268 50126		9129	Wire Jumper, 0.58MM.	3198 036 90010	
6702	Diode, Rect, S1D.	9322 128 69685		9130	Wire Jumper, 0.58MM.	3198 036 90010	
7002	Transistor, NPN, BC847B.	3198 010 42030		9131	Wire Jumper, 0.58MM.	3198 036 90010	
7003	Transistor, NPN, BC847B.	3198 010 42030		9132	Wire Jumper, 0.58MM.	3198 036 90010	
7005	Transistor, NPN, BC817-25.	3198 010 43230		9133	Wire Jumper, 0.58MM.	3198 036 90010	
7007	Transistor, NPN, BC817-25.	3198 010 43230		9134	Wire Jumper, 0.58MM.	3198 036 90010	
7016	Transistor, NPN, BC847B.	3198 010 42030		9135	Wire Jumper, 0.58MM.	3198 036 90010	
7017	IC, CXA2089S	9322 162 27682		9136	Wire Jumper, 0.58MM.	3198 036 90010	
7044	IC, STK392-120	9322 123 44682		9137	Wire Jumper, 0.58MM.	3198 036 90010	
7045	IC, STK392-120	9322 123 44682		9138	Wire Jumper, 0.58MM.	3198 036 90010	
7101	IC, L7912CV.	9337 107 20682		9139	Wire Jumper, 0.58MM.	3198 036 90010	
7102	IC, L7908CV.	9322 069 79682		9140	Wire Jumper, 0.58MM.	3198 036 90010	
7103	IC, L7912CV.	9335 040 20682		9141	Wire Jumper, 0.58MM.	3198 036 90010	
7105	IC, L7912CV.	9335 202 90682		9142	Wire Jumper, 0.58MM.	3198 036 90010	
7106	IC, LM317T	9337 220 80682		9143	Wire Jumper, 0.58MM.	3198 036 90010	
7208	Transistor, NPN, BC847B.	3198 010 42030		9144	Wire Jumper, 0.58MM.	3198 036 90010	
7403	IC, TDA1308T/N1.	9350 721 10115		9145	Wire Jumper, 0.58MM.	3198 036 90010	
7700	IC, TDA7490.	9322 147 50667		9146	Wire Jumper, 0.58MM.	3198 036 90010	
7701	Transistor, NPN, BC847B.	3198 010 42030		9147	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7711	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +/-) . . .	3135 037 10811

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930217F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC03	Customer Control Panel	3135 037 51412	
AC06	Frame, Chassis	3135 034 00606	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror, Lower	3135 034 02451	
AC11	Frame, PIP	3135 014 11101	
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811	
AC13	Lens, IR, Receiver	3135 034 00861	
AC14	Fresnel Lens, 46W, Pre-Lubed	3135 033 20181	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC29	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC30	Baffle, 46W.	3135 037 51641	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC50	Quick Use Guide, 46PP9302 HDTV Monito	3135 035 20751	
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509	
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511	
REMOTE	Transmitter, RC2061/01	3128 147 14611	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler. 50V, 46W (Red & Blue).	3135 011 03635	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6816	Zener Diode, 68 volt	3198 010 26890	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6832	Zener Diode, 15 volt	9340 387 20115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	
9195	Wire Jumper, 0.58MM.	3198 036 90010	
9198	Wire Jumper, 0.58MM.	3198 036 90010	
9302	Wire Jumper, 0.58MM.	3198 036 90010	
9303	Wire Jumper, 0.58MM.	3198 036 90010	
9304	Wire Jumper, 0.58MM.	3198 036 90010	
9307	Wire Jumper, 0.58MM.	3198 036 90010	
9308	Wire Jumper, 0.58MM.	3198 036 90010	
9309	Wire Jumper, 0.58MM.	3198 036 90010	
9804	Wire Jumper, 0.58MM.	3198 036 90010	
9805	Wire Jumper, 0.58MM.	3198 036 90010	
9807	Wire Jumper, 0.58MM.	3198 036 90010	
9808	Wire Jumper, 0.58MM.	3198 036 90010	
9809	Wire Jumper, 0.58MM.	3198 036 90010	
9811	Wire Jumper, 0.58MM.	3198 036 90010	
9813	Wire Jumper, 0.58MM.	3198 036 90010	
9814	Wire Jumper, 0.58MM.	3198 036 90010	
9815	Wire Jumper, 0.58MM.	3198 036 90010	
9816	Wire Jumper, 0.58MM.	3198 036 90010	
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991	

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

0002	Insulator.	3135 033 10011	2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
0003	Clip, Transistor	3135 011 02681	2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0011	Spring, Clip, Horiz.	3135 011 04572	2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
0012	Spring, Clip, Horiz.	3135 011 04572	2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
0045	Heatsink, Folded	3135 011 04555	2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0101	Heatsink, TO-220	3135 011 03291	2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0102	Heatsink, TO-220	3135 011 03291	2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
0103	Heatsink, TO-220	3135 011 03291	2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0105	Heatsink, TO-220	3135 011 03291	2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0106	Heatsink, TO-220	3135 011 03291	2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1000	Connector, 15 Pin.	2422 025 16976	2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1001	Connector, 15 Pin.	2422 025 16976	2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1002	Connector, 1 Pin	2422 015 18552	2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1003	Connector, 1 Pin	2422 015 18552	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1005	Connector, 4 Pin	2422 025 10647	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1006	Connector, 4 Pin	2422 025 10647	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1007	Connector, 4 Pin	2422 025 10647	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1008	Connector, 9 Pin	2422 025 16049	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1009	Connector, 9 Pin	2422 025 16049	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1010	Connector, 1 Pin	2422 015 18552	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1014	Connector, 7 Pin	2422 025 11244	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1020	Connector, SIMM, 80 Pin.	2422 025 17242	2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1021	Socket, Cinch, 2 Pin	2422 026 05293	2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1024	Socket, Cinch, 12 Pin.	2422 026 05064	2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
1025	Socket, MDIN, 10 Pin	2422 026 04926	2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1026	Socket, MDIN, 10 Pin	2422 026 04926	2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1027	Socket, Cinch, 2 Pin	2422 026 05294	2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1028	Connector, 3 Pin	2422 025 09191	2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1030	Connector, 3 Pin	2422 025 11117	2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
1043	Connector, 10 Pin.	2422 025 16587	2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
1102	Connector, 12 Pin.	2422 025 08333	2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
1106	Tuner, V+U, PLL	2422 542 90108	2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1201	Connector, 10 Pin.	2422 025 12484	2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
1222	Connector, 5 Pin	2422 025 12481	2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1250	Connector, 9 Pin	2422 025 16049	2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1272	Connector, 3 Pin	2412 020 00725	2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1302	Connector, 2 Pin	2422 025 09405	2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1303	Connector, 5 Pin	2422 025 10428	2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
1335	Connector, 10 Pin.	2422 025 12484	2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1344	Connector, 3 Pin	2412 020 00725	2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
1349	Connector, 5 Pin	2422 025 15832	2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1410	Cable, 1 Pin, 70mm	3135 031 00531	2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
1411	Cable, 1 Pin, 240mm.	3135 031 00521	2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1412	Cable, 1 Pin, 130mm.	3135 031 00601	2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
1516	Connector, 12 Pin.	2422 025 08333	2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1518	Connector, 12 Pin.	2422 025 08333	2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1610	Connector, 5 Pin	2422 025 12481	2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1681	Connector, 3 Pin	2422 025 10768	2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1702	Thyristor, BT169B.	9338 268 50126	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1950	Connector, 9 Pin	2422 025 16049	2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

7025	Transistor, NPN, BC847B.	3198 010 42030		9136	Wire Jumper, 0.58MM.	3198 036 90010	
7026	Transistor, NPN, BC847B.	3198 010 42030		9137	Wire Jumper, 0.58MM.	3198 036 90010	
7044	IC, STK392-120	9322 123 44682		9138	Wire Jumper, 0.58MM.	3198 036 90010	
7045	IC, STK392-120	9322 123 44682		9139	Wire Jumper, 0.58MM.	3198 036 90010	
7101	IC, L7912CV.	9337 107 20682		9140	Wire Jumper, 0.58MM.	3198 036 90010	
7102	IC, L7908CV.	9322 069 79682		9141	Wire Jumper, 0.58MM.	3198 036 90010	
7103	IC, L7912CV.	9335 040 20682		9142	Wire Jumper, 0.58MM.	3198 036 90010	
7105	IC, L7912CV.	9335 202 90682		9143	Wire Jumper, 0.58MM.	3198 036 90010	
7106	IC, LM317T	9337 220 80682		9144	Wire Jumper, 0.58MM.	3198 036 90010	
7208	Transistor, NPN, BC847B.	3198 010 42030		9145	Wire Jumper, 0.58MM.	3198 036 90010	
7403	IC, TDA1308T/N1.	9350 721 10115		9146	Wire Jumper, 0.58MM.	3198 036 90010	
7700	IC, TDA7490.	9322 147 50667		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7701	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11221

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic W)	3104 328 25631

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930284 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC04	Back, Lower.	3135 033 00131	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC14	Fresnel, Lens, 46W	3135 014 08461	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC30	Baffle, Assembly, 46W.	3135 037 50371	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +/-) . . .	3135 037 10811

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930284F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Model 46PP9302/84F Cabinet Parts

	Model 46PP9302/84F Cabinet Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper, 46W	3135 034 00321
AC04	Backcover, Lower	3135 033 00931
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack Panel	3135 034 02421
AC09	Frame, Screen, 46W	3135 037 50871
AC10	Bracket, Mirror Lower.	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20181
AC15	Lenticular, Screen, 46W.	3135 033 20061
AC16	Protector, Screen, 46W	3135 034 01321
AC17	Barrier, Light	3135 034 00891
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W (2 Used).	2422 264 00455
AC25B	Bracket, Speaker 4X6 (Not Shown)	3135 034 02401
AC26	Bracket, Mirror Support.	3135 011 03005
AC27	Overlay, Rear Jack	3135 030 00081
AC28	Retainer, Screen, Horiz, 50V-46W (2 Used)	3135 034 01221
AC29	Retainer, Screen, Vertical, 46W (2 Used)	3135 034 01271
AC30	Baffle, 46W.	3135 037 51641
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20741
AC34	Owner's Manual, Spanish.	3135 035 21481
AC35	Quick Use Guide.	3135 035 20751
AC35	Quick Use Guide, Spanish	3135 035 21471
AC36	Bracket, Chassis Holdown	3135 011 02011
AC38	Cup, Baffle Mounting	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror Mylar.	3135 031 20071
S DEFL	Yoke, Deflection, BY01715.	2422 549 45509
S FG2	Focuspot, 100M, 15KV HSB222	2422 549 45511
REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
X1	Screw, 8-32X0.5 Torx (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown) (4 Used).	3135 014 02811
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Green	3135 034 00731
X3	Lens, C-Element, Clear	3135 034 00721
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 034 02561
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 034 02551
X9	Coupler, 50V, 46W.	3135 011 03635
X9	Coupler, Green	3135 011 04282

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6816	Zener Diode, 68 volt	3198 010 26890	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6832	Zener Diode, 15 volt	9340 387 20115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	
9195	Wire Jumper, 0.58MM.	3198 036 90010	
9198	Wire Jumper, 0.58MM.	3198 036 90010	
9302	Wire Jumper, 0.58MM.	3198 036 90010	
9303	Wire Jumper, 0.58MM.	3198 036 90010	
9304	Wire Jumper, 0.58MM.	3198 036 90010	
9307	Wire Jumper, 0.58MM.	3198 036 90010	
9308	Wire Jumper, 0.58MM.	3198 036 90010	
9309	Wire Jumper, 0.58MM.	3198 036 90010	
9804	Wire Jumper, 0.58MM.	3198 036 90010	
9805	Wire Jumper, 0.58MM.	3198 036 90010	
9807	Wire Jumper, 0.58MM.	3198 036 90010	
9808	Wire Jumper, 0.58MM.	3198 036 90010	
9809	Wire Jumper, 0.58MM.	3198 036 90010	
9811	Wire Jumper, 0.58MM.	3198 036 90010	
9813	Wire Jumper, 0.58MM.	3198 036 90010	
9814	Wire Jumper, 0.58MM.	3198 036 90010	
9815	Wire Jumper, 0.58MM.	3198 036 90010	
9816	Wire Jumper, 0.58MM.	3198 036 90010	
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991	

SSM Panel Parts

SSM Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

0001	Heatsink	3135 031 60071	2060	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
0002	Insulator	3135 033 10011	2061	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
0003	Clip, Transistor	3135 011 02681	2062	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0011	Spring, Clip, Horiz	3135 011 04572	2063	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0012	Spring, Clip, Horiz	3135 011 04572	2066	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0045	Heatsink, Folded	3135 011 04555	2067	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0101	Heatsink, TO-220	3135 011 03291	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0102	Heatsink, TO-220	3135 011 03291	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0103	Heatsink, TO-220	3135 011 03291	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0105	Heatsink, TO-220	3135 011 03291	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0106	Heatsink, TO-220	3135 011 03291	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1000	Connector, 15 Pin	2422 025 16976	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1001	Connector, 15 Pin	2422 025 16976	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1002	Connector, 1 Pin	2422 015 18552	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1003	Connector, 1 Pin	2422 015 18552	2076	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1005	Connector, 4 Pin	2422 025 10647	2077	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1006	Connector, 4 Pin	2422 025 10647	2078	Cap, 100u, 20%, 25V, Electrolytic	3198 025 31010
1007	Connector, 4 Pin	2422 025 10647	2079	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1010	Connector, 1 Pin	2422 015 18552	2081	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1014	Connector, 7 Pin	2422 025 11244	2083	Cap, 220u, 20%, 16V, Electrolytic	3198 025 22210
1020	Connector, SIMM, 80 Pin	2422 025 17242	2084	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
1021	Socket, Cinch, 2 Pin	2422 026 05293	2085	Cap, 47n, +80/-20%, 50V, Ceramic	3198 017 24730
1024	Socket, Cinch, 12 Pin	2422 026 05064	2086	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1025	Socket, MDIN, 10 Pin	2422 026 04926	2087	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1026	Socket, MDIN, 10 Pin	2422 026 04926	2088	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
1028	Connector, 3 Pin	2422 025 09191	2089	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1030	Connector, 3 Pin	2422 025 11117	2090	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1043	Connector, 10 Pin	2422 025 16587	2091	Cap, 470n, +80/-20%, 16V, Ceramic	3198 017 24740
1102	Connector, 12 Pin	2422 025 08333	2092	Cap, 470n, +80/-20%, 16V, Ceramic	3198 017 24740
1106	Tuner, V+U, PLL	2422 542 90108	2093	Cap, 470n, 10%, 50V, Polyester	3198 014 04740
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2094	Cap, 470n, +80/-20%, 16V, Ceramic	3198 017 24740
1201	Connector, 10 Pin	2422 025 12484	2095	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290
1222	Connector, 5 Pin	2422 025 12481	2096	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1250	Connector, 9 Pin	2422 025 16049	2097	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
1272	Connector, 3 Pin	2412 020 00725	2098	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1302	Connector, 2 Pin	2422 025 09405	2099	Cap, 2u2, +80/-20%, 10V, Ceramic	3198 017 22250
1335	Connector, 10 Pin	2422 025 12484	2102	Cap, 100n, +80/-20%, 50V, Ceramic	2020 552 95499
1344	Connector, 3 Pin	2412 020 00725	2103	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1349	Connector, 5 Pin	2422 025 15832	2104	Cap, 100n, +80/-20%, 50V, Ceramic	2020 552 95499
1412	Cable, 1 Pin, 130mm	3135 031 00601	2105	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1516	Connector, 12 Pin	2422 025 08333	2106	Cap, 1u, 20%, 50V, Electrolytic	3198 028 51080
1518	Connector, 12 Pin	2422 025 08333	2107	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1610	Connector, 5 Pin	2422 025 12481	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1681	Connector, 3 Pin	2422 025 10768	2109	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC	2422 086 10783	2110	Cap, 47u, 20%, 16V, Electrolytic	3198 028 24790
S 1701	Fuse, 2 A, 250V IEC	2422 086 10783	2111	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1702	Thyristor, BT169B	9338 268 50126	2113	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1950	Connector, 9 Pin	2422 025 16049	2115	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic	3198 025 71090	2130	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2001	Cap, 100n, +80/-20%, 50V, Ceramic	2020 552 95499	2131	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2002	Cap, 10u, 20%, 100V, Electrolytic	3198 025 71090	2132	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2003	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2133	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2004	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2134	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2140	Cap, 100u, 20%, 25V, Electrolytic	3198 025 31010
2006	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2141	Cap, 100u, 20%, 25V, Electrolytic	3198 025 31010
2007	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2150	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2156	Cap, 1n, 5%, 50V, Ceramic	2020 552 93477
2010	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic	2020 552 95343
2011	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2012	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2013	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010
2016	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic	3198 017 06820
2017	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic	3198 017 06820
2018	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010
2019	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2020	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2021	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic	2020 552 95343
2022	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2701	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2702	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2025	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050	2703	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2704	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2705	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2029	Cap, 47n, +80/-20%, 50V, Ceramic	3198 017 24730	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2030	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic	3198 023 22240
2031	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010	2709	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2032	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2710	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2033	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2034	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2712	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814
2036	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2037	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2714	Cap, 33n, 10%, 50V, Ceramic	3198 017 03330
2039	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2041	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2716	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
2042	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2043	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2719	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2046	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2720	Cap, 220n, +80/-20%, 25V, Ceramic	3198 023 22240
2049	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2721	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2055	Cap, 1n, 5%, 50V, Ceramic	2020 552 93477	2722	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2056	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2723	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814
2057	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2724	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814
2059	Cap, 470u, 20%, 50V, Electrolytic	3198 026 54710	2725	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic W)	3104 328 25631

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095

S = Safety Part Be sure to use exact replacement part.

1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290

46PP930284F (continued)

2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP9302H17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Back, Upper, 46W.	3135 034 00321
	AC03	Customer Control Panel	3135 037 51412
	AC06	Frame, Chassis	3135 034 00606
	AC07	Barrier, Rear, 46W	3135 033 00251
	AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
	AC09	Frame, Screen, 46W	3135 037 50871
	AC10	Bracket, Mirror, Lower	3135 034 02451
	AC11	Frame, PIP	3135 014 11101
	AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
	AC13	Lens, IR, Receiver	3135 034 00861
	AC14	Fresnel Lens, 46W, Pre-Lubed	3135 033 20181
	AC15	Lenticular, Screen, 46W.	3135 033 20061
	AC16	Protector, Screen, 46W	3135 034 01321
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181
	AC21	Bracket, Module.	3135 034 00361
	AC22	Frame, Side Jack Panel	3135 037 50632
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror, Support	3135 011 03005
	AC27	Overlay, Rear Jack	3135 030 00081
	AC28	Retainer, Screen, Vertical, 46W	3135 034 01271
	AC29	Retainer, Screen, Horiz, 50V-46W	3135 034 01221
	AC30	Baffle, 46W.	3135 037 51641
	AC31	Wordmark, Philips, Dark Silver	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741
	AC38	Baffle Mounting Cup.	3135 013 02761
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mylar Mirror, 46W	3135 031 20071
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, 46PP9302 HDTV Monito	3135 035 20751
S	DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X12	Bracket, CRT, Spring	3135 011 02371
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta 250.	3135 037 50711
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler. 50V, 46W (Red & Blue).	3135 011 03635
	X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

0002	Insulator.	3135 033 10011	2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
0003	Clip, Transistor	3135 011 02681	2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0011	Spring, Clip, Horiz.	3135 011 04572	2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
0012	Spring, Clip, Horiz.	3135 011 04572	2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
0045	Heatsink, Folded	3135 011 04555	2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0101	Heatsink, TO-220	3135 011 03291	2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0102	Heatsink, TO-220	3135 011 03291	2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
0103	Heatsink, TO-220	3135 011 03291	2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0105	Heatsink, TO-220	3135 011 03291	2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0106	Heatsink, TO-220	3135 011 03291	2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1000	Connector, 15 Pin.	2422 025 16976	2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1001	Connector, 15 Pin.	2422 025 16976	2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1002	Connector, 1 Pin	2422 015 18552	2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1003	Connector, 1 Pin	2422 015 18552	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1005	Connector, 4 Pin	2422 025 10647	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1006	Connector, 4 Pin	2422 025 10647	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1007	Connector, 4 Pin	2422 025 10647	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1008	Connector, 9 Pin	2422 025 16049	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1009	Connector, 9 Pin	2422 025 16049	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1010	Connector, 1 Pin	2422 015 18552	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1014	Connector, 7 Pin	2422 025 11244	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1020	Connector, SIMM, 80 Pin.	2422 025 17242	2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1021	Socket, Cinch, 2 Pin	2422 026 05293	2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1024	Socket, Cinch, 12 Pin.	2422 026 05064	2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
1025	Socket, MDIN, 10 Pin	2422 026 04926	2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1026	Socket, MDIN, 10 Pin	2422 026 04926	2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1027	Socket, Cinch, 2 Pin	2422 026 05294	2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1028	Connector, 3 Pin	2422 025 09191	2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1030	Connector, 3 Pin	2422 025 11117	2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
1043	Connector, 10 Pin.	2422 025 16587	2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
1102	Connector, 12 Pin.	2422 025 08333	2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
1106	Tuner, V+U, PLL	2422 542 90108	2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1201	Connector, 10 Pin.	2422 025 12484	2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
1222	Connector, 5 Pin	2422 025 12481	2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1250	Connector, 9 Pin	2422 025 16049	2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1272	Connector, 3 Pin	2412 020 00725	2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1302	Connector, 2 Pin	2422 025 09405	2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1303	Connector, 5 Pin	2422 025 10428	2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
1335	Connector, 10 Pin.	2422 025 12484	2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1344	Connector, 3 Pin	2412 020 00725	2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
1349	Connector, 5 Pin	2422 025 15832	2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1410	Cable, 1 Pin, 70mm	3135 031 00531	2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
1411	Cable, 1 Pin, 240mm.	3135 031 00521	2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1412	Cable, 1 Pin, 130mm.	3135 031 00601	2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
1516	Connector, 12 Pin.	2422 025 08333	2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1518	Connector, 12 Pin.	2422 025 08333	2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1610	Connector, 5 Pin	2422 025 12481	2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1681	Connector, 3 Pin	2422 025 10768	2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1702	Thyristor, BT169B.	9338 268 50126	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1950	Connector, 9 Pin	2422 025 16049	2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

7025	Transistor, NPN, BC847B.	3198 010 42030		9136	Wire Jumper, 0.58MM.	3198 036 90010	
7026	Transistor, NPN, BC847B.	3198 010 42030		9137	Wire Jumper, 0.58MM.	3198 036 90010	
7044	IC, STK392-120	9322 123 44682		9138	Wire Jumper, 0.58MM.	3198 036 90010	
7045	IC, STK392-120	9322 123 44682		9139	Wire Jumper, 0.58MM.	3198 036 90010	
7101	IC, L7912CV.	9337 107 20682		9140	Wire Jumper, 0.58MM.	3198 036 90010	
7102	IC, L7908CV.	9322 069 79682		9141	Wire Jumper, 0.58MM.	3198 036 90010	
7103	IC, L7912CV.	9335 040 20682		9142	Wire Jumper, 0.58MM.	3198 036 90010	
7105	IC, L7912CV.	9335 202 90682		9143	Wire Jumper, 0.58MM.	3198 036 90010	
7106	IC, LM317T	9337 220 80682		9144	Wire Jumper, 0.58MM.	3198 036 90010	
7208	Transistor, NPN, BC847B.	3198 010 42030		9145	Wire Jumper, 0.58MM.	3198 036 90010	
7403	IC, TDA1308T/N1.	9350 721 10115		9146	Wire Jumper, 0.58MM.	3198 036 90010	
7700	IC, TDA7490.	9322 147 50667		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7701	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11221

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic W)	3104 328 25631

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2502 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2505 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2506 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2507 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2509 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2510 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2511 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2519 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2520 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2521 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2529 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2601 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2602 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2607 Cap, 47n, 10%, 25V, Ceramic. 3198 023 04730
2615 Cap, 100n, 5%, 16V, Polypropylene. . 2020 319 90005
2616 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2617 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2618 Cap, 2u2, +80/-20%, 10V, Ceramic . . 3198 017 22250
2619 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2620 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2621 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2626 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2627 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2628 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2630 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2631 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2632 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2633 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2634 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2635 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2636 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2637 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2638 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2639 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2644 Cap, 100p, 5%, 50V, Ceramic. 3198 016 01010
2700 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2701 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2702 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2704 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2710 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2711 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2714 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2720 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2721 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2724 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2731 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2740 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2741 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2750 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2800 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2802 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2804 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2806 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2807 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2809 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2810 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2811 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2812 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2813 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2814 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2815 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2816 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2901 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2902 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2903 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2904 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2905 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2906 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2909 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2910 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2911 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2912 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2913 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2922 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2923 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2924 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2931 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2933 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2944 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2945 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2951 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2952 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2953 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2957 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2958 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2961 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2963 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2968 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
3150 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3151 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3160 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3161 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3170 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3171 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3180 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3181 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3185 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3186 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3247 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3248 Res, 470K, 5%, 1/10W, Metalized Glass 3198 021 54740
3251 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3261 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3271 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3281 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3286 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3320 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3321 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3323 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3324 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3325 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3326 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3331 Res, 1M, 5%, 1/10W, Metalized Glass. 3198 021 51050
3332 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3333 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3335 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3336 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3339 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3410 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3411 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3412 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3413 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3414 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3415 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3416 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3418 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3419 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3420 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3421 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3422 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3424 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3425 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710
3426 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3427 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3428 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3429 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3430 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3431 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3432 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3433 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3434 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3435 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3436 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3438 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3439 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3441 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3442 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3443 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3444 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3445 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710
3446 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3447 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/01 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC04	Back, Lower.	3135 033 00121	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Screen, Fresnel 50	3135 014 07781	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vert, 50	3135 034 01251	
AC30	Baffle, Assembly, 50	3135 037 50351	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151.	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668

CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC04	Back, Lower.	3135 033 00121	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Screen, Fresnel 50	3135 014 07781	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vert, 50	3135 034 01251	
AC30	Baffle, Assembly, 50	3135 037 50351	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151.	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668

CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/84 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC04	Back, Lower.	3135 033 00121	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Screen, Fresnel 50	3135 014 07781	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vert, 50	3135 034 01251	
AC30	Baffle, Assembly, 50	3135 037 50351	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668

CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/84F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

Model 50PP9202/84F Cabinet Parts

		Model 50PP9202/84F Cabinet Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Backcover, Upper	3135 034 00161
	AC04	Backcover, Lower	3135 033 00721
	AC06	Frame, Chassis	3135 034 00606
	AC07	Barrier, Rear.	3135 033 00141
	AC08	Frame, Rear Jack Panel	3135 034 02421
	AC09	Frame Assembly	3135 017 07261
	AC10	Bracket, Mirror, Lower	3135 034 02451
	AC11	Frame, PIP	3135 014 11101
	AC14	Lens, Fresnel.	3135 033 20191
	AC15	Screen, Lenticular	3135 033 20071
	AC16	Screen, Protector.	3135 034 01301
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror, Assembly, 50V Mylar.	3135 037 51161
	AC21	Bracket, Module.	3135 034 00361
	AC22	Frame, Side Jack Panel	3135 037 50632
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror Support.	3135 011 03005
	AC27	Overlay, Rear Jack Panel	3135 030 00032
	AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221
	AC29	Retainer, Screen Vertical 50V.	3135 034 01251
	AC30	Baffle, Assembly	3135 037 51691
	AC31	Nameplate.	3135 015 02511
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	Owner's Manual	3135 035 20391
	AC34	Owner's Manual, Spanish.	3135 035 21461
	AC35	Quick Use Guide.	3135 035 20401
	AC35	Quick Use Guide, Spanish	3135 035 21451
	AC36	Bracket, Chassis Hold Down	3135 011 02011
	AC38	Cup, Baffle Mounting	3135 013 02761
	AC39	Caster	3135 030 40031
	DEFL	Yoke, Deflection, BY01715.	2422 549 45509
	FG2	Focuspot, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
	X1	Screw, 8-32X0.5, Torx (4 Used)	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (4 Used).	3135 014 02811
	X2	Lens, Delta 250.	3135 037 50711
	X3	Lens, C-Element, Green	3135 034 00731
	X3	Lens, C-Element, Clear	3135 034 00721
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 034 02561
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug Vent.	3135 034 02551
	X9	Coupler, 50V, 46W.	3135 011 03635
	X9	Coupler, Green	3135 011 04282

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0382	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668

S = Safety Part Be sure to use exact replacement part.

7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

50PP920217F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC03	Control Housing.	3135 037 50592	
AC04	Back, Lower.	3135 033 00122	
AC06	Frame, Chassis	3135 034 00606	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror, Lower	3135 034 02451	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR, Receiver	3135 034 00861	
AC14	Lens Fresnel, 50 Pre-Lubed	3135 033 20191	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Vert, 50	3135 034 01251	
AC29	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC30	Baffle, 50	3135 037 51691	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mirror Upper.	3135 031 20021	
AC40A	Bracket, Mirror, Lower	3135 031 20011	
AC41	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC50	Quick Use Guide, HDTV Monitor.	3135 035 20401	
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509	
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511	
REMOTE	Transmitter, RC2061/01	3128 147 14611	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler. 50V, 46W (Red & Blue).	3135 011 03635	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC-Spring, Clip for 6810	3135 011 01512	
0180	Heatsink .	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0381	IC, Spring	3135 011 02331	
0382	IC, Spring	3135 011 02331	
0383	Insulator.	3135 030 50051	
1000	Heatsink, TO-220	3135 011 03291	
1202	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 1 Pin, 5V, 5A	2422 132 07411	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

CRT Panel Parts

S = Safety Part Be sure to use exact replacement part.

0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701

50PP920217F (continued)

3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

51MP392H/17 - Manual no. 7621

Rear Switch Panel Parts

Rear Switch Panel Parts

Input Board Parts

Input Board Parts

CBA	Input Board.	3135 037 10591
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0231	Heatsink, TO-220	3135 011 03291
0320	Barcode Label 32 mm x 6 mm	3121 233 43911
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2006	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2206	Cap, 220u, 20%, 25v, Electrolytic. .	2020 012 92641
2206	Cap, 220u, 20%, 25v, Electrolytic. .	2020 012 93065
2208	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2215	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471
2216	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471
2217	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471
2218	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558 90519
2226	Cap, 22n, +80/-20%, 50v, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50v, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2283	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2287	Cap, 470n, 20%, 50v, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50v, Ceramic . .	3198 019 21030
2290	Cap, 1u, 20%, 50v, Electrolytic. . .	2020 012 92647
2290	Cap, 1u, 20%, 50v, Electrolytic. . .	2020 012 93122
2292	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50v, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558 90519
2296	Cap, 10u, 20%, 50v, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6207	Diode, Rect, BYV95A	9335 000 90133
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
7214	Transistor, NPN, BC547B.	3198 020 40030
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
S 1000	Fuse, Clip, 5A, 250V, IEC.	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275v, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, 50v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, 50v, Ceramic.	2020 554 90173
2005	Cap, 220n, 20%, 275v, Metalized Polyp ropylene	2222 336 29146
S 2011	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200v, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2213	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91374
2213	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91551
2219	Cap, 470u, 20%, 200v, Electrolytic .	2020 021 91321
2270	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91374
2270	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91551
2284	Cap, 1000u, 20%, 35v, Electrolytic .	2020 021 91411
2284	Cap, 1000u, 20%, 35v, Electrolytic .	2020 021 91636
2285	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91374
2285	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91551
2286	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93401
2286	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93458
2289	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93401
2289	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93458
2291	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93401
2291	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93458
S 2295	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	VDR, DC, 1MA/495V, MAX 850VB. . . .	2322 595 90021
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
5000	Filter, Mains, 8mH, 7A, JLB2806. . .	2422 549 44591
5201	Filter, Mains, 100uH, 2A2, W8051 . .	2422 549 44101
5202	Transformer, US28103-00 B.	2422 531 02496
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6231	Diode, Rect, PBYR10100X	9340 555 24127
7213	Optic Coupler, CQY80NG	9338 941 50682
7215	FET POW IRF9Z24N (INR0) L . . .	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687

Kimball Optical Assembly Parts

Kimball Optical Assembly Parts

CBA	Kimball Optical Assembly	3121 237 55181
0040	Rail 50" TO 55" (2 used)	3135 011 03641
0041	Support Rail Common (2 used)	3135 011 02171
0091	Bracket, Focus Control (Not Shown) .	3135 034 00772
0102	Bracket, CRT, Spring	3135 011 02371
0105	Cap Coupler (3 used)	3135 034 02561
0106	Spring, Compression (4 Used)	3135 011 00611
0142	RTV #133	3135 010 02031
0144	Diaphram, Coupler.	3135 013 01061
0146	Plug Vent (3 used)	3135 034 02551
0147	Seal, Vent Plug.	3135 013 01231
0149	Seal, CRT.	3135 013 02321
0150	Seal, Lens	3135 013 02632
0151	Pad, CRT (Not Shown) (4 Used). . . .	3135 014 02811
1183	Focuspot 100M 15KV HSB226 B . . .	2422 549 45941

Magnavox Optical Assembly Parts

Magnavox Optical Assembly Parts

CBA	Magnavox Optical Assembly.	3135 037 74251
0920	Optical Assembly	3121 237 55171
0093	Coupler 54V 50W (Red & Blue)	3135 011 01936
0094	Coupler Green.	3135 011 04283
0096	C Element Green CR	3135 034 04401
0097	C Element Clear CR (Red & Blue). . .	3135 034 04411
0099	Lens Delta 78 (3 used)	3135 013 00822
0148	Crossover Assembly	3135 010 02041

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

1097	CRT P16LXL00RFA(U) (HITJ) B . . .	9322 194 69682
1098	CRT P16LXL00HHA(U) (HITJ) B . . .	9322 194 70682
1099	CRT P16LXL00BMB(U) (HITJ) B . . .	9322 194 71682
1117	CRT Panel, (All)	3135 037 10081
1121	CRT Panel, (All)	3135 037 10081
1123	CRT Panel, (All)	3135 037 10081
5201	Yoke, Green DAV4360M.	2422 549 45208
5202	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
5203	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
0921	Kimball Optical Assembly	3121 237 55181
0040	RAIL 50" TO 55" (2 used)	3135 011 03641
0041	Support Rail Common (2 used)	3135 011 02171
0091	Bracket, Focus Control (Not Shown) .	3135 034 00772
0102	Bracket, CRT, Spring	3135 011 02371
0105	Cap Coupler (3 used)	3135 034 02561
0106	Spring, Compression (4 Used)	3135 011 00611
0142	RTV #133	3135 010 02031
0144	Diaphram, Coupler.	3135 013 01061
0146	Vent Plug (3 used)	3135 034 02551
0147	Seal, Vent Plug.	3135 013 01231
0149	Seal, CRT.	3135 013 02321
0150	Seal, Lens	3135 013 02632
0151	Pad, CRT (Not Shown) (4 Used). . . .	3135 014 02811
1183	Focuspot 100M 15KV HSB226 B . . .	2422 549 45941

Philips Optical Assembly Parts

	Philips Optical Assembly Parts	
CBA	Philips Optical Assembly	3121 237 55171
0093	Coupler 54V 50W (2 used)	3135 011 01936
0094	Coupler Green.	3135 011 04283
0096	C Element Green CR	3135 034 04401
0097	C Element Clear CR (2 used).	3135 034 04411
0099	Lens Delta 78 (3 used)	3135 013 00822
0148	Crossover Assembly	3135 010 02041
1097	CRT, P16LXL00RFA(U) (HITJ) B. . .	9322 194 69682
1098	CRT, P16LXL00HHA(U) (HITJ) B. . .	9322 194 70682
1099	CRT, P16LXL00BMB(U) (HITJ) B. . .	9322 194 71682
1117	CRT Panel, (All)	3135 037 10081
1121	CRT Panel, (All)	3135 037 10081
1123	CRT Panel, (All)	3135 037 10081
5201	Yoke, Green DAV4360M.	2422 549 45208
5202	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
5203	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC03	Keyboard Assembly.	3135 037 10551
AC03	Customer Control Housing	3135 037 54322
AC04	Back Cover, Lower.	3135 033 01261
AC05	Cabinet Assembly, Magnavox	3135 037 54151
AC06	Frame, Chassis	3135 034 00606
AC09	Frame, Screen.	3135 037 54331
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Fresnel Lens 51"	3135 033 20701
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC17	Light Barrier (UL)	3135 033 01271
AC18	2nd Surface Mirror	3135 034 90171
AC22	Side Jack Panel Assembly	3135 037 54161
AC25	Speaker, 8R, 15W	2422 264 00455
AC28	Screen Retainer, Horizontal.	3135 034 04461
AC29	Screen Retainer, Vertical (2). . . .	3135 034 04451
AC31	Magnavox Nameplate	3141 050 00451
AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
AC34	Owner's Manual	3135 035 22982
AC35	Quick Use Guide.	3135 035 22992
CBA	Philips Optical Assembly	3121 237 55171
CBA	CRT Panel.	3135 037 10081
CBA	Button Assembly Housing.	3135 037 54311
CBA	Magnavox Optical Assembly.	3135 037 74251
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
FG2	Focuspot, 100M, 15KV HSB226	2422 549 45941
REMOTE	Remote Transmitter (RC1112709/00). .	3139 238 07301
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
X2	Delta Lens (3)	3135 013 00822
X3	Lens C Element Green	3135 034 04401
X3	Lens C Element Clear (2)	3135 034 04411
X4	Seal, Lens	3135 013 02632
X5	Cap Coupler (3).	3135 034 02561
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Vent Plug (3).	3135 034 02551
X9	Coupler, Red or Blue	3135 011 01936
X9	Coupler, Green	3135 011 04283

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0382	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
S 1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic. . . .	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2816	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2222 479 90022
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, SMT Layer, US54304-00 B	2422 531 00024
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 2u2.	2422 535 91014
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYV95A	9335 000 90133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS216.	9340 255 30115
6808	Diode, Signal, BAS216.	9340 255 30115
6809	Diode, Rect, BYV95C	9335 001 80113
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS216.	9340 255 30115
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS216.	9340 255 30115
6818	Diode, Signal, BAS216.	9340 255 30115
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS216.	9340 255 30115
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS216.	9340 255 30115
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS216.	9340 255 30115
6830	Diode, Signal, BAS216.	9340 255 30115
6831	Diode, Signal, BAS216.	9340 255 30115
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS216.	9340 255 30115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS216.	9340 255 30115
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS216.	9340 255 30115
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS216.	9340 255 30115
6913	Diode, Signal, BAS216.	9340 255 30115
6914	Diode, Signal, BAS216.	9340 255 30115
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel.	3135 037 12571

SSM Panel Parts

	SSM Panel Parts	
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0110	Heatsink	3135 031 60071
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 16v, Electrolytic . .	2020 021 91763
2731	Cap, 2u2, 20%, 16v, Electrolytic . .	2020 021 91763
2732	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2733	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2735	Cap, 10u, 20%, 50v, Electrolytic . .	3198 029 51090
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
2814	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3797	Res, 180K, 5%, 1/10W, Metalized Glass	2120 108 91721
3798	Wire Jumper, 0.58MM.	3198 036 90010
3799	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 330 ohm, 5%, 1/3W, Metal Film .	2322 205 33331
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4015	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4016	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4018	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4019	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Wire Jumper, 0.58MM.	3198 036 90010
5710	Wire Jumper, 0.58MM.	3198 036 90010
5711	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5712	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYV95A	9335 000 90133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Zener Diode, 5.1 volt.	9340 386 10115
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

7007	Transistor, NPN, BC817-25.	3198 010 43230	9136	Wire Jumper, 0.58MM.	3198 036 90010
7016	Transistor, NPN, BC847B.	3198 010 42030	9137	Wire Jumper, 0.58MM.	3198 036 90010
7017	IC, CXA2089S	9322 162 27682	9138	Wire Jumper, 0.58MM.	3198 036 90010
7044	IC, STK392-120	9322 123 44682	9139	Wire Jumper, 0.58MM.	3198 036 90010
7045	IC, STK392-120	9322 123 44682	9140	Wire Jumper, 0.58MM.	3198 036 90010
7101	IC, L7912CV.	9337 107 20682	9141	Wire Jumper, 0.58MM.	3198 036 90010
7102	IC, L7908CV.	9322 069 79682	9142	Wire Jumper, 0.58MM.	3198 036 90010
7103	IC, L7912CV.	9335 040 20682	9143	Wire Jumper, 0.58MM.	3198 036 90010
7105	IC, L7912CV.	9335 202 90682	9144	Wire Jumper, 0.58MM.	3198 036 90010
7106	IC, LM317T	9337 220 80682	9145	Wire Jumper, 0.58MM.	3198 036 90010
7208	Transistor, NPN, BC847B.	3198 010 42030	9146	Wire Jumper, 0.58MM.	3198 036 90010
7700	IC, TDA7490L	9322 163 86682	9148	Wire Jumper, 0.58MM.	3198 036 90010
7701	Transistor, NPN, BC847B.	3198 010 42030	9149	Wire Jumper, 0.58MM.	3198 036 90010
7704	Transistor, NPN, BC847B.	3198 010 42030	9150	Wire Jumper, 0.58MM.	3198 036 90010
7705	Transistor, NPN, BC847B.	3198 010 42030	9151	Wire Jumper, 0.58MM.	3198 036 90010
7706	Transistor, PNP, BC857B.	3198 010 42150	9152	Wire Jumper, 0.58MM.	3198 036 90010
7707	Transistor, NPN, BC847B.	3198 010 42030	9153	Wire Jumper, 0.58MM.	3198 036 90010
7708	Transistor, PNP, BC857B.	3198 010 42150	9154	Wire Jumper, 0.58MM.	3198 036 90010
7710	Transistor, NPN, BC847B.	3198 010 42030	9155	Wire Jumper, 0.58MM.	3198 036 90010
7800	Transistor, NPN, BC847B.	3198 010 42030	9156	Wire Jumper, 0.58MM.	3198 036 90010
7801	Transistor, PNP, BC857B.	3198 010 42150	9157	Wire Jumper, 0.58MM.	3198 036 90010
7802	Transistor, NPN, BC847B.	3198 010 42030	9158	Wire Jumper, 0.58MM.	3198 036 90010
7803	Transistor, PNP, BC857B.	3198 010 42150	9159	Wire Jumper, 0.58MM.	3198 036 90010
7804	Transistor, NPN, BC847B.	3198 010 42030	9160	Wire Jumper, 0.58MM.	3198 036 90010
7805	Transistor, PNP, BC857B.	3198 010 42150	9161	Wire Jumper, 0.58MM.	3198 036 90010
7806	Transistor, NPN, BC847B.	3198 010 42030	9162	Wire Jumper, 0.58MM.	3198 036 90010
7808	Transistor, NPN, BC847B.	3198 010 42030	9163	Wire Jumper, 0.58MM.	3198 036 90010
7809	Transistor, PNP, BC857B.	3198 010 42150	9164	Wire Jumper, 0.58MM.	3198 036 90010
7810	Transistor, NPN, BC847B.	3198 010 42030	9165	Wire Jumper, 0.58MM.	3198 036 90010
7811	Transistor, PNP, BC857B.	3198 010 42150	9166	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9187	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9189	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9231	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9232	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9233	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010	9234	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010	9235	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010	9237	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Assembly	3135 037 12281

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4607	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM MSP3421G-FH-B8V3 (MIAS)Y.	9322 183 23671
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115

S = Safety Part Be sure to use exact replacement part.

7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716	32 Pin IC Socket V F 1.27 PLCC R	2422 486 80938
7716	IC, M87C257-90C1	9322 130 45668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Assembly	3135 037 12271

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7001	IC, M24128-BWMN6	9322 152 35668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Manual Assembly.	3135 037 12541

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

H.O.P. Panel Parts
S = Safety. Be sure to use exact replacement part.

51MP392H/17 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4210	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4211	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

4213	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4220	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4221	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4223	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4230	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4231	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS216.	9340 255 30115
6152	Diode, Signal, BAS216.	9340 255 30115
6161	Diode, Signal, BAS216.	9340 255 30115
6162	Diode, Signal, BAS216.	9340 255 30115
6171	Diode, Signal, BAS216.	9340 255 30115
6172	Diode, Signal, BAS216.	9340 255 30115
6181	Diode, Signal, BAS216.	9340 255 30115
6182	Diode, Signal, BAS216.	9340 255 30115
6186	Diode, Signal, BAS216.	9340 255 30115
6187	Diode, Signal, BAS216.	9340 255 30115
6331	Diode, Signal, BAS216.	9340 255 30115
6495	Diode, Signal, BAS216.	9340 255 30115
6643	Diode, Signal, BAS216.	9340 255 30115
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	PCB LCHDR CRT.	3135 013 32673
0931	ACI,HDR CRT BRD.	3135 018 50341
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 250v, Ceramic	2020 557 90733
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rectifier, PR2007G, A (LITO) A	9322 196 90673
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

	Keyboard Parts	
1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

	Side Jack Panel Parts	
1001	Cinch Connector.	2422 026 04756
1335	Connector, 10 Pin.	2422 025 12484

S = Safety Part Be sure to use exact replacement part.

51MP392H/17 (continued)

1337	Connector, 1 Pin	2422 015 18552
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
4000	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6003	Zener Diode, 6.8 volt.	9340 386 40115
6005	Zener Diode, 6.8 volt.	9340 386 40115
6006	Zener Diode, 6.8 volt.	9340 386 40115
6007	Zener Diode, 6.8 volt.	9340 386 40115
6008	Zener Diode, 6.8 volt.	9340 386 40115
6009	Zener Diode, 6.8 volt.	9340 386 40115
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel.	3135 037 12321

51MP3964H/17 - Manual no. 7621

Rear Switch Panel Parts

Rear Switch Panel Parts

Input Board Parts

Input Board Parts

CBA	Input Board.	3135 037 10591
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0231	Heatsink, TO-220	3135 011 03291
0320	Barcode Label 32 mm x 6 mm	3121 233 43911
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2006	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2206	Cap, 220u, 20%, 25v, Electrolytic. .	2020 012 92641
2206	Cap, 220u, 20%, 25v, Electrolytic. .	2020 012 93065
2208	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2215	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471
2216	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471
2217	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471
2218	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558 90519
2226	Cap, 22n, +80/-20%, 50v, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50v, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010
2283	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2287	Cap, 470n, 20%, 50v, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50v, Ceramic . .	3198 019 21030
2290	Cap, 1u, 20%, 50v, Electrolytic. . .	2020 012 92647
2290	Cap, 1u, 20%, 50v, Electrolytic. . .	2020 012 93122
2292	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50v, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558 90519
2296	Cap, 10u, 20%, 50v, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6207	Diode, Rect, BYV95A	9335 000 90133
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
7214	Transistor, NPN, BC547B.	3198 020 40030
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
S 1000	Fuse, Clip, 5A, 250V, IEC.	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275v, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, 50v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, 50v, Ceramic.	2020 554 90173
2005	Cap, 220n, 20%, 275v, Metalized Polyp ropylene	2222 336 29146
S 2011	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200v, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2213	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91374
2213	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91551
2219	Cap, 470u, 20%, 200v, Electrolytic .	2020 021 91321
2270	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91374
2270	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91551
2284	Cap, 1000u, 20%, 35v, Electrolytic .	2020 021 91411
2284	Cap, 1000u, 20%, 35v, Electrolytic .	2020 021 91636
2285	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91374
2285	Cap, 2u2, 20%, 25v, Electrolytic . .	2020 021 91551
2286	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93401
2286	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93458
2289	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93401
2289	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93458
2291	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93401
2291	Cap, 1000u, 20%, 25v, Electrolytic .	2020 012 93458
S 2295	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	VDR, DC, 1MA/495V, MAX 850VB. . . .	2322 595 90021
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
5000	Filter, Mains, 8mH, 7A, JLB2806. . .	2422 549 44591
5201	Filter, Mains, 100uH, 2A2, W8051 . .	2422 549 44101
5202	Transformer, US28103-00 B.	2422 531 02496
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6231	Diode, Rect, PBYR10100X	9340 555 24127
7213	Optic Coupler, CQY80NG	9338 941 50682
7215	FET POW IRF9Z24N (INR0) L . . .	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687

Kimball Optical Assembly Parts

Kimball Optical Assembly Parts

CBA	Kimball Optical Assembly	3121 237 55181
0040	Rail 50" TO 55" (2 used)	3135 011 03641
0041	Support Rail Common (2 used)	3135 011 02171
0091	Bracket, Focus Control (Not Shown) .	3135 034 00772
0102	Bracket, CRT, Spring	3135 011 02371
0105	Cap Coupler (3 used)	3135 034 02561
0106	Spring, Compression (4 Used)	3135 011 00611
0142	RTV #133	3135 010 02031
0144	Diaphram, Coupler.	3135 013 01061
0146	Plug Vent (3 used)	3135 034 02551
0147	Seal, Vent Plug.	3135 013 01231
0149	Seal, CRT.	3135 013 02321
0150	Seal, Lens	3135 013 02632
0151	Pad, CRT (Not Shown) (4 Used). . . .	3135 014 02811
1183	Focuspot 100M 15KV HSB226 B . . .	2422 549 45941

Magnavox Optical Assembly Parts

Magnavox Optical Assembly Parts

CBA	Magnavox Optical Assembly.	3135 037 74251
0920	Optical Assembly	3121 237 55171
0093	Coupler 54V 50W (Red & Blue)	3135 011 01936
0094	Coupler Green.	3135 011 04283
0096	C Element Green CR	3135 034 04401
0097	C Element Clear CR (Red & Blue). . .	3135 034 04411
0099	Lens Delta 78 (3 used)	3135 013 00822
0148	Crossover Assembly	3135 010 02041

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

1097	CRT P16LXL00RFA(U) (HITJ) B . . .	9322 194 69682
1098	CRT P16LXL00HHA(U) (HITJ) B . . .	9322 194 70682
1099	CRT P16LXL00BMB(U) (HITJ) B . . .	9322 194 71682
1117	CRT Panel, (All)	3135 037 10081
1121	CRT Panel, (All)	3135 037 10081
1123	CRT Panel, (All)	3135 037 10081
5201	Yoke, Green DAV4360M.	2422 549 45208
5202	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
5203	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
0921	Kimball Optical Assembly	3121 237 55181
0040	RAIL 50" TO 55" (2 used)	3135 011 03641
0041	Support Rail Common (2 used)	3135 011 02171
0091	Bracket, Focus Control (Not Shown) .	3135 034 00772
0102	Bracket, CRT, Spring	3135 011 02371
0105	Cap Coupler (3 used)	3135 034 02561
0106	Spring, Compression (4 Used)	3135 011 00611
0142	RTV #133	3135 010 02031
0144	Diaphram, Coupler.	3135 013 01061
0146	Vent Plug (3 used)	3135 034 02551
0147	Seal, Vent Plug.	3135 013 01231
0149	Seal, CRT.	3135 013 02321
0150	Seal, Lens	3135 013 02632
0151	Pad, CRT (Not Shown) (4 Used). . . .	3135 014 02811
1183	Focuspot 100M 15KV HSB226 B . . .	2422 549 45941

Philips Optical Assembly Parts

	Philips Optical Assembly Parts	
CBA	Philips Optical Assembly	3121 237 55171
0093	Coupler 54V 50W (2 used)	3135 011 01936
0094	Coupler Green.	3135 011 04283
0096	C Element Green CR	3135 034 04401
0097	C Element Clear CR (2 used).	3135 034 04411
0099	Lens Delta 78 (3 used)	3135 013 00822
0148	Crossover Assembly	3135 010 02041
1097	CRT, P16LXL00RFA(U) (HITJ) B. . .	9322 194 69682
1098	CRT, P16LXL00HHA(U) (HITJ) B. . .	9322 194 70682
1099	CRT, P16LXL00BMB(U) (HITJ) B. . .	9322 194 71682
1117	CRT Panel, (All)	3135 037 10081
1121	CRT Panel, (All)	3135 037 10081
1123	CRT Panel, (All)	3135 037 10081
5201	Yoke, Green DAV4360M.	2422 549 45208
5202	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
5203	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC03	Keyboard Assembly.	3135 037 10551
AC03	Customer Control Housing	3135 037 54322
AC04	Back Cover, Lower.	3135 033 01261
AC05	Cabinet Assembly, Magnavox	3135 037 54151
AC06	Frame, Chassis	3135 034 00606
AC09	Frame, Screen.	3135 037 54331
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Fresnel Lens 51"	3135 033 20701
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC16	Screen, Protector, 51W	3135 034 02291
AC17	Light Barrier (UL)	3135 033 01271
AC18	2nd Surface Mirror	3135 034 90171
AC22	Side Jack Panel Assembly	3135 037 54161
AC25	Speaker, 8R, 15W	2422 264 00455
AC31	Magnavox Nameplate	3141 050 00451
AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
AC34	Owner's Manual	3135 035 22982
AC35	Quick Use Guide.	3135 035 22992
CBA	Philips Optical Assembly	3121 237 55171
CBA	CRT Panel.	3135 037 10081
CBA	Magnavox Optical Assembly.	3135 037 74251
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M. . . .	2422 549 45209
FG2	Focuspot, 100M, 15KV HSB226	2422 549 45941
REMOTE	Remote Transmitter (RC1112709/00). .	3139 238 07301
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
X2	Delta Lens (3)	3135 013 00822
X3	Lens C Element Green	3135 034 04401
X3	Lens C Element Clear (2)	3135 034 04411
X4	Seal, Lens	3135 013 02632
X5	Cap Coupler (3).	3135 034 02561
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Vent Plug (3).	3135 034 02551
X9	Coupler, Red or Blue	3135 011 01936
X9	Coupler, Green	3135 011 04283
AC28	Screen Retainer, Horizontal.	3135 034 04741
AC29	Screen Retainer, Vertical (2). . . .	3135 034 04761
CBA	Button Assembly Housing.	3135 037 54312

LSB Panel Parts

S = Safety Part. Be sure to use exact replacement part.

LSB Panel Parts

0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0382	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
S 1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic. . . .	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545

51MP3964H/17 (continued)

2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2816	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2222 479 90022
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, SMT Layer, US54304-00 B	2422 531 00024
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 2u2.	2422 535 91014
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYV95A	9335 000 90133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS216.	9340 255 30115
6808	Diode, Signal, BAS216.	9340 255 30115
6809	Diode, Rect, BYV95C	9335 001 80113
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS216.	9340 255 30115
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS216.	9340 255 30115
6818	Diode, Signal, BAS216.	9340 255 30115
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS216.	9340 255 30115
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS216.	9340 255 30115
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS216.	9340 255 30115
6830	Diode, Signal, BAS216.	9340 255 30115
6831	Diode, Signal, BAS216.	9340 255 30115
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS216.	9340 255 30115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS216.	9340 255 30115
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS216.	9340 255 30115
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS216.	9340 255 30115
6913	Diode, Signal, BAS216.	9340 255 30115
6914	Diode, Signal, BAS216.	9340 255 30115
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel.	3135 037 12571

SSM Panel Parts

	SSM Panel Parts	
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0110	Heatsink	3135 031 60071
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 16v, Electrolytic . .	2020 021 91763
2731	Cap, 2u2, 20%, 16v, Electrolytic . .	2020 021 91763
2732	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2733	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2735	Cap, 10u, 20%, 50v, Electrolytic . .	3198 029 51090
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
2814	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3797	Res, 180K, 5%, 1/10W, Metalized Glass	2120 108 91721
3798	Wire Jumper, 0.58MM.	3198 036 90010
3799	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 330 ohm, 5%, 1/3W, Metal Film .	2322 205 33331
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4015	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4016	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4018	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4019	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Wire Jumper, 0.58MM.	3198 036 90010
5710	Wire Jumper, 0.58MM.	3198 036 90010
5711	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5712	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYV95A	9335 000 90133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Zener Diode, 5.1 volt.	9340 386 10115
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

7007	Transistor, NPN, BC817-25.	3198 010 43230	9136	Wire Jumper, 0.58MM.	3198 036 90010
7016	Transistor, NPN, BC847B.	3198 010 42030	9137	Wire Jumper, 0.58MM.	3198 036 90010
7017	IC, CXA2089S	9322 162 27682	9138	Wire Jumper, 0.58MM.	3198 036 90010
7044	IC, STK392-120	9322 123 44682	9139	Wire Jumper, 0.58MM.	3198 036 90010
7045	IC, STK392-120	9322 123 44682	9140	Wire Jumper, 0.58MM.	3198 036 90010
7101	IC, L7912CV.	9337 107 20682	9141	Wire Jumper, 0.58MM.	3198 036 90010
7102	IC, L7908CV.	9322 069 79682	9142	Wire Jumper, 0.58MM.	3198 036 90010
7103	IC, L7912CV.	9335 040 20682	9143	Wire Jumper, 0.58MM.	3198 036 90010
7105	IC, L7912CV.	9335 202 90682	9144	Wire Jumper, 0.58MM.	3198 036 90010
7106	IC, LM317T	9337 220 80682	9145	Wire Jumper, 0.58MM.	3198 036 90010
7208	Transistor, NPN, BC847B.	3198 010 42030	9146	Wire Jumper, 0.58MM.	3198 036 90010
7700	IC, TDA7490L	9322 163 86682	9148	Wire Jumper, 0.58MM.	3198 036 90010
7701	Transistor, NPN, BC847B.	3198 010 42030	9149	Wire Jumper, 0.58MM.	3198 036 90010
7704	Transistor, NPN, BC847B.	3198 010 42030	9150	Wire Jumper, 0.58MM.	3198 036 90010
7705	Transistor, NPN, BC847B.	3198 010 42030	9151	Wire Jumper, 0.58MM.	3198 036 90010
7706	Transistor, PNP, BC857B.	3198 010 42150	9152	Wire Jumper, 0.58MM.	3198 036 90010
7707	Transistor, NPN, BC847B.	3198 010 42030	9153	Wire Jumper, 0.58MM.	3198 036 90010
7708	Transistor, PNP, BC857B.	3198 010 42150	9154	Wire Jumper, 0.58MM.	3198 036 90010
7710	Transistor, NPN, BC847B.	3198 010 42030	9155	Wire Jumper, 0.58MM.	3198 036 90010
7800	Transistor, NPN, BC847B.	3198 010 42030	9156	Wire Jumper, 0.58MM.	3198 036 90010
7801	Transistor, PNP, BC857B.	3198 010 42150	9157	Wire Jumper, 0.58MM.	3198 036 90010
7802	Transistor, NPN, BC847B.	3198 010 42030	9158	Wire Jumper, 0.58MM.	3198 036 90010
7803	Transistor, PNP, BC857B.	3198 010 42150	9159	Wire Jumper, 0.58MM.	3198 036 90010
7804	Transistor, NPN, BC847B.	3198 010 42030	9160	Wire Jumper, 0.58MM.	3198 036 90010
7805	Transistor, PNP, BC857B.	3198 010 42150	9161	Wire Jumper, 0.58MM.	3198 036 90010
7806	Transistor, NPN, BC847B.	3198 010 42030	9162	Wire Jumper, 0.58MM.	3198 036 90010
7808	Transistor, NPN, BC847B.	3198 010 42030	9163	Wire Jumper, 0.58MM.	3198 036 90010
7809	Transistor, PNP, BC857B.	3198 010 42150	9164	Wire Jumper, 0.58MM.	3198 036 90010
7810	Transistor, NPN, BC847B.	3198 010 42030	9165	Wire Jumper, 0.58MM.	3198 036 90010
7811	Transistor, PNP, BC857B.	3198 010 42150	9166	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9187	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9189	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9231	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9232	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9233	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010	9234	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010	9235	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010	9237	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Assembly	3135 037 12281

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic. . . .	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic. . . .	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper . . .	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper . . .	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper . . .	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic. . . .	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic. . . .	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic. . . .	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic. . . .	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic. . . .	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic. . . .	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic. . . .	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic. . . .	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic . . .	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic. . . .	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic . . .	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic . . .	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4607	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM MSP3421G-FH-B8V3 (MIAS)Y.	9322 183 23671
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115

S = Safety Part Be sure to use exact replacement part.

7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716	32 Pin IC Socket V F 1.27 PLCC R	2422 486 80938
7716	IC, M87C257-90C1	9322 130 45668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Assembly	3135 037 12271

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7001	IC, M24128-BWMN6	9322 152 35668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Manual Assembly.	3135 037 12541

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

H.O.P. Panel Parts

S = Safety. Be sure to use exact replacement part.

51MP3964H/17 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4210	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4211	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

4213	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4220	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4221	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4223	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4230	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4231	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS216.	9340 255 30115
6152	Diode, Signal, BAS216.	9340 255 30115
6161	Diode, Signal, BAS216.	9340 255 30115
6162	Diode, Signal, BAS216.	9340 255 30115
6171	Diode, Signal, BAS216.	9340 255 30115
6172	Diode, Signal, BAS216.	9340 255 30115
6181	Diode, Signal, BAS216.	9340 255 30115
6182	Diode, Signal, BAS216.	9340 255 30115
6186	Diode, Signal, BAS216.	9340 255 30115
6187	Diode, Signal, BAS216.	9340 255 30115
6331	Diode, Signal, BAS216.	9340 255 30115
6495	Diode, Signal, BAS216.	9340 255 30115
6643	Diode, Signal, BAS216.	9340 255 30115
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	PCB LCHDR CRT.	3135 013 32673
0931	ACI,HDR CRT BRD.	3135 018 50341
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 250v, Ceramic	2020 557 90733
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rectifier, PR2007G, A (LITO) A	9322 196 90673
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

	Keyboard Parts	
1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

	Side Jack Panel Parts	
1001	Cinch Connector.	2422 026 04756
1335	Connector, 10 Pin.	2422 025 12484

S = Safety Part Be sure to use exact replacement part.

51MP3964H/17 (continued)

1337	Connector, 1 Pin	2422 015 18552
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
4000	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6003	Zener Diode, 6.8 volt.	9340 386 40115
6005	Zener Diode, 6.8 volt.	9340 386 40115
6006	Zener Diode, 6.8 volt.	9340 386 40115
6007	Zener Diode, 6.8 volt.	9340 386 40115
6008	Zener Diode, 6.8 volt.	9340 386 40115
6009	Zener Diode, 6.8 volt.	9340 386 40115
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel.	3135 037 12321

51PP9303H/17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin.	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

AC04	LOWER BACK	3135 033 00931

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 11661

Rear Switch Panel Parts

Rear Switch Panel Parts

Model 51PP9303H/17 Cabinet Parts

Model 51PP9303H/17 Cabinet Parts

S	AC01	Power Cord, USA, 7A, 2M4	2422 070 98164
	AC02	Backcover, Upper, 51W.	3135 034 02281
	AC03	Customer Control Housing	3135 037 51402
	AC04	Backcover, Lower	3135 033 00931
	AC07	Barrier, Rear, 51W	3135 033 01012
	AC09	Screen, Frame Assembly,51W	3135 037 52111
	AC10	Bracket, Mirror Lower.	3135 034 02451
	AC13	LENS, IR Receiver.	3135 034 00861
	AC14	LENS, Fresnel.	3135 033 20341
	AC15	LENS, Lenticular, Fine Pitch	3135 033 20331
	AC16	Protector Screen, 51W.	3135 034 02291
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror, Mylar, 51W	3135 037 52141
	AC22	Bracket, Side Jack	3135 037 50633
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror Support.	3135 011 03005
	AC28	Retainer, Screen, Horiz, (Top)	3135 034 03401
	AC28	Retainer, Screen, Horiz, (Bottom).	3135 034 03411
	AC29	Retainer, Screen, Vert	3135 034 03421
	AC30	Baffle, Assembly, 51W (w/Control Housing & IR LENS)	3135 037 52241
	AC31	Wordmark, Philips, Dark Silver	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	Owner's Manual, American English	3135 035 21361
	AC36	Bracket, Chassis Holdown	3135 011 02011
	AC38	Cup, Baffle Mounting	3135 013 02461
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mirror Mylar.	3135 031 20431
	AC41	Bracket, Speaker 4X6 (Not Shown)	3135 034 02401
	AC42	Handle, PTV (Not Shown).	3135 034 03811
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English.	3135 035 21351
S	DEFL	DEFL YOKE BY01715 (Red, Green, & Blue).	2422 549 45509
S	FG2	Focuspot, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X12	Bracket, CRT, Spring	3135 011 02371
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown) (4 Used).	3135 014 02811
	X2	Lens, Delta 250.	3135 037 50711
	X3	Lens, C-Element, Green	3135 034 00731
	X3	Lens, C-Element, Clear	3135 034 00721
	X4	Seal, Lens	3135 013 02632
	X5	Coupler, Cap	3135 034 02561
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 034 02551
	X9	Coupler, 54V 50W	3135 011 01936
	X9	Coupler, Green	3135 011 04283

Cabinet & Accessory Parts

Cabinet & Accessory Parts

LSB Panel Parts

LSB Panel Parts

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

	0033	Heatsink, TO-220	3135 011 03291		2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0034	Heatsink, Vertical	3135 011 04591		2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	0035	Heatsink, TO-220	3135 011 03291		2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0037	Heatsink, TO-220	3135 011 03291		2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	0039	Heatsink, TO-220	3135 011 03291		2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	0041	Heatsink, TO-220	3135 011 03291		2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0043	Heatsink, TO-220	3135 011 03291		2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	0045	Heatsink, TO-220	3135 011 03291		2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	0047	Heatsink, TO-220	3135 011 03291		2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0081	Heatsink, TO-247	3135 011 00553		2815	Cap, 10u, 20%, 250V, Electrolytic	2020 012 93495
	0082	Heatsink, Vertical Out	3135 037 50741		2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	0085	Heatsink, TO-220	3135 011 03291		2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	0129	Insulator	3135 010 02321		2819	Cap, 22n, 5%, 630v, Polypropylene	2222 375 90219
	0134	IC-Spring, Clip for 6810	3135 011 01512		2820	Cap, 4u7, 10%, 100V, Metalized Polyester	2222 368 90178
	0180	Heatsink	3135 031 60051		2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	0181	IC-Spring, Clip for 6810	3135 011 01512		2822	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	0182	IC, Spring	3135 011 02331		2823	Cap, 2n2, 10%, 50V, Ceramic	3198 019 12220
	0381	IC, Spring	3135 011 02331		2824	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	0383	Insulator	3135 030 50051		2825	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
	1000	Heatsink, TO-220	3135 011 03291		2826	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	1202	Connector, 4 Pin	2422 025 12479		2827	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035		2828	Cap, 470n, 10%, 63V, Metalized Polyester	2222 365 75474
	1500	Connector, 5 Pin	2422 025 11472		2829	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	1501	Connector, 4 Pin	2422 025 16153		2830	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
	1502	Connector, 4 Pin	2422 025 16153		2831	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	1503	Connector, 4 Pin	2422 025 16153		2832	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030
	1504	Connector, 3 Pin	2422 025 14409		2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	1505	Connector, 1 Pin	2422 015 18552		2834	Cap, 470p, 10%, 500V, Ceramic	3198 019 44710
	1506	Connector, 1 Pin	2422 015 18552		2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
	1510	Connector, 12 Pin	2422 025 08333		2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	1516	Connector, 12 Pin	2422 025 08333		2837	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
	1518	Connector, 12 Pin	2422 025 08333		2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
S	1801	Fuse, 2 A, 250V IEC	2422 086 10783		2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779		2840	Cap, 2n2, 10%, 1KV, Ceramic	3198 019 52220
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779		2841	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675		2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
	1901	Connector, 3 Pin	2412 020 00725		2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2301	Cap, 2n2, 10%, 2KV, Ceramic	2020 558 90559		2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2845	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	2303	Cap, 100u, 20%, 25V, Electrolytic	2020 012 92639		2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554		2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710		2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2306	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080		2902	Cap, 2n2, 10%, 1KV, Ceramic	3198 019 52220
	2307	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720		2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
	2308	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720		2904	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290		2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810		2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020		2907	Cap, 4n7, 10%, 250V, Metalized Polyester	2222 370 35472
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321		2910	Cap, 33n, 10%, 50V, Ceramic	3198 017 03330
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321		2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2917	Cap, 47u, 20%, 200V, Electrolytic	2020 012 93486
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		2918	Cap, 2n2, 10%, 1KV, Ceramic	3198 019 52220
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2920	Cap, 4u7, 20%, 250V, Electrolytic	2020 012 93293
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		2926	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	2328	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080		2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	2334	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720		3304	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3305	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090		3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass	3198 021 51590
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321		3307	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3308	Res, 0R22, 5%, 3/5W, Metal Film	3198 012 12270
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030		3309	Res, 0R22, 5%, 3/5W, Metal Film	3198 012 12270
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3310	Res, 390 ohm, 5%, 1/6W, Carbon Film	3198 011 03910
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210		3311	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790		3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3314	Res, 82K, 5%, 1/6W, Carbon Film	3198 011 08230
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3316	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
	2370	Cap, 100p, 10%, 500V, Ceramic	3198 019 41010		3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3322	Zero ohm, ""chip"" Jumper	2120 368 90118
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040				
S	2390	Cap, 2n2, 20%, v, Ceramic	2020 554 90173				
	2801	Cap, 47u, 20%, 160v, Electrolytic	2020 012 93545				
	2802	Cap, 22u, 20%, 250V, Electrolytic	2020 012 93386				
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555				
	2804	Cap, 470u, 20%, 35V, Electrolytic	3198 026 44710				

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic.	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2733	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2735	Cap, 10u, 20%, 50v, Electrolytic . .	3198 029 51090
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
2814	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3794	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3795	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3797	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 330 ohm, 5%, 1/3W, Metal Film .	2322 205 33331
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4015	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4016	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Wire Jumper, 0.58MM.	3198 036 90010
5710	Wire Jumper, 0.58MM.	3198 036 90010
5711	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5712	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYV95A	9335 000 90133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Zener Diode, 5.1 volt.	9340 386 10115
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11222

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic. . . .	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716	IC, M87C257-90C1	9322 130 45668
7717	IC, ROM, M87C257 R_MERGE4.	3104 317 04491
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic 51W) . . .	3135 037 11711

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7001	IC, M24128-BWMN6	9322 152 35668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11383

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

Rear Switch Panel Parts

Rear Switch Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper	3135 034 02281
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 51W	3135 037 52111
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel 51W.	3135 033 20341
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC16	Screen, Protector, 51W	3135 034 02291
AC17	Barrier, Light	3135 034 00891
AC18	Mirrorr, Mylar, 51W.	3135 037 52141
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror, Support	3135 011 03005
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Vert 51W	3135 034 02271
AC29	Retainer, Screen, Horiz 51W.	3135 034 02261
AC30	Baffle, 51W.	3135 037 52241
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20431
AC41	Bracket, Focus Control (Not Shown)	3135 034 00772
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21371
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 54V, 50W (Red & Blue)	3135 011 01935
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

LSB Panel Parts

0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429	
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291	
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310	
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472	
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478	
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790	
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486	
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020	
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223	
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221	
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221	
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590	
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270	
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270	
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910	
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590	
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540	
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118	
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702	
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004	
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730	
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310	
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703	
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510	
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221	
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870	
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020	
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201	
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201	
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201	
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710	
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780	
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872	
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872	
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720	
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080	
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710	
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580	
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580	
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720	
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080	
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472	
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472	
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730	
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3135 037 12001

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin.	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

S = Safety Part Be sure to use exact replacement part.

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper	3135 034 02281
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
AC09	Frame, Screen, 51W	3135 037 52111
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel 51W.	3135 033 20341
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC16	Screen, Protector, 51W	3135 034 02291
AC17	Barrier, Light	3135 034 00891
AC18	Mirrorr, Mylar, 51W.	3135 037 52141
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror, Support	3135 011 03005
AC27	Overlay, Rear Jack	3135 030 00221
AC28	Retainer, Screen, Vert 51W	3135 034 02271
AC29	Retainer, Screen, Horiz 51W.	3135 034 02261
AC30	Baffle, 51W.	3135 037 52241
AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
AC34	Owner's Manual, American English . .	3135 035 21361
AC38	Cup, Baffle Mounting	3135 013 61027
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20431
AC41	Bracket, Focus Control (Not Shown) .	3135 034 00772
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English. .	3135 035 21351
S DEFL	Deflection Yoke, BY01715 (3 Used). .	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 54V, 50W (Red & Blue) . . .	3135 011 01935
X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC-Spring, Clip for 6810	3135 011 01512	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0381	IC, Spring	3135 011 02331	
0383	Insulator.	3135 030 50051	
1000	Heatsink, TO-220	3135 011 03291	
1202	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429	
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291	
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310	
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780	
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2907	Cap, 4n7, 10%, 250V, Metalized Polyester	2222 370 35472	
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478	
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2917	Cap, 47u, 20%, 200V, Electrolytic.	2020 012 93486	
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020	
2920	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293	
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223	
3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221	
3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221	
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3305	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass	3198 021 51590	
3307	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3308	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270	
3309	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270	
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910	
3311	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590	
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3314	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230	
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540	
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118	

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic.	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11221

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic 51W) . . .	3135 037 11711

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742

S = Safety Part Be sure to use exact replacement part.

1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

51PW936317F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

Rear Switch Panel Parts

Rear Switch Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper	3135 034 02281
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 51W	3135 037 52111
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel 51W.	3135 033 20341
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC16	Screen, Protector, 51W	3135 034 02291
AC17	Barrier, Light	3135 034 00891
AC18	Mirrorr, Mylar, 51W.	3135 037 52141
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror, Support	3135 011 03005
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Vert 51W	3135 034 02271
AC29	Retainer, Screen, Horiz 51W.	3135 034 02261
AC30	Baffle, 51W.	3135 037 52241
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20431
AC41	Bracket, Focus Control (Not Shown)	3135 034 00772
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21371
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 54V, 50W (Red & Blue)	3135 011 01935
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

LSB Panel Parts

0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3135 037 12001

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle Assembly.	3135 037 50381
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC, Spring	3135 011 02331
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0183	Insulator.	3135 010 02351
	0184	Terminal	3135 010 02801
	0381	IC, Spring	3135 011 02331
	0382	Spring Clip for 7805	3135 011 02621
	0383	Insulator.	3135 030 50051
	0384	Terminal	3135 010 02801
	0385	Terminal	3135 010 02801
	1000	Heatsink, TO-220	3135 011 03291
	1002	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 5V, 5A.	2422 132 07314
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2917	Cap, 47u, 20%, 200V, Electrolytic.	2020 012 93486
	2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2920	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
	2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3305	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
	3307	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3308	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3309	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3311	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3314	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230
	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic. . . .	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic. . . .	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55PP935201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle Assembly.	3135 037 50381
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC, Spring	3135 011 02331
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0183	Insulator.	3135 010 02351
	0184	Terminal	3135 010 02801
	0381	IC, Spring	3135 011 02331
	0382	Spring Clip for 7805	3135 011 02621
	0383	Insulator.	3135 030 50051
	0384	Terminal	3135 010 02801
	0385	Terminal	3135 010 02801
	1000	Heatsink, TO-220	3135 011 03291
	1002	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 5V, 5A.	2422 132 07314
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2917	Cap, 47u, 20%, 200V, Electrolytic.	2020 012 93486
	2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2920	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
	2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3305	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
	3307	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3308	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3309	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3311	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3314	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230
	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT	9333 729 60653
7402	IC, HEF4053BT	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4	9352 639 81557
7802	IC, LD1117V33	9322 123 54687
7803	IC, TDA8601T/C1	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

	AC30	Baffle, 55W.	3135 037 51651
	AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
	AC34	Owner's Manual, American English . .	3135 035 21381
	AC38	Baffle Mounting Cup.	3135 013 02761
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mylar Mirror.	3135 031 20061
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English. .	3135 035 21371
S	DEFL	Deflection Yoke, BY01715 (3 Used). .	2422 549 45509
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, 60 55W.	3135 011 04272
	X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

1020	Connector, SIMM, 80 Pin.	2422 025 17242	
1021	Socket, Cinch, 2 Pin	2422 026 05293	
1024	Socket, Cinch, 12 Pin.	2422 026 05064	
1025	Socket, MDIN, 10 Pin	2422 026 04926	
1026	Socket, MDIN, 10 Pin	2422 026 04926	
1027	Socket, Cinch, 2 Pin	2422 026 05294	
1028	Connector, 3 Pin	2422 025 09191	
1030	Connector, 3 Pin	2422 025 11117	
1043	Connector, 10 Pin.	2422 025 16587	
1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1201	Connector, 10 Pin.	2422 025 12484	
1222	Connector, 5 Pin	2422 025 12481	
1250	Connector, 9 Pin	2422 025 16049	
1272	Connector, 3 Pin	2412 020 00725	
1302	Connector, 2 Pin	2422 025 09405	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin, 130mm.	3135 031 00601	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1702	Thyristor, BT169B.	9338 268 50126	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	
9154	Wire Jumper, 0.58MM.	3198 036 90010		9252	Wire Jumper, 0.58MM.	3198 036 90010	
9155	Wire Jumper, 0.58MM.	3198 036 90010		9254	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010		9255	Wire Jumper, 0.58MM.	3198 036 90010	
9157	Wire Jumper, 0.58MM.	3198 036 90010		9256	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010		9257	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290

S = Safety Part Be sure to use exact replacement part.

2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

Cabinet & Accessory Parts

AC04	Lower Back Cover	3135 033 00931

55PP9502/84 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used) .	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used) . .	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used). . .	3135 034 01281
AC30	Baffle,.	3135 037 50851
AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC41	Bracket, Sensor ACS, (Not shown) . .	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9)	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

1029	Socket, Cinch, 1 Pin	2422 026 04425	
1030	Connector, 3 Pin	2422 025 11117	
1043	Connector, 10 Pin.	2422 025 16587	
1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090	
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090	
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

SSB Panel Parts

55PP9502/84 (continued)

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

2462 Cap, 68p, 5%, 50V, Ceramic 3198 016 06890
2464 Cap, 3p3, 8%, 50V, Ceramic 3198 016 03380
2470 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2471 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2472 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2473 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2480 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2481 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2482 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2483 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2490 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2491 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2492 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2493 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2500 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2501 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2502 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2505 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2506 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2507 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2509 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2510 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2511 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2519 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2520 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2521 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2529 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2601 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2602 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2607 Cap, 47n, 10%, 25V, Ceramic. 3198 023 04730
2615 Cap, 100n, 5%, 16V, Polypropylene. . 2020 319 90005
2616 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2617 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2618 Cap, 2u2, +80/-20%, 10V, Ceramic . . 3198 017 22250
2619 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2620 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2621 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2626 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2627 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2628 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2630 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2631 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2632 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2633 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2634 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2635 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2636 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2637 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2638 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2639 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2644 Cap, 100p, 5%, 50V, Ceramic. 3198 016 01010
2700 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2701 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2702 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2704 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2710 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2711 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2714 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2720 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2721 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2724 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2731 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2740 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2741 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2750 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2800 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2802 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2804 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2806 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2807 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2809 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2810 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2811 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2812 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2813 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2814 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2815 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2816 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2901 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2902 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2903 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2904 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2905 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2906 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2909 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2910 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2911 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2912 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2913 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2922 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2923 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2924 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790

2931 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2933 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2944 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2945 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2951 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2952 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2953 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2957 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2958 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2961 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2963 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2968 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
3150 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3151 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3160 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3161 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3170 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3171 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3180 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3181 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3185 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3186 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3247 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3248 Res, 470K, 5%, 1/10W, Metalized Glass 3198 021 54740
3251 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3261 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3271 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3281 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3286 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3320 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3321 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3323 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3324 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3325 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3326 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3331 Res, 1M, 5%, 1/10W, Metalized Glass. 3198 021 51050
3332 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3333 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3335 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3336 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3339 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3410 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3411 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3412 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3413 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3414 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3415 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3416 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3418 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3419 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3420 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3421 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3422 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3424 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3425 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710
3426 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3427 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3428 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3429 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3430 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3431 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3432 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3433 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3434 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3435 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

55PP950201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle,.	3135 037 50851
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

55PP950217 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle,.	3135 037 50851
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

55PW936317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

	AC30	Baffle, 55W.	3135 037 51651
	AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
	AC34	Owner's Manual, American English . .	3135 035 21381
	AC38	Baffle Mounting Cup.	3135 013 02761
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mylar Mirror.	3135 031 20061
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English. .	3135 035 21371
S	DEFL	Deflection Yoke, BY01715 (3 Used). .	2422 549 45509
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, 60 55W.	3135 011 04272
	X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	
9154	Wire Jumper, 0.58MM.	3198 036 90010		9252	Wire Jumper, 0.58MM.	3198 036 90010	
9155	Wire Jumper, 0.58MM.	3198 036 90010		9254	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010		9255	Wire Jumper, 0.58MM.	3198 036 90010	
9157	Wire Jumper, 0.58MM.	3198 036 90010		9256	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010		9257	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557

S = Safety Part Be sure to use exact replacement part.

7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580

S = Safety Part Be sure to use exact replacement part.

5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

Cabinet & Accessory Parts

AC04	Lower Back Cover	3135 033 00931

55PW9383/17F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle, 55W.	3135 037 52301
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 60 55W.	3135 011 04272
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle, 55W.	3135 037 52301
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 60 55W.	3135 011 04272
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 3 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Cover, Back, Upper	3135 034 00171
AC03	Controls, Customer	3135 014 11143
AC04	Back, Lower.	3135 033 00121
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00141
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
AC09	Frame, Screen.	3135 017 07281
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 033 20011
AC15	Screen, Lenticular	3135 033 20091
AC16	Screen, Protector.	3135 034 01311
AC17	Barrier, Light	3135 034 00891
AC18	Mirror Assembly, Mylar	3135 037 51171
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, PIP Panel	3135 030 00032
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01261
AC30	Baffle, Assembly	3135 037 50361
AC31	Nameplate.	3135 015 02511
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP920201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Cover, Back, Upper	3135 034 00171
AC03	Controls, Customer	3135 014 11143
AC04	Back, Lower.	3135 033 00121
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00141
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
AC09	Frame, Screen.	3135 017 07281
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 033 20011
AC15	Screen, Lenticular	3135 033 20091
AC16	Screen, Protector.	3135 034 01311
AC17	Barrier, Light	3135 034 00891
AC18	Mirror Assembly, Mylar	3135 037 51171
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, PIP Panel	3135 030 00032
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01261
AC30	Baffle, Assembly	3135 037 50361
AC31	Nameplate.	3135 015 02511
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

7701	Transistor, NPN, BC847B.	3198 010 42030		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9147	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP920217F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Cover, Back, Upper	3135 034 00171
	AC04	Back, Lower	3135 033 00122
	AC06	Frame, Chassis	3135 034 00606
	AC07	Barrier, Rear	3135 033 00141
	AC08	Frame, Rear Jack, 2-Tuner	3135 034 02421
	AC09	Frame, Screen	3135 017 07281
	AC10	Bracket, Mirror, Lower	3135 034 02451
	AC11	Frame, PIP	3135 014 11101
	AC13	Lens, IR, Receiver	3135 034 00861
	AC14	Lens, Fresnel, 60V	3135 033 20211
	AC15	Screen, Lenticular	3135 033 20091
	AC16	Screen, Protector	3135 034 01311
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror Assembly, Mylar	3135 037 51171
	AC21	Bracket, Module	3135 034 00361
	AC22	Frame, Side Jack Panel	3135 037 50632
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror Support	3135 011 03034
	AC27	Overlay, PIP Panel	3135 030 00032
	AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
	AC29	Retainer, Screen, Vert (2 Used)	3135 034 01261
	AC30	Baffle, 60V	3135 037 51701
	AC31	Nameplate	3135 015 02511
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	DFU 60PP9202 HDTV Monitor	3135 035 20391
	AC38	Baffle Mounting Cup	3135 013 02761
	AC39	Caster	3135 030 40031
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
S	DEFL	Deflection Yoke, BY01715 (3 Used)	2422 549 45509
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used)	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used)	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler	3135 013 01061
	X7	Seal, Vent Plug	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, 60 55W	3135 011 04272
	X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0382	IC, Spring	3135 011 02331
	0383	Insulator	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin	2422 025 08333
	1516	Connector, 12 Pin	2422 025 08333
	1518	Connector, 12 Pin	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215

CBA	HOP Panel Assembly (Basic)	3135 037 10061
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP9352/17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH, ...	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50391
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC, Spring	3135 011 02331
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0183	Insulator.	3135 010 02351
	0184	Terminal	3135 010 02801
	0381	IC, Spring	3135 011 02331
	0382	Spring Clip for 7805	3135 011 02621
	0383	Insulator.	3135 030 50051
	0384	Terminal	3135 010 02801
	0385	Terminal	3135 010 02801
	1000	Heatsink, TO-220	3135 011 03291
	1002	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 5V, 5A.	2422 132 07314
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypr opylene.	2022 333 00164
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
	2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
	2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
	3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

60PP935201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50391
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC, Spring	3135 011 02331
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0183	Insulator.	3135 010 02351
	0184	Terminal	3135 010 02801
	0381	IC, Spring	3135 011 02331
	0382	Spring Clip for 7805	3135 011 02621
	0383	Insulator.	3135 030 50051
	0384	Terminal	3135 010 02801
	0385	Terminal	3135 010 02801
	1000	Heatsink, TO-220	3135 011 03291
	1002	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 5V, 5A.	2422 132 07314
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypr opylene.	2022 333 00164
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
	2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
	2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
	3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC04	Back, Lower, 51W	3135 033 00931
AC07	Barrier, Rear.	3135 033 00291
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 51671
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

	AC39	Caster	3135 030 40031
	AC40	Bracket, Mirror, Mylar	3135 031 20131
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English.	3135 035 21371
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used)	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, CRT, Red or Blue.	3135 011 02555
	X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

	1043	Connector, 10 Pin.	2422 025 16587		2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	1102	Connector, 12 Pin.	2422 025 08333		2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
	1106	Tuner, V+U, PLL.	2422 542 90113		2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1200	Filter, Ceramic, 4MHZ5	2422 549 43302		2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1201	Connector, 10 Pin.	2422 025 12484		2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	1222	Connector, 5 Pin	2422 025 12481		2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1250	Connector, 9 Pin	2422 025 16049		2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1272	Connector, 3 Pin	2412 020 00725		2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
	1302	Connector, 2 Pin	2422 025 09405		2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
	1303	Connector, 5 Pin	2422 025 10428		2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
	1335	Connector, 10 Pin.	2422 025 12484		2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
	1344	Connector, 3 Pin	2412 020 00725		2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
	1349	Connector, 5 Pin	2422 025 15832		2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	1410	Cable, 1 Pin, 70mm	3135 031 00531		2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	1411	Cable, 1 Pin, 240mm.	3135 031 00521		2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1412	Cable, 1 Pin, 130mm.	3135 031 00601		2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	1516	Connector, 12 Pin.	2422 025 08333		2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
	1518	Connector, 12 Pin.	2422 025 08333		2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1610	Connector, 5 Pin	2422 025 12481		2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
	1681	Connector, 3 Pin	2422 025 10768		2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S	1700	Fuse, 2 A, 250V IEC.	2422 086 10783		2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S	1701	Fuse, 2 A, 250V IEC.	2422 086 10783		2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	1702	Thyristor, BT169B.	9338 268 50126		2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	1950	Connector, 9 Pin	2422 025 16049		2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090		2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
	2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499		2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090		2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
	2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
	2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
	2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
	2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
	2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
	2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
	2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
	2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730		2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010		2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
	2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
	2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
	2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477		2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
	2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710		2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
	2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
	2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210		2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9177	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9187	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9189	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9202	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9205	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010	9231	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010	9232	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010	9233	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010	9234	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010	9235	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010	9237	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010	9238	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010	9239	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010	9240	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010	9241	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010	9242	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010	9243	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010	9244	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010	9245	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010	9246	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010	9247	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010	9248	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010	9249	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010	9250	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010	9251	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010	9252	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010	9254	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010	9255	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010	9256	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010	9257	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010	9258	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010	9259	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010	9260	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010	9261	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010	9263	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010	9264	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010	9265	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010	9266	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

ACS Manual Assembly

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP938317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 52311
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP9502/17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50861
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP950201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50861
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PW936317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC04	Back, Lower, 51W	3135 033 00931
AC07	Barrier, Rear.	3135 033 00291
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 51671
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21371
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used)	00CL ICK HERE
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

1043	Connector, 10 Pin.	2422 025 16587	2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
1102	Connector, 12 Pin.	2422 025 08333	2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
1106	Tuner, V+U, PLL.	2422 542 90113	2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1201	Connector, 10 Pin.	2422 025 12484	2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
1222	Connector, 5 Pin	2422 025 12481	2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1250	Connector, 9 Pin	2422 025 16049	2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1272	Connector, 3 Pin	2412 020 00725	2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1302	Connector, 2 Pin	2422 025 09405	2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1303	Connector, 5 Pin	2422 025 10428	2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
1335	Connector, 10 Pin.	2422 025 12484	2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1344	Connector, 3 Pin	2412 020 00725	2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
1349	Connector, 5 Pin	2422 025 15832	2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1410	Cable, 1 Pin, 70mm	3135 031 00531	2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
1411	Cable, 1 Pin, 240mm.	3135 031 00521	2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1412	Cable, 1 Pin, 130mm.	3135 031 00601	2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
1516	Connector, 12 Pin.	2422 025 08333	2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1518	Connector, 12 Pin.	2422 025 08333	2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1610	Connector, 5 Pin	2422 025 12481	2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1681	Connector, 3 Pin	2422 025 10768	2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1702	Thyristor, BT169B.	9338 268 50126	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1950	Connector, 9 Pin	2422 025 16049	2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9177	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9187	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9189	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9202	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9205	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010	9231	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010	9232	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010	9233	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010	9234	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010	9235	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010	9237	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010	9238	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010	9239	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010	9240	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010	9241	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010	9242	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010	9243	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010	9244	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010	9245	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010	9246	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010	9247	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010	9248	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010	9249	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010	9250	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010	9251	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010	9252	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010	9254	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010	9255	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010	9256	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010	9257	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010	9258	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010	9259	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010	9260	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010	9261	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010	9263	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010	9264	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010	9265	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010	9266	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

ACS Manual Assembly

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PW938317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 52311
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE

S = Safety Part Be sure to use exact replacement part.

S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

60PW938317F (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP9202/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Backcover, Upper, 43	3135 034 00311	
AC03	Customer Controls.	3135 017 07622	
AC04	Backcover, Lower, 43	3135 034 00652	
AC05	Cabinet Assembly NAFTA 43.	3135 037 50603	
AC06	Frame, Chassis	3135 034 00605	
AC07	Rear Light Barrier, 43	3135 013 03732	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Cabinet, Front	3135 037 50991	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Fresnel Lens 43.	3135 014 10311	
AC15	Lenticular Screen. 43.	3135 033 20141	
AC16	Protector, Screen, 43.	3135 034 00521	
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50681	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror Mounting, 43	3135 011 04611	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, HORZ 43.	3135 034 00821	
AC29	Retainer, Screen, VERT 43.	3135 034 00831	
AC30	Grill Assembly, 43V.	3135 037 50661	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00771	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
S DEFL	Deflection Yoke DAV4362M (Green)	2422 549 45211	
S DEFL	Deflection Yoke DAV4363M (Red & Blue)	2422 549 45212	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta, 240	3135 037 50701	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	
X9	Coupler, 43 Red & Blue (Part of CRT Asm.)	3135 011 04473	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

7710	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9147	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

H.O.P. Panel Parts

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310

S = Safety Part Be sure to use exact replacement part.

43PP9202/17 (continued)

3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP9202/17F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin.	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC03	Customer Control Panel	3135 037 51412
AC04	Backcover, Lower, 43	3135 034 00652
AC06	Frame, Chassis	3135 034 00606
AC07	Rear Light Barrier, 43	3135 013 03732
AC08	Frame, Rear Jack, 2-Tuner	3135 034 02421
AC09	Cabinet, Front	3135 037 51861
AC11	Frame, PIP	3135 014 11101
AC14	Fresnel Lens, 43	3135 033 20171
AC15	Lenticular Screen. 43.	3135 033 20141
AC16	Protector, Screen, 43.	3135 034 00521
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50681
AC23	Grill Assembly, 43V.	3135 037 50661
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Mounting (2 Used)	3135 011 04612
AC27	Overlay, PIP Panel	3135 030 00032
AC28	Retainer, Screen, Horz (2 Used).	3135 034 01931
AC29	Retainer, Screen Vert (2 Used).	3135 034 01941
AC31	Nameplate.	3135 015 02511
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391
AC38	Baffle Mounting Cup.	3135 013 02761
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC48	Foot	3135 010 09741
S DEFL	Deflection Yoke, BY01716 (3 Used).	2422 549 45593
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 240	3135 037 50701
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281
X9	Coupler, 43 & 39W Red & Blue, (Part of CRT Asm.).	3135 011 04474

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0382	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypr opylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 2u2.	2422 535 91014
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS216.	9340 255 30115
6808	Diode, Signal, BAS216.	9340 255 30115
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS216.	9340 255 30115
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS216.	9340 255 30115
6818	Diode, Signal, BAS216.	9340 255 30115
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS216.	9340 255 30115
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS216.	9340 255 30115
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS216.	9340 255 30115
6830	Diode, Signal, BAS216.	9340 255 30115
6831	Diode, Signal, BAS216.	9340 255 30115
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS216.	9340 255 30115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS216.	9340 255 30115
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS216.	9340 255 30115
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS216.	9340 255 30115
6913	Diode, Signal, BAS216.	9340 255 30115
6914	Diode, Signal, BAS216.	9340 255 30115
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360

S = Safety Part Be sure to use exact replacement part.

7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

ACS Manual Assembly

1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

2500 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2501 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2502 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2505 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2506 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2507 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2509 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2510 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2511 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2519 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2520 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2521 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2529 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2601 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2602 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2607 Cap, 47n, 10%, 25V, Ceramic. 3198 023 04730
2615 Cap, 100n, 5%, 16V, Polypropylene. . 2020 319 90005
2616 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2617 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2618 Cap, 2u2, +80/-20%, 10V, Ceramic . . 3198 017 22250
2619 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2620 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2621 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2626 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2627 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2628 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2630 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2631 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2632 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2633 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2634 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2635 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2636 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2637 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2638 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2639 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2644 Cap, 100p, 5%, 50V, Ceramic. 3198 016 01010
2700 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2701 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2702 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2704 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2710 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2711 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2714 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2720 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2721 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2724 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2731 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2740 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2741 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2750 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2800 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2802 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2804 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2806 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2807 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2809 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2810 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2811 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2812 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2813 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2814 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2815 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2816 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2901 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2902 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2903 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2904 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2905 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2906 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2909 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2910 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2911 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2912 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2913 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2922 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2923 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2924 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2931 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2933 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2944 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2945 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2951 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2952 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2953 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2957 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2958 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2961 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2963 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2968 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
3150 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3151 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3160 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3161 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3170 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3171 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3180 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3181 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3185 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3186 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3247 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3248 Res, 470K, 5%, 1/10W, Metalized Glass 3198 021 54740
3251 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3261 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3271 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3281 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3286 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3320 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3321 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3323 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3324 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3325 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3326 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3331 Res, 1M, 5%, 1/10W, Metalized Glass. 3198 021 51050
3332 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3333 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3335 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3336 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3339 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3410 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3411 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3412 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3413 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3414 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3415 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3416 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3418 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3419 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3420 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3421 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3422 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3424 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3425 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710
3426 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3427 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3428 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3429 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3430 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3431 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3432 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3433 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3434 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3435 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3436 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3438 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3439 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3441 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3442 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3443 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3444 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3445 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687

S = Safety Part Be sure to use exact replacement part.

43PP9202/17F (continued)

6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP9202/84 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Backcover, Upper, 43	3135 034 00311	
AC03	Customer Controls.	3135 017 07622	
AC04	Backcover, Lower, 43	3135 034 00652	
AC05	Cabinet Assembly NAFTA 43.	3135 037 50603	
AC06	Frame, Chassis	3135 034 00605	
AC07	Rear Light Barrier, 43	3135 013 03732	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Cabinet, Front	3135 037 50991	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Fresnel Lens 43.	3135 014 10311	
AC15	Lenticular Screen. 43.	3135 033 20141	
AC16	Protector, Screen, 43.	3135 034 00521	
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50681	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror Mounting, 43	3135 011 04611	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, HORZ 43.	3135 034 00821	
AC29	Retainer, Screen, VERT 43.	3135 034 00831	
AC30	Grill Assembly, 43V.	3135 037 50661	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00771	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
S DEFL	Deflection Yoke DAV4362M (Green)	2422 549 45211	
S DEFL	Deflection Yoke DAV4363M (Red & Blue)	2422 549 45212	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta, 240	3135 037 50701	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	
X9	Coupler, 43 Red & Blue (Part of CRT Asm.)	3135 011 04473	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

H.O.P. Panel Parts

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310

S = Safety Part Be sure to use exact replacement part.

43PP9202/84 (continued)

3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP920201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Backcover, Upper, 43	3135 034 00311	
AC03	Customer Controls.	3135 017 07622	
AC04	Backcover, Lower, 43	3135 034 00652	
AC05	Cabinet Assembly NAFTA 43.	3135 037 50603	
AC06	Frame, Chassis	3135 034 00605	
AC07	Rear Light Barrier, 43	3135 013 03732	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Cabinet, Front	3135 037 50991	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Fresnel Lens 43.	3135 014 10311	
AC15	Lenticular Screen. 43.	3135 033 20141	
AC16	Protector, Screen, 43.	3135 034 00521	
AC18	Mirror, 2 Surface, 43 HDR.	3135 034 90011	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50681	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror Mounting, 43	3135 011 04611	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, HORZ 43.	3135 034 00821	
AC29	Retainer, Screen, VERT 43.	3135 034 00831	
AC30	Grill Assembly, 43V.	3135 037 50661	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00771	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
S DEFL	Deflection Yoke DAV4362M (Green)	2422 549 45211	
S DEFL	Deflection Yoke DAV4363M (Red & Blue)	2422 549 45212	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta, 240	3135 037 50701	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	
X9	Coupler, 43 Red & Blue (Part of CRT Asm.)	3135 011 04473	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730		6819	Zener Diode, 18 volt	3198 010 21890	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020		6820	Zener Diode, 10 volt	9340 386 80115	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240		6821	Diode, Signal, BAS316.	3198 010 10630	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225		6822	Diode, Rect, BYV95C	9335 001 80133	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		6823	Diode, Signal, BAS316.	3198 010 10630	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		6824	Zener Diode, 10 volt	9340 386 80115	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010		6825	Zener Diode, 10 volt	9340 386 80115	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020		6826	Zener Diode, 18 volt	3198 010 21890	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830		6827	Diode, Rect, BYV27-200.	9335 526 80133	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090		6828	Zener Diode, 10 volt	9340 386 80115	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720		6829	Diode, Signal, BAS316.	3198 010 10630	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225		6830	Diode, Signal, BAS316.	3198 010 10630	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090		6831	Diode, Signal, BAS316.	3198 010 10630	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780		6832	Zener Diode, 15 volt	9340 387 20115	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040		6901	Diode, Signal, BAS316.	3198 010 10630	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		6902	Zener Diode, 18 volt	3198 010 21890	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		6903	Zener Diode, 4.7 volt.	3198 010 24780	
S 5300	Transformer, US54107-00.	2422 531 02507		6904	Diode, Signal, BAS316.	3198 010 10630	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6905	Zener Diode, 3.9 volt.	3198 010 23980	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6906	Zener Diode, 8.2 volt.	3198 010 28280	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6908	Diode, Signal, BAS316.	3198 010 10630	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6909	Diode, Signal, 1N4148.	3198 010 10010	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6910	Diode, Signal, BAT85	9336 247 60133	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6912	Diode, Signal, BAS316.	3198 010 10630	
5307	Coil, 10u.	2422 535 95363		6913	Diode, Signal, BAS316.	3198 010 10630	
5308	Coil, 1u	2422 535 95387		6914	Diode, Signal, BAS316.	3198 010 10630	
5309	Coil, 10u.	2422 535 95363		6915	Diode, Rect, BYV27-600.	9340 418 70133	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6916	Diode, Rect, BYV27-600.	9340 418 70133	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6917	Diode, Rect, BYV27-400.	9340 366 90133	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		6919	Diode, Signal, BAT254.	9340 393 00115	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7300	Transistor, NPN, BC547B.	3198 020 40030	
5314	Coil, 10u.	2422 535 95363		7301	Transistor, FET, STW13NB60	9322 121 46687	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7302	IC, MC44603AP.	9322 108 36682	
5316	Coil, 10u.	2422 535 95363		7303	Optic Coupler, CQY80NG	9338 941 50682	
5317	Coil, 10u.	2422 535 95363		7304	IC, TL431BCLP.	9322 115 98676	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7305	IC, TL431BCLP.	9322 115 98676	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7309	Transistor, NPN, BC547B.	3198 020 40030	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7801	Transistor, NPN, BU2520AF.	9340 153 80127	
5321	Coil, 1u	2422 535 95387		7802	Transistor, FET, 2SK2232	9322 135 90687	
5322	Coil, 10u.	2422 535 95363		7803	IC, LM393D	9339 849 10668	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7807	F.E.T. Signal, BSN304.	9340 235 30126	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7808	Transistor, NPN, BC847B.	3198 010 42030	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041		7809	Transistor, NPN, BC847B.	3198 010 42030	
5336	Coil, 10u.	2422 535 95363		7810	Transistor, NPN, BC847B.	3198 010 42030	
5801	Transformer, US40104-01.	2422 531 02512		7811	IC, TDA8177.	9322 066 43687	
5802	Coil, 47u.	2422 535 95282		7812	Transistor, PNP, BF423	9332 593 60126	
5803	Coil, 2u2.	2422 535 91014		7813	Transistor, NPN, BC847B.	3198 010 42030	
5804	Coil, 5u1.	2422 549 45206		7814	Transistor, PNP, BC857B.	3198 010 42150	
5805	Coil, 90u.	2422 536 00272		7901	Transistor, NPN, BF487	9337 626 60112	
5807	Coil, 1m5.	2422 535 95723		7902	Transistor, NPN, BC847B.	3198 010 42030	
5808	Transformer, Signal Driver, UD151.	2422 531 02515		7903	Transistor, PNP, BC327-25.	3198 020 43430	
5809	Coil, 47u.	3198 018 24790		7904	Transistor, NPN, BC847B.	3198 010 42030	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		7905	Transistor, PNP, BC857B.	3198 010 42150	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010		7906	Transistor, NPN, BC847B.	3198 010 42030	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434		9000	Wire Jumper, 0.58MM.	3198 036 90010	
5902	Coil, 47u.	2422 535 95282		9106	Wire Jumper, 0.58MM.	3198 036 90010	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020		9109	Wire Jumper, 0.58MM.	3198 036 90010	
5904	High Voltage Generator, PTV.	3122 268 32865		9110	Wire Jumper, 0.58MM.	3198 036 90010	
6301	Diode, Rect, BYV95C	9335 001 80133		9138	Wire Jumper, 0.58MM.	3198 036 90010	
6302	Diode, Rect, 1N5062	9330 764 50133		9139	Wire Jumper, 0.58MM.	3198 036 90010	
6303	Diode, Rect, 1N5062	9330 764 50133		9140	Wire Jumper, 0.58MM.	3198 036 90010	
6304	Diode, Rect, BY229X-600	9340 380 20127		9141	Wire Jumper, 0.58MM.	3198 036 90010	
6306	Diode, Rect, BY229X-600	9340 380 20127		9142	Wire Jumper, 0.58MM.	3198 036 90010	
6307	Diode, Rect, BY229X-600	9340 380 20127		9143	Wire Jumper, 0.58MM.	3198 036 90010	
6308	Diode, Rect, BY229X-600	9340 380 20127		9146	Wire Jumper, 0.58MM.	3198 036 90010	
6309	Diode, Rect, BY229X-600	9340 380 20127		9149	Wire Jumper, 0.58MM.	3198 036 90010	
6310	Diode, Rect, BYD33D	9337 234 00133		9153	Wire Jumper, 0.58MM.	3198 036 90010	
6313	Diode, Signal, 1N4148.	9330 839 90133		9156	Wire Jumper, 0.58MM.	3198 036 90010	
6314	Diode, Rect, BY229X-600	9340 380 20127		9158	Wire Jumper, 0.58MM.	3198 036 90010	
6316	Diode, Rect, BY229X-600	9340 380 20127		9161	Wire Jumper, 0.58MM.	3198 036 90010	
6317	Diode, Rect, BY229X-600	9340 380 20127		9162	Wire Jumper, 0.58MM.	3198 036 90010	
6318	Diode, Rect, BYV95C	9335 001 80133		9165	Wire Jumper, 0.58MM.	3198 036 90010	
6320	Diode, Signal, 1N4148.	9330 839 90133		9166	Wire Jumper, 0.58MM.	3198 036 90010	
6321	Diode, Signal, 1N4148.	9330 839 90133		9167	Wire Jumper, 0.58MM.	3198 036 90010	
6801	Diode, Rect, BY229X-200	9340 380 00127		9168	Wire Jumper, 0.58MM.	3198 036 90010	
6802	Diode, Rect, BYV95C	9335 001 80133		9169	Wire Jumper, 0.58MM.	3198 036 90010	
6803	Diode, Rect, BY229X-200	9340 380 00127		9170	Wire Jumper, 0.58MM.	3198 036 90010	
6804	Zener Diode, 4.7 volt.	3198 010 24780		9171	Wire Jumper, 0.58MM.	3198 036 90010	
6805	Diode, Rect, BYV27-200.	9335 526 80133		9172	Wire Jumper, 0.58MM.	3198 036 90010	
6806	Diode, Rect, BYV27-200.	9335 526 80133		9173	Wire Jumper, 0.58MM.	3198 036 90010	
6807	Diode, Signal, BAS316.	3198 010 10630		9176	Wire Jumper, 0.58MM.	3198 036 90010	
6808	Diode, Signal, BAS316.	3198 010 10630		9177	Wire Jumper, 0.58MM.	3198 036 90010	
6809	Diode, Rect, BYD33J	9337 234 20133		9178	Wire Jumper, 0.58MM.	3198 036 90010	
6810	Diode, Rect, BYM357DX	9340 560 29127		9179	Wire Jumper, 0.58MM.	3198 036 90010	
6811	Diode, Rect, BYV27-200.	9335 526 80133		9180	Wire Jumper, 0.58MM.	3198 036 90010	
6812	Zener Diode, 68 volt	3198 010 26890		9181	Wire Jumper, 0.58MM.	3198 036 90010	
6813	Zener Diode, 10 volt	9340 386 80115		9187	Wire Jumper, 0.58MM.	3198 036 90010	
6814	Zener Diode, 10 volt	9340 386 80115		9188	Wire Jumper, 0.58MM.	3198 036 90010	
6815	Diode, Signal, BAS316.	3198 010 10630		9189	Wire Jumper, 0.58MM.	3198 036 90010	
6816	Zener Diode, 68 volt	3198 010 26890		9190	Wire Jumper, 0.58MM.	3198 036 90010	
6817	Diode, Signal, BAS316.	3198 010 10630		9191	Wire Jumper, 0.58MM.	3198 036 90010	
6818	Diode, Signal, BAS316.	3198 010 10630		9193	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

7710	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9147	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

H.O.P. Panel Parts

1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310

S = Safety Part Be sure to use exact replacement part.

43PP920201 (continued)

3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

43PP920284F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Model 43PP9202/84F Cabinet Parts

AC18	Mirror, 2 Surface, 43V HDR	3135 034 90011

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

Rear Switch Panel Parts

Rear Switch Panel Parts

Model 43PP9202/84F Cabinet Parts

		Model 43PP9202/84F Cabinet Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Cover, Back.	3135 034 00313
	AC03	Keyboard Assembly.	3135 037 10551
	AC04	Back, Lower, 43.	3135 034 00652
	AC07	Barrier, Rear, 43V	3135 013 03732
	AC09	Assembly, Front, Cabinet	3135 037 51851
	AC13	Lens, IR Receiver.	3135 034 00861
	AC14	Lens, Fresnel, 43V	3135 033 20171
	AC15	Screen, Lenticular, 43V.	3135 033 20141
	AC16	Screen, Protector, 43V.	3135 034 00521
	AC18	Mirror, 2 Surface, 43V HDR	3135 034 90011
	AC22	Bracket, Side Jack Panel	3135 037 50681
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror, Mounting.	3135 011 04612
	AC28	Retainer, Screen, Horiz 43V.	3135 034 01931
	AC29	Retainer, Screen Vertical 43V.	3135 034 01941
	AC30	Assembly, Baffle, 43V.	3135 037 50661
	AC31	Nameplate.	3135 015 02511
	AC32	Bracket, Focus-G2 Control (Not Shown)	3135 034 00772
	AC34	Owner's Manual (English).	3135 035 20391
	AC34	Owner's Manual (Spanish)	3135 035 21461
	AC35	Quick Use Guide, (English) (Not Shown	3135 035 20401
	AC35	Quick Use Guide (Spanish).	3135 035 21451
	AC38	Cup, Baffle Mounting (3 Used)	3135 013 02761
S	DEFL	Deflection Yoke, BY01716	2422 549 45593
S	FG2	Focus Control, 100M, 15KV.	2422 549 45511
	REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
	X1	Screw, 8-32X0.5 Torx (4 used).	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X12	Bracket, CRT, Spring	3135 011 02371
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT P16LTG00BMB(U), Blue	9322 173 23682
S	X15	CRT P16LTG00RFA(U), Red.	9322 173 22682
	X16	Pad, CRT (Not Shown) (4 Used).	3135 014 02811
	X2	Lens, Delta 240.	3135 037 50701
	X3	Lens, C-Element, Green	3135 034 00731
	X3	Lens, C-Element, Clear	3135 034 00721
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 034 02561
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 034 02551
	X9	Coupler, CRT, Green (Part of CRT Assembly).	3135 011 04282
	X9	Coupler, CRT, Red & Blue (Part of CRT Assembly).	3135 011 04474

Cabinet & Accessory Parts

Cabinet & Accessory Parts

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0382	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	
9195	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

SSM Panel Parts

0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

7007	Transistor, NPN, BC817-25.	3198 010 43230	9133	Wire Jumper, 0.58MM.	3198 036 90010
7016	Transistor, NPN, BC847B.	3198 010 42030	9134	Wire Jumper, 0.58MM.	3198 036 90010
7017	IC, CXA2089S	9322 162 27682	9135	Wire Jumper, 0.58MM.	3198 036 90010
7025	Transistor, NPN, BC847B.	3198 010 42030	9136	Wire Jumper, 0.58MM.	3198 036 90010
7026	Transistor, NPN, BC847B.	3198 010 42030	9137	Wire Jumper, 0.58MM.	3198 036 90010
7044	IC, STK392-120	9322 123 44682	9138	Wire Jumper, 0.58MM.	3198 036 90010
7045	IC, STK392-120	9322 123 44682	9139	Wire Jumper, 0.58MM.	3198 036 90010
7101	IC, L7912CV.	9337 107 20682	9140	Wire Jumper, 0.58MM.	3198 036 90010
7102	IC, L7908CV.	9322 069 79682	9141	Wire Jumper, 0.58MM.	3198 036 90010
7103	IC, L7912CV.	9335 040 20682	9142	Wire Jumper, 0.58MM.	3198 036 90010
7105	IC, L7912CV.	9335 202 90682	9143	Wire Jumper, 0.58MM.	3198 036 90010
7106	IC, LM317T	9337 220 80682	9144	Wire Jumper, 0.58MM.	3198 036 90010
7208	Transistor, NPN, BC847B.	3198 010 42030	9145	Wire Jumper, 0.58MM.	3198 036 90010
7403	IC, TDA1308T/N1.	9350 721 10115	9146	Wire Jumper, 0.58MM.	3198 036 90010
7700	IC, TDA7490.	9322 147 50667	9148	Wire Jumper, 0.58MM.	3198 036 90010
7701	Transistor, NPN, BC847B.	3198 010 42030	9149	Wire Jumper, 0.58MM.	3198 036 90010
7704	Transistor, NPN, BC847B.	3198 010 42030	9150	Wire Jumper, 0.58MM.	3198 036 90010
7705	Transistor, NPN, BC847B.	3198 010 42030	9151	Wire Jumper, 0.58MM.	3198 036 90010
7706	Transistor, PNP, BC857B.	3198 010 42150	9152	Wire Jumper, 0.58MM.	3198 036 90010
7707	Transistor, NPN, BC847B.	3198 010 42030	9153	Wire Jumper, 0.58MM.	3198 036 90010
7708	Transistor, PNP, BC857B.	3198 010 42150	9154	Wire Jumper, 0.58MM.	3198 036 90010
7710	Transistor, NPN, BC847B.	3198 010 42030	9155	Wire Jumper, 0.58MM.	3198 036 90010
7800	Transistor, NPN, BC847B.	3198 010 42030	9156	Wire Jumper, 0.58MM.	3198 036 90010
7801	Transistor, PNP, BC857B.	3198 010 42150	9157	Wire Jumper, 0.58MM.	3198 036 90010
7802	Transistor, NPN, BC847B.	3198 010 42030	9158	Wire Jumper, 0.58MM.	3198 036 90010
7803	Transistor, PNP, BC857B.	3198 010 42150	9159	Wire Jumper, 0.58MM.	3198 036 90010
7804	Transistor, NPN, BC847B.	3198 010 42030	9160	Wire Jumper, 0.58MM.	3198 036 90010
7805	Transistor, PNP, BC857B.	3198 010 42150	9161	Wire Jumper, 0.58MM.	3198 036 90010
7806	Transistor, NPN, BC847B.	3198 010 42030	9162	Wire Jumper, 0.58MM.	3198 036 90010
7808	Transistor, NPN, BC847B.	3198 010 42030	9163	Wire Jumper, 0.58MM.	3198 036 90010
7809	Transistor, PNP, BC857B.	3198 010 42150	9164	Wire Jumper, 0.58MM.	3198 036 90010
7810	Transistor, NPN, BC847B.	3198 010 42030	9165	Wire Jumper, 0.58MM.	3198 036 90010
7811	Transistor, PNP, BC857B.	3198 010 42150	9166	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9177	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9187	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9189	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9202	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9205	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

43PP920284F (continued)

3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC04	Back, Lower.	3135 033 00131	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC14	Fresnel, Lens, 46W	3135 014 08461	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC30	Baffle, Assembly, 46W.	3135 037 50371	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +/-) . . .	3135 037 10811

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP9302/17 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930201 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC04	Back, Lower.	3135 033 00131	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC14	Fresnel, Lens, 46W	3135 014 08461	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC30	Baffle, Assembly, 46W.	3135 037 50371	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

6028	Diode, Signal, BAV99	9332 153 70215		9123	Wire Jumper, 0.58MM.	3198 036 90010	
6029	Diode, Signal, BAV99	9332 153 70215		9124	Wire Jumper, 0.58MM.	3198 036 90010	
6034	Zener Diode, 33 volt	9340 388 00115		9125	Wire Jumper, 0.58MM.	3198 036 90010	
6036	Zener Diode, 4.7 volt.	3198 020 54780		9126	Wire Jumper, 0.58MM.	3198 036 90010	
6052	Diode, Signal, BAS316.	3198 010 10630		9127	Wire Jumper, 0.58MM.	3198 036 90010	
6053	Diode, Signal, BAS316.	3198 010 10630		9128	Wire Jumper, 0.58MM.	3198 036 90010	
6701	Thyristor, BT169B.	9338 268 50126		9129	Wire Jumper, 0.58MM.	3198 036 90010	
6702	Diode, Rect, S1D.	9322 128 69685		9130	Wire Jumper, 0.58MM.	3198 036 90010	
7002	Transistor, NPN, BC847B.	3198 010 42030		9131	Wire Jumper, 0.58MM.	3198 036 90010	
7003	Transistor, NPN, BC847B.	3198 010 42030		9132	Wire Jumper, 0.58MM.	3198 036 90010	
7005	Transistor, NPN, BC817-25.	3198 010 43230		9133	Wire Jumper, 0.58MM.	3198 036 90010	
7007	Transistor, NPN, BC817-25.	3198 010 43230		9134	Wire Jumper, 0.58MM.	3198 036 90010	
7016	Transistor, NPN, BC847B.	3198 010 42030		9135	Wire Jumper, 0.58MM.	3198 036 90010	
7017	IC, CXA2089S	9322 162 27682		9136	Wire Jumper, 0.58MM.	3198 036 90010	
7044	IC, STK392-120	9322 123 44682		9137	Wire Jumper, 0.58MM.	3198 036 90010	
7045	IC, STK392-120	9322 123 44682		9138	Wire Jumper, 0.58MM.	3198 036 90010	
7101	IC, L7912CV.	9337 107 20682		9139	Wire Jumper, 0.58MM.	3198 036 90010	
7102	IC, L7908CV.	9322 069 79682		9140	Wire Jumper, 0.58MM.	3198 036 90010	
7103	IC, L7912CV.	9335 040 20682		9141	Wire Jumper, 0.58MM.	3198 036 90010	
7105	IC, L7912CV.	9335 202 90682		9142	Wire Jumper, 0.58MM.	3198 036 90010	
7106	IC, LM317T	9337 220 80682		9143	Wire Jumper, 0.58MM.	3198 036 90010	
7208	Transistor, NPN, BC847B.	3198 010 42030		9144	Wire Jumper, 0.58MM.	3198 036 90010	
7403	IC, TDA1308T/N1.	9350 721 10115		9145	Wire Jumper, 0.58MM.	3198 036 90010	
7700	IC, TDA7490.	9322 147 50667		9146	Wire Jumper, 0.58MM.	3198 036 90010	
7701	Transistor, NPN, BC847B.	3198 010 42030		9147	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7711	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +/-) . . .	3135 037 10811

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930201 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930217F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC03	Customer Control Panel	3135 037 51412	
AC06	Frame, Chassis	3135 034 00606	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror, Lower	3135 034 02451	
AC11	Frame, PIP	3135 014 11101	
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811	
AC13	Lens, IR, Receiver	3135 034 00861	
AC14	Fresnel Lens, 46W, Pre-Lubed	3135 033 20181	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC29	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC30	Baffle, 46W.	3135 037 51641	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC50	Quick Use Guide, 46PP9302 HDTV Monito	3135 035 20751	
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509	
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511	
REMOTE	Transmitter, RC2061/01	3128 147 14611	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler. 50V, 46W (Red & Blue).	3135 011 03635	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6816	Zener Diode, 68 volt	3198 010 26890	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6832	Zener Diode, 15 volt	9340 387 20115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	
9195	Wire Jumper, 0.58MM.	3198 036 90010	
9198	Wire Jumper, 0.58MM.	3198 036 90010	
9302	Wire Jumper, 0.58MM.	3198 036 90010	
9303	Wire Jumper, 0.58MM.	3198 036 90010	
9304	Wire Jumper, 0.58MM.	3198 036 90010	
9307	Wire Jumper, 0.58MM.	3198 036 90010	
9308	Wire Jumper, 0.58MM.	3198 036 90010	
9309	Wire Jumper, 0.58MM.	3198 036 90010	
9804	Wire Jumper, 0.58MM.	3198 036 90010	
9805	Wire Jumper, 0.58MM.	3198 036 90010	
9807	Wire Jumper, 0.58MM.	3198 036 90010	
9808	Wire Jumper, 0.58MM.	3198 036 90010	
9809	Wire Jumper, 0.58MM.	3198 036 90010	
9811	Wire Jumper, 0.58MM.	3198 036 90010	
9813	Wire Jumper, 0.58MM.	3198 036 90010	
9814	Wire Jumper, 0.58MM.	3198 036 90010	
9815	Wire Jumper, 0.58MM.	3198 036 90010	
9816	Wire Jumper, 0.58MM.	3198 036 90010	
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991	

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

0002	Insulator.	3135 033 10011	2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
0003	Clip, Transistor	3135 011 02681	2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0011	Spring, Clip, Horiz.	3135 011 04572	2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
0012	Spring, Clip, Horiz.	3135 011 04572	2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
0045	Heatsink, Folded	3135 011 04555	2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0101	Heatsink, TO-220	3135 011 03291	2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0102	Heatsink, TO-220	3135 011 03291	2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
0103	Heatsink, TO-220	3135 011 03291	2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0105	Heatsink, TO-220	3135 011 03291	2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0106	Heatsink, TO-220	3135 011 03291	2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1000	Connector, 15 Pin.	2422 025 16976	2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1001	Connector, 15 Pin.	2422 025 16976	2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1002	Connector, 1 Pin	2422 015 18552	2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1003	Connector, 1 Pin	2422 015 18552	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1005	Connector, 4 Pin	2422 025 10647	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1006	Connector, 4 Pin	2422 025 10647	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1007	Connector, 4 Pin	2422 025 10647	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1008	Connector, 9 Pin	2422 025 16049	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1009	Connector, 9 Pin	2422 025 16049	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1010	Connector, 1 Pin	2422 015 18552	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1014	Connector, 7 Pin	2422 025 11244	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1020	Connector, SIMM, 80 Pin.	2422 025 17242	2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1021	Socket, Cinch, 2 Pin	2422 026 05293	2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1024	Socket, Cinch, 12 Pin.	2422 026 05064	2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
1025	Socket, MDIN, 10 Pin	2422 026 04926	2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1026	Socket, MDIN, 10 Pin	2422 026 04926	2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1027	Socket, Cinch, 2 Pin	2422 026 05294	2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1028	Connector, 3 Pin	2422 025 09191	2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1030	Connector, 3 Pin	2422 025 11117	2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
1043	Connector, 10 Pin.	2422 025 16587	2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
1102	Connector, 12 Pin.	2422 025 08333	2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
1106	Tuner, V+U, PLL	2422 542 90108	2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1201	Connector, 10 Pin.	2422 025 12484	2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
1222	Connector, 5 Pin	2422 025 12481	2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1250	Connector, 9 Pin	2422 025 16049	2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1272	Connector, 3 Pin	2412 020 00725	2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1302	Connector, 2 Pin	2422 025 09405	2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1303	Connector, 5 Pin	2422 025 10428	2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
1335	Connector, 10 Pin.	2422 025 12484	2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1344	Connector, 3 Pin	2412 020 00725	2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
1349	Connector, 5 Pin	2422 025 15832	2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1410	Cable, 1 Pin, 70mm	3135 031 00531	2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
1411	Cable, 1 Pin, 240mm.	3135 031 00521	2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1412	Cable, 1 Pin, 130mm.	3135 031 00601	2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
1516	Connector, 12 Pin.	2422 025 08333	2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1518	Connector, 12 Pin.	2422 025 08333	2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1610	Connector, 5 Pin	2422 025 12481	2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1681	Connector, 3 Pin	2422 025 10768	2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1702	Thyristor, BT169B.	9338 268 50126	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1950	Connector, 9 Pin	2422 025 16049	2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

7025	Transistor, NPN, BC847B.	3198 010 42030		9136	Wire Jumper, 0.58MM.	3198 036 90010	
7026	Transistor, NPN, BC847B.	3198 010 42030		9137	Wire Jumper, 0.58MM.	3198 036 90010	
7044	IC, STK392-120	9322 123 44682		9138	Wire Jumper, 0.58MM.	3198 036 90010	
7045	IC, STK392-120	9322 123 44682		9139	Wire Jumper, 0.58MM.	3198 036 90010	
7101	IC, L7912CV.	9337 107 20682		9140	Wire Jumper, 0.58MM.	3198 036 90010	
7102	IC, L7908CV.	9322 069 79682		9141	Wire Jumper, 0.58MM.	3198 036 90010	
7103	IC, L7912CV.	9335 040 20682		9142	Wire Jumper, 0.58MM.	3198 036 90010	
7105	IC, L7912CV.	9335 202 90682		9143	Wire Jumper, 0.58MM.	3198 036 90010	
7106	IC, LM317T	9337 220 80682		9144	Wire Jumper, 0.58MM.	3198 036 90010	
7208	Transistor, NPN, BC847B.	3198 010 42030		9145	Wire Jumper, 0.58MM.	3198 036 90010	
7403	IC, TDA1308T/N1.	9350 721 10115		9146	Wire Jumper, 0.58MM.	3198 036 90010	
7700	IC, TDA7490.	9322 147 50667		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7701	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11221

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic W)	3104 328 25631

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP930217F (continued)

6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930284 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back, Upper, 46W.	3135 034 00321	
AC04	Back, Lower.	3135 033 00131	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear, 46W	3135 033 00251	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen, 46W	3135 037 50871	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC14	Fresnel, Lens, 46W	3135 014 08461	
AC15	Lenticular, Screen, 46W.	3135 033 20061	
AC16	Protector, Screen, 46W	3135 034 01321	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC27	Overlay, Rear Jack	3135 030 00081	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vertical, 46W	3135 034 01271	
AC30	Baffle, Assembly, 46W.	3135 037 50371	
AC31	Wordmark, Philips, Dark Silver	3111 250 00301	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mylar Mirror, 46W	3135 031 20071	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +/-) . . .	3135 037 10811

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

46PP930284 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP930284F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Model 46PP9302/84F Cabinet Parts

	Model 46PP9302/84F Cabinet Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper, 46W	3135 034 00321
AC04	Backcover, Lower	3135 033 00931
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack Panel	3135 034 02421
AC09	Frame, Screen, 46W	3135 037 50871
AC10	Bracket, Mirror Lower.	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20181
AC15	Lenticular, Screen, 46W.	3135 033 20061
AC16	Protector, Screen, 46W	3135 034 01321
AC17	Barrier, Light	3135 034 00891
AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W (2 Used).	2422 264 00455
AC25B	Bracket, Speaker 4X6 (Not Shown)	3135 034 02401
AC26	Bracket, Mirror Support.	3135 011 03005
AC27	Overlay, Rear Jack	3135 030 00081
AC28	Retainer, Screen, Horiz, 50V-46W (2 Used)	3135 034 01221
AC29	Retainer, Screen, Vertical, 46W (2 Used)	3135 034 01271
AC30	Baffle, 46W.	3135 037 51641
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20741
AC34	Owner's Manual, Spanish.	3135 035 21481
AC35	Quick Use Guide.	3135 035 20751
AC35	Quick Use Guide, Spanish	3135 035 21471
AC36	Bracket, Chassis Holdown	3135 011 02011
AC38	Cup, Baffle Mounting	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror Mylar.	3135 031 20071
S DEFL	Yoke, Deflection, BY01715.	2422 549 45509
S FG2	Focuspot, 100M, 15KV HSB222	2422 549 45511
REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
X1	Screw, 8-32X0.5 Torx (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown) (4 Used).	3135 014 02811
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Green	3135 034 00731
X3	Lens, C-Element, Clear	3135 034 00721
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 034 02561
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 034 02551
X9	Coupler, 50V, 46W.	3135 011 03635
X9	Coupler, Green	3135 011 04282

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6816	Zener Diode, 68 volt	3198 010 26890	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6832	Zener Diode, 15 volt	9340 387 20115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	
9193	Wire Jumper, 0.58MM.	3198 036 90010	
9195	Wire Jumper, 0.58MM.	3198 036 90010	
9198	Wire Jumper, 0.58MM.	3198 036 90010	
9302	Wire Jumper, 0.58MM.	3198 036 90010	
9303	Wire Jumper, 0.58MM.	3198 036 90010	
9304	Wire Jumper, 0.58MM.	3198 036 90010	
9307	Wire Jumper, 0.58MM.	3198 036 90010	
9308	Wire Jumper, 0.58MM.	3198 036 90010	
9309	Wire Jumper, 0.58MM.	3198 036 90010	
9804	Wire Jumper, 0.58MM.	3198 036 90010	
9805	Wire Jumper, 0.58MM.	3198 036 90010	
9807	Wire Jumper, 0.58MM.	3198 036 90010	
9808	Wire Jumper, 0.58MM.	3198 036 90010	
9809	Wire Jumper, 0.58MM.	3198 036 90010	
9811	Wire Jumper, 0.58MM.	3198 036 90010	
9813	Wire Jumper, 0.58MM.	3198 036 90010	
9814	Wire Jumper, 0.58MM.	3198 036 90010	
9815	Wire Jumper, 0.58MM.	3198 036 90010	
9816	Wire Jumper, 0.58MM.	3198 036 90010	
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991	

SSM Panel Parts

SSM Panel Parts

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

0001	Heatsink	3135 031 60071	2060	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
0002	Insulator	3135 033 10011	2061	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
0003	Clip, Transistor	3135 011 02681	2062	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0011	Spring, Clip, Horiz	3135 011 04572	2063	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0012	Spring, Clip, Horiz	3135 011 04572	2066	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0045	Heatsink, Folded	3135 011 04555	2067	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
0101	Heatsink, TO-220	3135 011 03291	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0102	Heatsink, TO-220	3135 011 03291	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0103	Heatsink, TO-220	3135 011 03291	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0105	Heatsink, TO-220	3135 011 03291	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
0106	Heatsink, TO-220	3135 011 03291	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1000	Connector, 15 Pin	2422 025 16976	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1001	Connector, 15 Pin	2422 025 16976	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1002	Connector, 1 Pin	2422 015 18552	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1003	Connector, 1 Pin	2422 015 18552	2076	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1005	Connector, 4 Pin	2422 025 10647	2077	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1006	Connector, 4 Pin	2422 025 10647	2078	Cap, 100u, 20%, 25V, Electrolytic	3198 025 31010
1007	Connector, 4 Pin	2422 025 10647	2079	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1010	Connector, 1 Pin	2422 015 18552	2081	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
1014	Connector, 7 Pin	2422 025 11244	2083	Cap, 220u, 20%, 16V, Electrolytic	3198 025 22210
1020	Connector, SIMM, 80 Pin	2422 025 17242	2084	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
1021	Socket, Cinch, 2 Pin	2422 026 05293	2085	Cap, 47n, +80/-20%, 50V, Ceramic	3198 017 24730
1024	Socket, Cinch, 12 Pin	2422 026 05064	2086	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1025	Socket, MDIN, 10 Pin	2422 026 04926	2087	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1026	Socket, MDIN, 10 Pin	2422 026 04926	2088	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
1028	Connector, 3 Pin	2422 025 09191	2089	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1030	Connector, 3 Pin	2422 025 11117	2090	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1043	Connector, 10 Pin	2422 025 16587	2091	Cap, 470n, +80/-20%, 16V, Ceramic	3198 017 24740
1102	Connector, 12 Pin	2422 025 08333	2092	Cap, 470n, +80/-20%, 16V, Ceramic	3198 017 24740
1106	Tuner, V+U, PLL	2422 542 90108	2093	Cap, 470n, 10%, 50V, Polyester	3198 014 04740
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2094	Cap, 470n, +80/-20%, 16V, Ceramic	3198 017 24740
1201	Connector, 10 Pin	2422 025 12484	2095	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290
1222	Connector, 5 Pin	2422 025 12481	2096	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1250	Connector, 9 Pin	2422 025 16049	2097	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
1272	Connector, 3 Pin	2412 020 00725	2098	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1302	Connector, 2 Pin	2422 025 09405	2099	Cap, 2u2, +80/-20%, 10V, Ceramic	3198 017 22250
1335	Connector, 10 Pin	2422 025 12484	2102	Cap, 100n, +80/-20%, 50V, Ceramic	2020 552 95499
1344	Connector, 3 Pin	2412 020 00725	2103	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
1349	Connector, 5 Pin	2422 025 15832	2104	Cap, 100n, +80/-20%, 50V, Ceramic	2020 552 95499
1412	Cable, 1 Pin, 130mm	3135 031 00601	2105	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1516	Connector, 12 Pin	2422 025 08333	2106	Cap, 1u, 20%, 50V, Electrolytic	3198 028 51080
1518	Connector, 12 Pin	2422 025 08333	2107	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1610	Connector, 5 Pin	2422 025 12481	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1681	Connector, 3 Pin	2422 025 10768	2109	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC	2422 086 10783	2110	Cap, 47u, 20%, 16V, Electrolytic	3198 028 24790
S 1701	Fuse, 2 A, 250V IEC	2422 086 10783	2111	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1702	Thyristor, BT169B	9338 268 50126	2113	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
1950	Connector, 9 Pin	2422 025 16049	2115	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic	3198 025 71090	2130	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2001	Cap, 100n, +80/-20%, 50V, Ceramic	2020 552 95499	2131	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2002	Cap, 10u, 20%, 100V, Electrolytic	3198 025 71090	2132	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2003	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2133	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2004	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2134	Cap, 100n, +80/-20%, 50V, Ceramic	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2140	Cap, 100u, 20%, 25V, Electrolytic	3198 025 31010
2006	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2141	Cap, 100u, 20%, 25V, Electrolytic	3198 025 31010
2007	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2150	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2156	Cap, 1n, 5%, 50V, Ceramic	2020 552 93477
2010	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic	2020 552 95343
2011	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2012	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2013	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010
2016	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic	3198 017 06820
2017	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic	3198 017 06820
2018	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010
2019	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2020	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2021	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic	2020 552 95343
2022	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2701	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2702	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2025	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050	2703	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2704	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080	2705	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2029	Cap, 47n, +80/-20%, 50V, Ceramic	3198 017 24730	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2030	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic	3198 023 22240
2031	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010	2709	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2032	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2710	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2033	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2034	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2712	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814
2036	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2037	Cap, 100u, 20%, 50V, Electrolytic	2020 012 92656	2714	Cap, 33n, 10%, 50V, Ceramic	3198 017 03330
2039	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2041	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2716	Cap, 330p, 5%, 50V, Ceramic	3198 016 03310
2042	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2043	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	2719	Cap, 1n, 5%, 50V, Ceramic	3198 016 01020
2046	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2720	Cap, 220n, +80/-20%, 25V, Ceramic	3198 023 22240
2049	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040	2721	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2055	Cap, 1n, 5%, 50V, Ceramic	2020 552 93477	2722	Cap, 470p, 5%, 50V, Ceramic	3198 016 04710
2056	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2723	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814
2057	Cap, 150p, 5%, 50V, Ceramic	2020 552 94291	2724	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814
2059	Cap, 470u, 20%, 50V, Electrolytic	3198 026 54710	2725	Cap, 220n, +80/-20%, 50V, Ceramic	2238 580 19814

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic W)	3104 328 25631

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095

S = Safety Part Be sure to use exact replacement part.

1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290

46PP930284F (continued)

2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

46PP930284F (continued)

3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

46PP9302H17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Back, Upper, 46W.	3135 034 00321
	AC03	Customer Control Panel	3135 037 51412
	AC06	Frame, Chassis	3135 034 00606
	AC07	Barrier, Rear, 46W	3135 033 00251
	AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
	AC09	Frame, Screen, 46W	3135 037 50871
	AC10	Bracket, Mirror, Lower	3135 034 02451
	AC11	Frame, PIP	3135 014 11101
	AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
	AC13	Lens, IR, Receiver	3135 034 00861
	AC14	Fresnel Lens, 46W, Pre-Lubed	3135 033 20181
	AC15	Lenticular, Screen, 46W.	3135 033 20061
	AC16	Protector, Screen, 46W	3135 034 01321
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror Assembly, Mylar, 46W.	3135 037 51181
	AC21	Bracket, Module.	3135 034 00361
	AC22	Frame, Side Jack Panel	3135 037 50632
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror, Support	3135 011 03005
	AC27	Overlay, Rear Jack	3135 030 00081
	AC28	Retainer, Screen, Vertical, 46W	3135 034 01271
	AC29	Retainer, Screen, Horiz, 50V-46W	3135 034 01221
	AC30	Baffle, 46W.	3135 037 51641
	AC31	Wordmark, Philips, Dark Silver	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	DFU 46PP9302 HDTV Monitor.	3135 035 20741
	AC38	Baffle Mounting Cup.	3135 013 02761
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mylar Mirror, 46W	3135 031 20071
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, 46PP9302 HDTV Monito	3135 035 20751
S	DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X12	Bracket, CRT, Spring	3135 011 02371
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta 250.	3135 037 50711
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler. 50V, 46W (Red & Blue).	3135 011 03635
	X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

0002	Insulator.	3135 033 10011	2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
0003	Clip, Transistor	3135 011 02681	2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0011	Spring, Clip, Horiz.	3135 011 04572	2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
0012	Spring, Clip, Horiz.	3135 011 04572	2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
0045	Heatsink, Folded	3135 011 04555	2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0101	Heatsink, TO-220	3135 011 03291	2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0102	Heatsink, TO-220	3135 011 03291	2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
0103	Heatsink, TO-220	3135 011 03291	2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0105	Heatsink, TO-220	3135 011 03291	2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
0106	Heatsink, TO-220	3135 011 03291	2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1000	Connector, 15 Pin.	2422 025 16976	2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1001	Connector, 15 Pin.	2422 025 16976	2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1002	Connector, 1 Pin	2422 015 18552	2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1003	Connector, 1 Pin	2422 015 18552	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1005	Connector, 4 Pin	2422 025 10647	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1006	Connector, 4 Pin	2422 025 10647	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1007	Connector, 4 Pin	2422 025 10647	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1008	Connector, 9 Pin	2422 025 16049	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1009	Connector, 9 Pin	2422 025 16049	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1010	Connector, 1 Pin	2422 015 18552	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1014	Connector, 7 Pin	2422 025 11244	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
1020	Connector, SIMM, 80 Pin.	2422 025 17242	2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1021	Socket, Cinch, 2 Pin	2422 026 05293	2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1024	Socket, Cinch, 12 Pin.	2422 026 05064	2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
1025	Socket, MDIN, 10 Pin	2422 026 04926	2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1026	Socket, MDIN, 10 Pin	2422 026 04926	2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1027	Socket, Cinch, 2 Pin	2422 026 05294	2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1028	Connector, 3 Pin	2422 025 09191	2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
1030	Connector, 3 Pin	2422 025 11117	2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
1043	Connector, 10 Pin.	2422 025 16587	2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
1102	Connector, 12 Pin.	2422 025 08333	2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
1106	Tuner, V+U, PLL	2422 542 90108	2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1201	Connector, 10 Pin.	2422 025 12484	2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
1222	Connector, 5 Pin	2422 025 12481	2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1250	Connector, 9 Pin	2422 025 16049	2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1272	Connector, 3 Pin	2412 020 00725	2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1302	Connector, 2 Pin	2422 025 09405	2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1303	Connector, 5 Pin	2422 025 10428	2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
1335	Connector, 10 Pin.	2422 025 12484	2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1344	Connector, 3 Pin	2412 020 00725	2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
1349	Connector, 5 Pin	2422 025 15832	2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1410	Cable, 1 Pin, 70mm	3135 031 00531	2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
1411	Cable, 1 Pin, 240mm.	3135 031 00521	2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1412	Cable, 1 Pin, 130mm.	3135 031 00601	2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
1516	Connector, 12 Pin.	2422 025 08333	2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1518	Connector, 12 Pin.	2422 025 08333	2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1610	Connector, 5 Pin	2422 025 12481	2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1681	Connector, 3 Pin	2422 025 10768	2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1702	Thyristor, BT169B.	9338 268 50126	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1950	Connector, 9 Pin	2422 025 16049	2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

7025	Transistor, NPN, BC847B.	3198 010 42030		9136	Wire Jumper, 0.58MM.	3198 036 90010	
7026	Transistor, NPN, BC847B.	3198 010 42030		9137	Wire Jumper, 0.58MM.	3198 036 90010	
7044	IC, STK392-120	9322 123 44682		9138	Wire Jumper, 0.58MM.	3198 036 90010	
7045	IC, STK392-120	9322 123 44682		9139	Wire Jumper, 0.58MM.	3198 036 90010	
7101	IC, L7912CV.	9337 107 20682		9140	Wire Jumper, 0.58MM.	3198 036 90010	
7102	IC, L7908CV.	9322 069 79682		9141	Wire Jumper, 0.58MM.	3198 036 90010	
7103	IC, L7912CV.	9335 040 20682		9142	Wire Jumper, 0.58MM.	3198 036 90010	
7105	IC, L7912CV.	9335 202 90682		9143	Wire Jumper, 0.58MM.	3198 036 90010	
7106	IC, LM317T	9337 220 80682		9144	Wire Jumper, 0.58MM.	3198 036 90010	
7208	Transistor, NPN, BC847B.	3198 010 42030		9145	Wire Jumper, 0.58MM.	3198 036 90010	
7403	IC, TDA1308T/N1.	9350 721 10115		9146	Wire Jumper, 0.58MM.	3198 036 90010	
7700	IC, TDA7490.	9322 147 50667		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7701	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11221

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic W)	3104 328 25631

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

2502 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2505 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2506 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2507 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2509 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2510 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2511 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2519 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2520 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2521 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2529 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2601 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2602 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2607 Cap, 47n, 10%, 25V, Ceramic. 3198 023 04730
2615 Cap, 100n, 5%, 16V, Polypropylene. . 2020 319 90005
2616 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2617 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2618 Cap, 2u2, +80/-20%, 10V, Ceramic . . 3198 017 22250
2619 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2620 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2621 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2626 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2627 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2628 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2630 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2631 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2632 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2633 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2634 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2635 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2636 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2637 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2638 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2639 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2644 Cap, 100p, 5%, 50V, Ceramic. 3198 016 01010
2700 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2701 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2702 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2704 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2710 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2711 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2714 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2720 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2721 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2724 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2731 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2740 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2741 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2750 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2800 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2802 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2804 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2806 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2807 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2809 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2810 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2811 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2812 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2813 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2814 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2815 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2816 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2901 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2902 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2903 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2904 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2905 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2906 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2909 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2910 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2911 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2912 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2913 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2922 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2923 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2924 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2931 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2933 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2944 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2945 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2951 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2952 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2953 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2957 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2958 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2961 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2963 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2968 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
3150 Res, 75 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 57590
3151 Res, 47 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 54790
3160 Res, 75 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 57590
3161 Res, 47 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 54790
3170 Res, 75 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 57590
3171 Res, 47 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 54790
3180 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3181 Res, 220 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 52210
3185 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3186 Res, 220 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 52210
3247 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3248 Res, 470K, 5%, 1/10W, Metalized Glass 3198 021 54740
3251 Res, 47 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 54790
3261 Res, 47 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 54790
3271 Res, 47 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 54790
3281 Res, 220 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 52210
3286 Res, 220 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 52210
3320 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3321 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3323 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3324 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3325 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3326 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3331 Res, 1M, 5%, 1/10W, Metalized Glass. 3198 021 51050
3332 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3333 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3335 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3336 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3339 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3410 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3411 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3412 Res, 180 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 51810
3413 Res, 22 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 52290
3414 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3415 Res, 22 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 52290
3416 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3418 Res, 22 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 52290
3419 Res, 430 ohm, 1%, 1/8W, Metalized Gla ss. 2322 734 64301
3420 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3421 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3422 Res, 22 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 52290
3424 Res, 390 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 53910
3425 Res, 470 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 54710
3426 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3427 Res, 390 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 53910
3428 Res, 220 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 52210
3429 Res, 180 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 51810
3430 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3431 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3432 Res, 180 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 51810
3433 Res, 22 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 52290
3434 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3435 Res, 22 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 52290
3436 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3438 Res, 22 ohm, 5%, 1/10W, Metalized Gla ss. 3198 021 52290
3439 Res, 430 ohm, 1%, 1/8W, Metalized Gla ss. 2322 734 64301
3441 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3442 Res, 220 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 52210
3443 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3444 Res, 390 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 53910
3445 Res, 470 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 54710
3446 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3447 Res, 390 ohm, 5%, 1/10W, Metalized Gl ass. 3198 021 53910

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115

S = Safety Part Be sure to use exact replacement part.

46PP9302H17 (continued)

6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/01 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC04	Back, Lower.	3135 033 00121	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Screen, Fresnel 50	3135 014 07781	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vert, 50	3135 034 01251	
AC30	Baffle, Assembly, 50	3135 037 50351	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151.	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668

CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854

S = Safety Part Be sure to use exact replacement part.

50PP9202/01 (continued)

2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC04	Back, Lower.	3135 033 00121	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Screen, Fresnel 50	3135 014 07781	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vert, 50	3135 034 01251	
AC30	Baffle, Assembly, 50	3135 037 50351	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151.	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668

CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854

S = Safety Part Be sure to use exact replacement part.

50PP9202/17 (continued)

2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/84 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC04	Back, Lower.	3135 033 00121	
AC06	Frame, Chassis	3135 034 00605	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror Mounting	3135 011 04751	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR Receiver.	3135 014 11151	
AC14	Screen, Fresnel 50	3135 014 07781	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC23	Bracket, SSB Module	3135 034 00372	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC29	Retainer, Screen, Vert, 50	3135 034 01251	
AC30	Baffle, Assembly, 50	3135 037 50351	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC36	Bracket, Chassis Hold-down	3135 011 02011	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
S DEFL	Yoke, Green DAV4360M.	2422 549 45208	
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209	
S FG2	Focus Control, 100M, 15KV.	2422 549 45198	
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler, CRT, 50V-46W (Red & Blue)	3135 011 03634	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC, Spring	3135 011 02331	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0183	Insulator.	3135 010 02351	
0184	Terminal	3135 010 02801	
0381	IC, Spring	3135 011 02331	
0382	Spring Clip for 7805	3135 011 02621	
0383	Insulator.	3135 030 50051	
0384	Terminal	3135 010 02801	
0385	Terminal	3135 010 02801	
1000	Heatsink, TO-220	3135 011 03291	
1002	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 5V, 5A.	2422 132 07314	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320

S = Safety Part Be sure to use exact replacement part.

7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668

CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854

S = Safety Part Be sure to use exact replacement part.

50PP9202/84 (continued)

2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

50PP9202/84F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

Model 50PP9202/84F Cabinet Parts

		Model 50PP9202/84F Cabinet Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Backcover, Upper	3135 034 00161
	AC04	Backcover, Lower	3135 033 00721
	AC06	Frame, Chassis	3135 034 00606
	AC07	Barrier, Rear.	3135 033 00141
	AC08	Frame, Rear Jack Panel	3135 034 02421
	AC09	Frame Assembly	3135 017 07261
	AC10	Bracket, Mirror, Lower	3135 034 02451
	AC11	Frame, PIP	3135 014 11101
	AC14	Lens, Fresnel.	3135 033 20191
	AC15	Screen, Lenticular	3135 033 20071
	AC16	Screen, Protector.	3135 034 01301
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror, Assembly, 50V Mylar.	3135 037 51161
	AC21	Bracket, Module.	3135 034 00361
	AC22	Frame, Side Jack Panel	3135 037 50632
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror Support.	3135 011 03005
	AC27	Overlay, Rear Jack Panel	3135 030 00032
	AC28	Retainer, Screen, Horiz, 50V-46W	3135 034 01221
	AC29	Retainer, Screen Vertical 50V.	3135 034 01251
	AC30	Baffle, Assembly	3135 037 51691
	AC31	Nameplate.	3135 015 02511
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	Owner's Manual	3135 035 20391
	AC34	Owner's Manual, Spanish.	3135 035 21461
	AC35	Quick Use Guide.	3135 035 20401
	AC35	Quick Use Guide, Spanish	3135 035 21451
	AC36	Bracket, Chassis Hold Down	3135 011 02011
	AC38	Cup, Baffle Mounting	3135 013 02761
	AC39	Caster	3135 030 40031
	DEFL	Yoke, Deflection, BY01715.	2422 549 45509
	FG2	Focuspot, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
	X1	Screw, 8-32X0.5, Torx (4 Used)	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (4 Used).	3135 014 02811
	X2	Lens, Delta 250.	3135 037 50711
	X3	Lens, C-Element, Green	3135 034 00731
	X3	Lens, C-Element, Clear	3135 034 00721
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 034 02561
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug Vent.	3135 034 02551
	X9	Coupler, 50V, 46W.	3135 011 03635
	X9	Coupler, Green	3135 011 04282

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0382	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	
9190	Wire Jumper, 0.58MM.	3198 036 90010	
9191	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668

S = Safety Part Be sure to use exact replacement part.

7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702

S = Safety Part Be sure to use exact replacement part.

50PP9202/84F (continued)

3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

50PP920217F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord, 7A	2422 070 98164	
AC02	Back Upper, 50	3135 034 00161	
AC03	Control Housing.	3135 037 50592	
AC04	Back, Lower.	3135 033 00122	
AC06	Frame, Chassis	3135 034 00606	
AC07	Barrier, Rear.	3135 033 00141	
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421	
AC09	Frame, Screen.	3135 017 07261	
AC10	Bracket, Mirror, Lower	3135 034 02451	
AC11	Frame, PIP	3135 014 11101	
AC13	Lens, IR, Receiver	3135 034 00861	
AC14	Lens Fresnel, 50 Pre-Lubed	3135 033 20191	
AC15	Screen, Lenticular, 50	3135 033 20071	
AC16	Screen, Protector, 50.	3135 034 01301	
AC17	Barrier, Light	3135 034 00891	
AC18	Mirror, Assembly, 50 Mylar	3135 037 51161	
AC21	Bracket, Module.	3135 034 00361	
AC22	Frame, Side Jack Panel	3135 037 50632	
AC25	Speaker, 8R, 15W	2422 264 00455	
AC26	Bracket, Mirror, Support	3135 011 03005	
AC27	Overlay, PIP Panel	3135 030 00032	
AC28	Retainer, Screen, Vert, 50	3135 034 01251	
AC29	Retainer, Screen, Horiz, 50V-46W	3135 034 01221	
AC30	Baffle, 50	3135 037 51691	
AC31	Nameplate.	3135 015 02511	
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391	
AC38	Baffle Mounting Cup.	3135 013 02761	
AC39	Caster	3135 030 40031	
AC40	Bracket, Mirror Upper.	3135 031 20021	
AC40A	Bracket, Mirror, Lower	3135 031 20011	
AC41	Bracket, Focus Control (Not Shown)	3135 034 00772	
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122	
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC50	Quick Use Guide, HDTV Monitor.	3135 035 20401	
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509	
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511	
REMOTE	Transmitter, RC2061/01	3128 147 14611	
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971	
X10	Ethylen Glycol/Glyceraol	4835 310 67032	
X11	Seal, CRT.	3135 013 02321	
X12	Bracket, CRT, Spring	3135 011 02371	
X13	Spring, Compression (4 Used)	3135 011 00611	
X14	Shoulder Bolt (4 Used)	3135 010 08101	
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682	
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682	
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682	
X16	Pad, CRT (Not Shown)	3135 014 02811	
S X17	Anode Leads (3 used)	4835 321 27397	
X2	Lens, Delta 250.	3135 037 50711	
X3	Lens, C-Element, Clear	3135 034 00721	
X3	Lens, C-Element, Green	3135 034 00731	
X4	Seal, Lens	3135 013 02632	
X5	Cap, Coupler	3135 014 02681	
X6	Diaphram, Coupler.	3135 013 01061	
X7	Seal, Vent Plug.	3135 013 01231	
X8	Plug, Vent	3135 014 02642	
X9	Coupler. 50V, 46W (Red & Blue).	3135 011 03635	
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281	

LSB Panel Parts

	LSB Panel Parts		
0033	Heatsink, TO-220	3135 011 03291	
0034	Heatsink, Vertical	3135 011 04591	
0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC-Spring, Clip for 6810	3135 011 01512	
0180	Heatsink .	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0381	IC, Spring	3135 011 02331	
0382	IC, Spring	3135 011 02331	
0383	Insulator.	3135 030 50051	
1000	Heatsink, TO-220	3135 011 03291	
1202	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
S 1305	Relay, 1 Pin, 5V, 5A	2422 132 07411	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	2222 479 90024
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720

S = Safety Part Be sure to use exact replacement part.

50PP920217F (continued)

3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

CRT Panel Parts

S = Safety Part Be sure to use exact replacement part.

0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701

50PP920217F (continued)

3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

51PP9303H/17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin.	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

AC04	LOWER BACK	3135 033 00931

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 11661

Rear Switch Panel Parts

Rear Switch Panel Parts

Model 51PP9303H/17 Cabinet Parts

Model 51PP9303H/17 Cabinet Parts

S	AC01	Power Cord, USA, 7A, 2M4	2422 070 98164
	AC02	Backcover, Upper, 51W.	3135 034 02281
	AC03	Customer Control Housing	3135 037 51402
	AC04	Backcover, Lower	3135 033 00931
	AC07	Barrier, Rear, 51W	3135 033 01012
	AC09	Screen, Frame Assembly,51W	3135 037 52111
	AC10	Bracket, Mirror Lower.	3135 034 02451
	AC13	LENS, IR Receiver.	3135 034 00861
	AC14	LENS, Fresnel.	3135 033 20341
	AC15	LENS, Lenticular, Fine Pitch	3135 033 20331
	AC16	Protector Screen, 51W.	3135 034 02291
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror, Mylar, 51W	3135 037 52141
	AC22	Bracket, Side Jack	3135 037 50633
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror Support.	3135 011 03005
	AC28	Retainer, Screen, Horiz, (Top)	3135 034 03401
	AC28	Retainer, Screen, Horiz, (Bottom).	3135 034 03411
	AC29	Retainer, Screen, Vert	3135 034 03421
	AC30	Baffle, Assembly, 51W (w/Control Housing & IR LENS)	3135 037 52241
	AC31	Wordmark, Philips, Dark Silver	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	Owner's Manual, American English	3135 035 21361
	AC36	Bracket, Chassis Holdown	3135 011 02011
	AC38	Cup, Baffle Mounting	3135 013 02461
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mirror Mylar.	3135 031 20431
	AC41	Bracket, Speaker 4X6 (Not Shown)	3135 034 02401
	AC42	Handle, PTV (Not Shown).	3135 034 03811
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English.	3135 035 21351
S	DEFL	DEFL YOKE BY01715 (Red, Green, & Blue).	2422 549 45509
S	FG2	Focuspot, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Remote Transimtter, RC2061/01.	3128 147 14611
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X12	Bracket, CRT, Spring	3135 011 02371
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown) (4 Used).	3135 014 02811
	X2	Lens, Delta 250.	3135 037 50711
	X3	Lens, C-Element, Green	3135 034 00731
	X3	Lens, C-Element, Clear	3135 034 00721
	X4	Seal, Lens	3135 013 02632
	X5	Coupler, Cap	3135 034 02561
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 034 02551
	X9	Coupler, 54V 50W	3135 011 01936
	X9	Coupler, Green	3135 011 04283

Cabinet & Accessory Parts

Cabinet & Accessory Parts

LSB Panel Parts

LSB Panel Parts

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

	0033	Heatsink, TO-220	3135 011 03291		2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0034	Heatsink, Vertical	3135 011 04591		2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	0035	Heatsink, TO-220	3135 011 03291		2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0037	Heatsink, TO-220	3135 011 03291		2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	0039	Heatsink, TO-220	3135 011 03291		2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	0041	Heatsink, TO-220	3135 011 03291		2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0043	Heatsink, TO-220	3135 011 03291		2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	0045	Heatsink, TO-220	3135 011 03291		2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	0047	Heatsink, TO-220	3135 011 03291		2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	0081	Heatsink, TO-247	3135 011 00553		2815	Cap, 10u, 20%, 250V, Electrolytic	2020 012 93495
	0082	Heatsink, Vertical Out	3135 037 50741		2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	0085	Heatsink, TO-220	3135 011 03291		2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	0129	Insulator	3135 010 02321		2819	Cap, 22n, 5%, 630v, Polypropylene	2222 375 90219
	0134	IC-Spring, Clip for 6810	3135 011 01512		2820	Cap, 4u7, 10%, 100V, Metalized Polyester	2222 368 90178
	0180	Heatsink	3135 031 60051		2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	0181	IC-Spring, Clip for 6810	3135 011 01512		2822	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	0182	IC, Spring	3135 011 02331		2823	Cap, 2n2, 10%, 50V, Ceramic	3198 019 12220
	0381	IC, Spring	3135 011 02331		2824	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	0383	Insulator	3135 030 50051		2825	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
	1000	Heatsink, TO-220	3135 011 03291		2826	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	1202	Connector, 4 Pin	2422 025 12479		2827	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035		2828	Cap, 470n, 10%, 63V, Metalized Polyester	2222 365 75474
	1500	Connector, 5 Pin	2422 025 11472		2829	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	1501	Connector, 4 Pin	2422 025 16153		2830	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
	1502	Connector, 4 Pin	2422 025 16153		2831	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	1503	Connector, 4 Pin	2422 025 16153		2832	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030
	1504	Connector, 3 Pin	2422 025 14409		2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	1505	Connector, 1 Pin	2422 015 18552		2834	Cap, 470p, 10%, 500V, Ceramic	3198 019 44710
	1506	Connector, 1 Pin	2422 015 18552		2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
	1510	Connector, 12 Pin	2422 025 08333		2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	1516	Connector, 12 Pin	2422 025 08333		2837	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
	1518	Connector, 12 Pin	2422 025 08333		2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
S	1801	Fuse, 2 A, 250V IEC	2422 086 10783		2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779		2840	Cap, 2n2, 10%, 1KV, Ceramic	3198 019 52220
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779		2841	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675		2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
	1901	Connector, 3 Pin	2412 020 00725		2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2301	Cap, 2n2, 10%, 2KV, Ceramic	2020 558 90559		2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2845	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	2303	Cap, 100u, 20%, 25V, Electrolytic	2020 012 92639		2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554		2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710		2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2306	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080		2902	Cap, 2n2, 10%, 1KV, Ceramic	3198 019 52220
	2307	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720		2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
	2308	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720		2904	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290		2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810		2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020		2907	Cap, 4n7, 10%, 250V, Metalized Polyester	2222 370 35472
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321		2910	Cap, 33n, 10%, 50V, Ceramic	3198 017 03330
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321		2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2917	Cap, 47u, 20%, 200V, Electrolytic	2020 012 93486
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		2918	Cap, 2n2, 10%, 1KV, Ceramic	3198 019 52220
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2920	Cap, 4u7, 20%, 250V, Electrolytic	2020 012 93293
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		2926	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	2328	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080		2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415		3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	2334	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720		3304	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3305	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090		3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass	3198 021 51590
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321		3307	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3308	Res, 0R22, 5%, 3/5W, Metal Film	3198 012 12270
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030		3309	Res, 0R22, 5%, 3/5W, Metal Film	3198 012 12270
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3310	Res, 390 ohm, 5%, 1/6W, Carbon Film	3198 011 03910
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210		3311	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790		3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3314	Res, 82K, 5%, 1/6W, Carbon Film	3198 011 08230
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471		3316	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471		3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
	2370	Cap, 100p, 10%, 500V, Ceramic	3198 019 41010		3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040		3322	Zero ohm, ""chip"" Jumper	2120 368 90118
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040				
S	2390	Cap, 2n2, 20%, v, Ceramic	2020 554 90173				
	2801	Cap, 47u, 20%, 160v, Electrolytic	2020 012 93545				
	2802	Cap, 22u, 20%, 250V, Electrolytic	2020 012 93386				
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555				
	2804	Cap, 470u, 20%, 35V, Electrolytic	3198 026 44710				

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic.	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2733	Cap, 470n, 10%, 25V, Ceramic	2020 552 96684
2735	Cap, 10u, 20%, 50v, Electrolytic . .	3198 029 51090
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
2814	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3794	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3795	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3797	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 330 ohm, 5%, 1/3W, Metal Film .	2322 205 33331
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4015	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4016	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Wire Jumper, 0.58MM.	3198 036 90010
5710	Wire Jumper, 0.58MM.	3198 036 90010
5711	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5712	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYV95A	9335 000 90133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Zener Diode, 5.1 volt.	9340 386 10115
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11222

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic. . . .	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716	IC, M87C257-90C1	9322 130 45668
7717	IC, ROM, M87C257 R_MERGE4.	3104 317 04491
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic 51W) . . .	3135 037 11711

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7001	IC, M24128-BWMN6	9322 152 35668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11383

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215

S = Safety Part Be sure to use exact replacement part.

51PP9303H/17 (continued)

7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

Rear Switch Panel Parts

Rear Switch Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper	3135 034 02281
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 51W	3135 037 52111
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel 51W.	3135 033 20341
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC16	Screen, Protector, 51W	3135 034 02291
AC17	Barrier, Light	3135 034 00891
AC18	Mirrorr, Mylar, 51W.	3135 037 52141
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror, Support	3135 011 03005
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Vert 51W	3135 034 02271
AC29	Retainer, Screen, Horiz 51W.	3135 034 02261
AC30	Baffle, 51W.	3135 037 52241
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20431
AC41	Bracket, Focus Control (Not Shown)	3135 034 00772
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21371
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 54V, 50W (Red & Blue)	3135 011 01935
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

LSB Panel Parts

0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429	
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291	
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310	
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472	
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478	
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790	
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486	
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020	
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223	
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221	
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221	
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590	
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270	
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270	
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910	
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590	
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540	
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118	
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702	
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004	
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730	
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310	
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703	
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510	
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702	
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221	
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870	
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020	
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201	
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201	
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201	
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710	
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780	
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872	
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872	
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720	
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080	
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710	
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580	
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580	
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720	
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080	
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472	
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472	
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108	
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730	
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3135 037 12001

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108

S = Safety Part Be sure to use exact replacement part.

51PP9363H17 (continued)

3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

	0025	Shield	3139 121 26532
	0200	Connector, 5 Pin.	2422 025 12481
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0236	Connector, 3 Pin	2412 020 00725
	0272	Connector, 3 Pin	2422 025 16382
	1802	Crystal Resonator, 14M31818, 20P	2422 543 00904
	2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2803	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2804	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2806	Cap, 220u, 20%, 10V, Electrolytic.	3198 025 12210
	2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
	2808	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2812	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2813	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
	2820	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2821	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
	2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2824	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2825	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
	2827	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
	2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2829	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
	2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

S = Safety Part Be sure to use exact replacement part.

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper	3135 034 02281
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
AC09	Frame, Screen, 51W	3135 037 52111
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel 51W.	3135 033 20341
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC16	Screen, Protector, 51W	3135 034 02291
AC17	Barrier, Light	3135 034 00891
AC18	Mirrorr, Mylar, 51W.	3135 037 52141
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror, Support	3135 011 03005
AC27	Overlay, Rear Jack	3135 030 00221
AC28	Retainer, Screen, Vert 51W	3135 034 02271
AC29	Retainer, Screen, Horiz 51W.	3135 034 02261
AC30	Baffle, 51W.	3135 037 52241
AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
AC34	Owner's Manual, American English . .	3135 035 21361
AC38	Cup, Baffle Mounting	3135 013 61027
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20431
AC41	Bracket, Focus Control (Not Shown) .	3135 034 00772
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English. .	3135 035 21351
S DEFL	Deflection Yoke, BY01715 (3 Used). .	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 54V, 50W (Red & Blue) . . .	3135 011 01935
X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

0035	Heatsink, TO-220	3135 011 03291	
0037	Heatsink, TO-220	3135 011 03291	
0039	Heatsink, TO-220	3135 011 03291	
0041	Heatsink, TO-220	3135 011 03291	
0043	Heatsink, TO-220	3135 011 03291	
0045	Heatsink, TO-220	3135 011 03291	
0047	Heatsink, TO-220	3135 011 03291	
0081	Heatsink, TO-247	3135 011 00553	
0082	Heatsink, Vertical Out	3135 037 50741	
0085	Heatsink, TO-220	3135 011 03291	
0129	Insulator.	3135 010 02321	
0134	IC-Spring, Clip for 6810	3135 011 01512	
0180	Heatsink	3135 031 60051	
0181	IC-Spring, Clip for 6810	3135 011 01512	
0182	IC, Spring	3135 011 02331	
0381	IC, Spring	3135 011 02331	
0383	Insulator.	3135 030 50051	
1000	Heatsink, TO-220	3135 011 03291	
1202	Connector, 4 Pin	2422 025 12479	
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035	
1500	Connector, 5 Pin	2422 025 11472	
1501	Connector, 4 Pin	2422 025 16153	
1502	Connector, 4 Pin	2422 025 16153	
1503	Connector, 4 Pin	2422 025 16153	
1504	Connector, 3 Pin	2422 025 14409	
1505	Connector, 1 Pin	2422 015 18552	
1506	Connector, 1 Pin	2422 015 18552	
1510	Connector, 12 Pin.	2422 025 08333	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779	
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675	
1901	Connector, 3 Pin	2412 020 00725	
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559	
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639	
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554	
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710	
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290	
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810	
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415	
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030	
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210	
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471	
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545	
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386	
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710	
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484	
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173	
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219	
2820	Cap, 4u7, 10%, 100V, Metalized Polyester	2222 368 90178	
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2828	Cap, 470n, 10%, 63V, Metalized Polyester	2222 365 75474	
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790	
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429	
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291	
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310	
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555	
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780	
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2907	Cap, 4n7, 10%, 250V, Metalized Polyester	2222 370 35472	
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478	
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790	
2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2917	Cap, 47u, 20%, 200V, Electrolytic.	2020 012 93486	
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020	
2920	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293	
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223	
3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221	
3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221	
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3305	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass	3198 021 51590	
3307	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3308	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270	
3309	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270	
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910	
3311	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590	
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3314	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230	
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540	
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118	

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic.	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic.	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic.	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic W)	3135 037 11221

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic 51W) . . .	3135 037 11711

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

51PW9303/17F (continued)

7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742

S = Safety Part Be sure to use exact replacement part.

1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

51PW936317F - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

Model 51PP9303H/17 Cabinet Parts

AC04	LOWER BACK	3135 033 00931

Rear Switch Panel Parts

Rear Switch Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	Mains Cord, 7A	2422 070 98164
AC02	Backcover, Upper	3135 034 02281
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear, 46W	3135 033 00251
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 51W	3135 037 52111
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel 51W.	3135 033 20341
AC15	Screen, Lenticular, 51W.	3135 033 20331
AC16	Screen, Protector, 51W	3135 034 02291
AC17	Barrier, Light	3135 034 00891
AC18	Mirrorr, Mylar, 51W.	3135 037 52141
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror, Support	3135 011 03005
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Vert 51W	3135 034 02271
AC29	Retainer, Screen, Horiz 51W.	3135 034 02261
AC30	Baffle, 51W.	3135 037 52241
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20431
AC41	Bracket, Focus Control (Not Shown)	3135 034 00772
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21371
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta 250.	3135 037 50711
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 54V, 50W (Red & Blue)	3135 011 01935
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

LSB Panel Parts

0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9). . .	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3135 037 12001

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108

S = Safety Part Be sure to use exact replacement part.

51PW936317F (continued)

3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle Assembly.	3135 037 50381
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic.	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic. . . .	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic. . . .	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215

S = Safety Part Be sure to use exact replacement part.

55PP9352/17 (continued)

7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55PP935201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle Assembly.	3135 037 50381
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC, Spring	3135 011 02331
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0183	Insulator.	3135 010 02351
	0184	Terminal	3135 010 02801
	0381	IC, Spring	3135 011 02331
	0382	Spring Clip for 7805	3135 011 02621
	0383	Insulator.	3135 030 50051
	0384	Terminal	3135 010 02801
	0385	Terminal	3135 010 02801
	1000	Heatsink, TO-220	3135 011 03291
	1002	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 5V, 5A.	2422 132 07314
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	2022 333 00164
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2914	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2917	Cap, 47u, 20%, 200V, Electrolytic.	2020 012 93486
	2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2920	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
	2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	3301	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3302	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3305	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
	3307	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3308	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3309	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3311	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3314	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230
	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215

S = Safety Part Be sure to use exact replacement part.

55PP935201 (continued)

7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT	9333 729 60653
7402	IC, HEF4053BT	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4	9352 639 81557
7802	IC, LD1117V33	9322 123 54687
7803	IC, TDA8601T/C1	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

	AC30	Baffle, 55W.	3135 037 51651
	AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
	AC34	Owner's Manual, American English . .	3135 035 21381
	AC38	Baffle Mounting Cup.	3135 013 02761
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mylar Mirror.	3135 031 20061
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English. .	3135 035 21371
S	DEFL	Deflection Yoke, BY01715 (3 Used). .	2422 549 45509
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, 60 55W.	3135 011 04272
	X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

1020	Connector, SIMM, 80 Pin.	2422 025 17242	
1021	Socket, Cinch, 2 Pin	2422 026 05293	
1024	Socket, Cinch, 12 Pin.	2422 026 05064	
1025	Socket, MDIN, 10 Pin	2422 026 04926	
1026	Socket, MDIN, 10 Pin	2422 026 04926	
1027	Socket, Cinch, 2 Pin	2422 026 05294	
1028	Connector, 3 Pin	2422 025 09191	
1030	Connector, 3 Pin	2422 025 11117	
1043	Connector, 10 Pin.	2422 025 16587	
1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1201	Connector, 10 Pin.	2422 025 12484	
1222	Connector, 5 Pin	2422 025 12481	
1250	Connector, 9 Pin	2422 025 16049	
1272	Connector, 3 Pin	2412 020 00725	
1302	Connector, 2 Pin	2422 025 09405	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin, 130mm.	3135 031 00601	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1702	Thyristor, BT169B.	9338 268 50126	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	
9154	Wire Jumper, 0.58MM.	3198 036 90010		9252	Wire Jumper, 0.58MM.	3198 036 90010	
9155	Wire Jumper, 0.58MM.	3198 036 90010		9254	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010		9255	Wire Jumper, 0.58MM.	3198 036 90010	
9157	Wire Jumper, 0.58MM.	3198 036 90010		9256	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010		9257	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290

S = Safety Part Be sure to use exact replacement part.

2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PP9363H17 (continued)

3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

Cabinet & Accessory Parts

AC04	Lower Back Cover	3135 033 00931

55PP9502/84 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used) .	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used) . .	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used). . .	3135 034 01281
AC30	Baffle,.	3135 037 50851
AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC41	Bracket, Sensor ACS, (Not shown) . .	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9)	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

1029	Socket, Cinch, 1 Pin	2422 026 04425	
1030	Connector, 3 Pin	2422 025 11117	
1043	Connector, 10 Pin.	2422 025 16587	
1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090	
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090	
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

SSB Panel Parts

55PP9502/84 (continued)

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

2462 Cap, 68p, 5%, 50V, Ceramic 3198 016 06890
2464 Cap, 3p3, 8%, 50V, Ceramic 3198 016 03380
2470 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2471 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2472 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2473 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2480 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2481 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2482 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2483 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2490 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2491 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2492 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2493 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2500 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2501 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2502 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2505 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2506 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2507 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2509 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2510 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2511 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2519 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2520 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2521 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2529 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2601 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2602 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2607 Cap, 47n, 10%, 25V, Ceramic. 3198 023 04730
2615 Cap, 100n, 5%, 16V, Polypropylene. . 2020 319 90005
2616 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2617 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2618 Cap, 2u2, +80/-20%, 10V, Ceramic . . 3198 017 22250
2619 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2620 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2621 Cap, 12p, 5%, 50V, Ceramic 3198 016 01290
2626 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2627 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2628 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2630 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2631 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2632 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2633 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2634 Cap, 22n, 10%, 50V, Ceramic. 3198 017 02230
2635 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2636 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2637 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2638 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2639 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2644 Cap, 100p, 5%, 50V, Ceramic. 3198 016 01010
2700 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2701 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2702 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2704 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2710 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2711 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2714 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2720 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2721 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2724 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2731 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2740 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2741 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2750 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2800 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2802 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2804 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2806 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2807 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2809 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2810 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2811 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2812 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2813 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2814 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2815 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2816 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2901 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2902 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2903 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2904 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2905 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2906 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2909 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2910 Cap, 10p, 5%, 50V, Ceramic 3198 016 01090
2911 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2912 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2913 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2922 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2923 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2924 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790

2931 Cap, 1n, 10%, 50V, Ceramic 3198 017 01020
2933 Cap, 1u, +80/-20%, 16V, Ceramic. . . 3198 017 21050
2944 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2945 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2951 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2952 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2953 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2957 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
2958 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2961 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2963 Cap, 47u, 20%, 16V, Electrolytic . . 3198 030 44790
2968 Cap, 100n, +80/-20%, 25V, Ceramic. . 3198 023 21040
3150 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3151 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3160 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3161 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3170 Res, 75 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 57590
3171 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3180 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3181 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3185 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3186 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3247 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3248 Res, 470K, 5%, 1/10W, Metalized Glass 3198 021 54740
3251 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3261 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3271 Res, 47 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 54790
3281 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3286 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3320 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3321 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass 3198 021 54720
3323 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3324 Res, 68K, 5%, 1/10W, Metalized Glass 3198 021 56830
3325 Res, 2K2, 5%, 1/10W, Metalized Glass 3198 021 52220
3326 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3331 Res, 1M, 5%, 1/10W, Metalized Glass. 3198 021 51050
3332 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3333 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3335 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3336 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3339 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3410 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3411 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3412 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3413 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3414 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3415 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3416 Res, 3K9, 5%, 1/10W, Metalized Glass 3198 021 53920
3418 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3419 Res, 430 ohm, 1%, 1/8W, Metalized Gla
ss. 2322 734 64301
3420 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3421 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3422 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3424 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3425 Res, 470 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 54710
3426 Res, 1K, 5%, 1/10W, Metalized Glass. 3198 021 51020
3427 Res, 390 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 53910
3428 Res, 220 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 52210
3429 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3430 Res, 15K, 5%, 1/10W, Metalized Glass 3198 021 51530
3431 Res, 5K6, 5%, 1/10W, Metalized Glass 3198 021 55620
3432 Res, 180 ohm, 5%, 1/10W, Metalized Gl
ass. 3198 021 51810
3433 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290
3434 Res, 100 ohm, 5%, 1/10W, Glass . . . 3198 021 51010
3435 Res, 22 ohm, 5%, 1/10W, Metalized Gla
ss. 3198 021 52290

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PP9502/84 (continued)

3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

55PP950201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle,.	3135 037 50851
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

55PP950201 (continued)

6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

55PP950217 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC14	Lens, Fresnel.	3135 033 20021
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle,.	3135 037 50851
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

55PP950217 (continued)

6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

55PW936317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC03	Control, Housing	3135 037 51402
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00231
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

	AC30	Baffle, 55W.	3135 037 51651
	AC31	Wordmark, Philips, Dark Silver . . .	3111 250 00301
	AC32	Bracket, Focus Control (Not Shown) .	3135 034 00772
	AC34	Owner's Manual, American English . .	3135 035 21381
	AC38	Baffle Mounting Cup.	3135 013 02761
	AC39	Caster	3135 030 40031
	AC40	Bracket, Mylar Mirror.	3135 031 20061
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English. .	3135 035 21371
S	DEFL	Deflection Yoke, BY01715 (3 Used). .	2422 549 45509
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used). . .	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, 60 55W.	3135 011 04272
	X9	Coupler, Green, (Part of CRT Asm.) .	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

7803	Transistor, PNP, BC857B.	3198 010 42150		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9165	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	
9148	Wire Jumper, 0.58MM.	3198 036 90010		9246	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010		9247	Wire Jumper, 0.58MM.	3198 036 90010	
9150	Wire Jumper, 0.58MM.	3198 036 90010		9248	Wire Jumper, 0.58MM.	3198 036 90010	
9151	Wire Jumper, 0.58MM.	3198 036 90010		9249	Wire Jumper, 0.58MM.	3198 036 90010	
9152	Wire Jumper, 0.58MM.	3198 036 90010		9250	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010		9251	Wire Jumper, 0.58MM.	3198 036 90010	
9154	Wire Jumper, 0.58MM.	3198 036 90010		9252	Wire Jumper, 0.58MM.	3198 036 90010	
9155	Wire Jumper, 0.58MM.	3198 036 90010		9254	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010		9255	Wire Jumper, 0.58MM.	3198 036 90010	
9157	Wire Jumper, 0.58MM.	3198 036 90010		9256	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010		9257	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557

S = Safety Part Be sure to use exact replacement part.

7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580

S = Safety Part Be sure to use exact replacement part.

5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

55PW936317F (continued)

3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

Cabinet & Accessory Parts

AC04	Lower Back Cover	3135 033 00931

55PW9383/17F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle, 55W.	3135 037 52301
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 60 55W.	3135 011 04272
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

SSB Panel Parts

0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55PW9383/17F (continued)

7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back Cover, Upper.	3135 034 00331
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00281
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen, 55W	3135 037 50881
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 55W	3135 033 20201
AC15	Screen, Lenticular	3135 033 20081
AC16	Screen, Protector.	3135 034 01331
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51191
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01281
AC30	Baffle, 55W.	3135 037 52301
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mylar Mirror.	3135 031 20061
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BY01715 (3 Used).	2422 549 45509
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, 60 55W.	3135 011 04272
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 3 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668

S = Safety Part Be sure to use exact replacement part.

55RW9515/35 (continued)

7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin.	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Cover, Back, Upper	3135 034 00171
AC03	Controls, Customer	3135 014 11143
AC04	Back, Lower.	3135 033 00121
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00141
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
AC09	Frame, Screen.	3135 017 07281
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 033 20011
AC15	Screen, Lenticular	3135 033 20091
AC16	Screen, Protector.	3135 034 01311
AC17	Barrier, Light	3135 034 00891
AC18	Mirror Assembly, Mylar	3135 037 51171
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, PIP Panel	3135 030 00032
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01261
AC30	Baffle, Assembly	3135 037 50361
AC31	Nameplate.	3135 015 02511
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151.	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747

S = Safety Part Be sure to use exact replacement part.

60PP9202/17 (continued)

1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP920201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Cover, Back, Upper	3135 034 00171
AC03	Controls, Customer	3135 014 11143
AC04	Back, Lower.	3135 033 00121
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00141
AC08	Frame, Rear Jack, 2-Tuner.	3135 034 02421
AC09	Frame, Screen.	3135 017 07281
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 033 20011
AC15	Screen, Lenticular	3135 033 20091
AC16	Screen, Protector.	3135 034 01311
AC17	Barrier, Light	3135 034 00891
AC18	Mirror Assembly, Mylar	3135 037 51171
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, PIP Panel	3135 030 00032
AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01261
AC30	Baffle, Assembly	3135 037 50361
AC31	Nameplate.	3135 015 02511
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 60PP9202 HDTV Monitor.	3135 035 20391
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT	3135 011 04271
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC, Spring	3135 011 02331
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0183	Insulator.	3135 010 02351
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 1m5.	2422 535 95723	
5808	Transformer, Signal Driver, UD151. .	2422 531 02515	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS316.	3198 010 10630	
6808	Diode, Signal, BAS316.	3198 010 10630	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS316.	3198 010 10630	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS316.	3198 010 10630	
6818	Diode, Signal, BAS316.	3198 010 10630	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS316.	3198 010 10630	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS316.	3198 010 10630	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS316.	3198 010 10630	
6830	Diode, Signal, BAS316.	3198 010 10630	
6831	Diode, Signal, BAS316.	3198 010 10630	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS316.	3198 010 10630	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS316.	3198 010 10630	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS316.	3198 010 10630	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS316.	3198 010 10630	
6913	Diode, Signal, BAS316.	3198 010 10630	
6914	Diode, Signal, BAS316.	3198 010 10630	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10162

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1W, Metal Film	3198 012 12230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS216.	9340 255 30115
6053	Diode, Signal, BAS216.	9340 255 30115
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

7701	Transistor, NPN, BC847B.	3198 010 42030		9148	Wire Jumper, 0.58MM.	3198 036 90010	
7704	Transistor, NPN, BC847B.	3198 010 42030		9149	Wire Jumper, 0.58MM.	3198 036 90010	
7705	Transistor, NPN, BC847B.	3198 010 42030		9150	Wire Jumper, 0.58MM.	3198 036 90010	
7706	Transistor, PNP, BC857B.	3198 010 42150		9151	Wire Jumper, 0.58MM.	3198 036 90010	
7707	Transistor, NPN, BC847B.	3198 010 42030		9152	Wire Jumper, 0.58MM.	3198 036 90010	
7708	Transistor, PNP, BC857B.	3198 010 42150		9153	Wire Jumper, 0.58MM.	3198 036 90010	
7710	Transistor, NPN, BC847B.	3198 010 42030		9154	Wire Jumper, 0.58MM.	3198 036 90010	
7800	Transistor, NPN, BC847B.	3198 010 42030		9155	Wire Jumper, 0.58MM.	3198 036 90010	
7801	Transistor, PNP, BC857B.	3198 010 42150		9156	Wire Jumper, 0.58MM.	3198 036 90010	
7802	Transistor, NPN, BC847B.	3198 010 42030		9157	Wire Jumper, 0.58MM.	3198 036 90010	
7803	Transistor, PNP, BC857B.	3198 010 42150		9158	Wire Jumper, 0.58MM.	3198 036 90010	
7804	Transistor, NPN, BC847B.	3198 010 42030		9159	Wire Jumper, 0.58MM.	3198 036 90010	
7805	Transistor, PNP, BC857B.	3198 010 42150		9160	Wire Jumper, 0.58MM.	3198 036 90010	
7806	Transistor, NPN, BC847B.	3198 010 42030		9161	Wire Jumper, 0.58MM.	3198 036 90010	
7808	Transistor, NPN, BC847B.	3198 010 42030		9162	Wire Jumper, 0.58MM.	3198 036 90010	
7809	Transistor, PNP, BC857B.	3198 010 42150		9163	Wire Jumper, 0.58MM.	3198 036 90010	
7810	Transistor, NPN, BC847B.	3198 010 42030		9164	Wire Jumper, 0.58MM.	3198 036 90010	
7811	Transistor, PNP, BC857B.	3198 010 42150		9165	Wire Jumper, 0.58MM.	3198 036 90010	
9003	Wire Jumper, 0.58MM.	3198 036 90010		9166	Wire Jumper, 0.58MM.	3198 036 90010	
9004	Wire Jumper, 0.58MM.	3198 036 90010		9167	Wire Jumper, 0.58MM.	3198 036 90010	
9005	Wire Jumper, 0.58MM.	3198 036 90010		9168	Wire Jumper, 0.58MM.	3198 036 90010	
9006	Wire Jumper, 0.58MM.	3198 036 90010		9169	Wire Jumper, 0.58MM.	3198 036 90010	
9007	Wire Jumper, 0.58MM.	3198 036 90010		9170	Wire Jumper, 0.58MM.	3198 036 90010	
9008	Wire Jumper, 0.58MM.	3198 036 90010		9171	Wire Jumper, 0.58MM.	3198 036 90010	
9011	Wire Jumper, 0.58MM.	3198 036 90010		9172	Wire Jumper, 0.58MM.	3198 036 90010	
9012	Wire Jumper, 0.58MM.	3198 036 90010		9173	Wire Jumper, 0.58MM.	3198 036 90010	
9013	Wire Jumper, 0.58MM.	3198 036 90010		9174	Wire Jumper, 0.58MM.	3198 036 90010	
9014	Wire Jumper, 0.58MM.	3198 036 90010		9175	Wire Jumper, 0.58MM.	3198 036 90010	
9015	Wire Jumper, 0.58MM.	3198 036 90010		9176	Wire Jumper, 0.58MM.	3198 036 90010	
9017	Wire Jumper, 0.58MM.	3198 036 90010		9177	Wire Jumper, 0.58MM.	3198 036 90010	
9026	Wire Jumper, 0.58MM.	3198 036 90010		9178	Wire Jumper, 0.58MM.	3198 036 90010	
9027	Wire Jumper, 0.58MM.	3198 036 90010		9179	Wire Jumper, 0.58MM.	3198 036 90010	
9028	Wire Jumper, 0.58MM.	3198 036 90010		9181	Wire Jumper, 0.58MM.	3198 036 90010	
9029	Wire Jumper, 0.58MM.	3198 036 90010		9182	Wire Jumper, 0.58MM.	3198 036 90010	
9030	Wire Jumper, 0.58MM.	3198 036 90010		9183	Wire Jumper, 0.58MM.	3198 036 90010	
9031	Wire Jumper, 0.58MM.	3198 036 90010		9185	Wire Jumper, 0.58MM.	3198 036 90010	
9035	Wire Jumper, 0.58MM.	3198 036 90010		9186	Wire Jumper, 0.58MM.	3198 036 90010	
9036	Wire Jumper, 0.58MM.	3198 036 90010		9187	Wire Jumper, 0.58MM.	3198 036 90010	
9037	Wire Jumper, 0.58MM.	3198 036 90010		9188	Wire Jumper, 0.58MM.	3198 036 90010	
9038	Wire Jumper, 0.58MM.	3198 036 90010		9189	Wire Jumper, 0.58MM.	3198 036 90010	
9040	Wire Jumper, 0.58MM.	3198 036 90010		9190	Wire Jumper, 0.58MM.	3198 036 90010	
9041	Wire Jumper, 0.58MM.	3198 036 90010		9191	Wire Jumper, 0.58MM.	3198 036 90010	
9042	Wire Jumper, 0.58MM.	3198 036 90010		9192	Wire Jumper, 0.58MM.	3198 036 90010	
9044	Wire Jumper, 0.58MM.	3198 036 90010		9193	Wire Jumper, 0.58MM.	3198 036 90010	
9100	Wire Jumper, 0.58MM.	3198 036 90010		9194	Wire Jumper, 0.58MM.	3198 036 90010	
9101	Wire Jumper, 0.58MM.	3198 036 90010		9195	Wire Jumper, 0.58MM.	3198 036 90010	
9102	Wire Jumper, 0.58MM.	3198 036 90010		9196	Wire Jumper, 0.58MM.	3198 036 90010	
9103	Wire Jumper, 0.58MM.	3198 036 90010		9197	Wire Jumper, 0.58MM.	3198 036 90010	
9104	Wire Jumper, 0.58MM.	3198 036 90010		9199	Wire Jumper, 0.58MM.	3198 036 90010	
9105	Wire Jumper, 0.58MM.	3198 036 90010		9201	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010		9202	Wire Jumper, 0.58MM.	3198 036 90010	
9107	Wire Jumper, 0.58MM.	3198 036 90010		9203	Wire Jumper, 0.58MM.	3198 036 90010	
9108	Wire Jumper, 0.58MM.	3198 036 90010		9204	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010		9205	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010		9206	Wire Jumper, 0.58MM.	3198 036 90010	
9111	Wire Jumper, 0.58MM.	3198 036 90010		9207	Wire Jumper, 0.58MM.	3198 036 90010	
9112	Wire Jumper, 0.58MM.	3198 036 90010		9208	Wire Jumper, 0.58MM.	3198 036 90010	
9113	Wire Jumper, 0.58MM.	3198 036 90010		9209	Wire Jumper, 0.58MM.	3198 036 90010	
9114	Wire Jumper, 0.58MM.	3198 036 90010		9210	Wire Jumper, 0.58MM.	3198 036 90010	
9115	Wire Jumper, 0.58MM.	3198 036 90010		9211	Wire Jumper, 0.58MM.	3198 036 90010	
9116	Wire Jumper, 0.58MM.	3198 036 90010		9212	Wire Jumper, 0.58MM.	3198 036 90010	
9117	Wire Jumper, 0.58MM.	3198 036 90010		9213	Wire Jumper, 0.58MM.	3198 036 90010	
9118	Wire Jumper, 0.58MM.	3198 036 90010		9214	Wire Jumper, 0.58MM.	3198 036 90010	
9119	Wire Jumper, 0.58MM.	3198 036 90010		9215	Wire Jumper, 0.58MM.	3198 036 90010	
9120	Wire Jumper, 0.58MM.	3198 036 90010		9217	Wire Jumper, 0.58MM.	3198 036 90010	
9121	Wire Jumper, 0.58MM.	3198 036 90010		9218	Wire Jumper, 0.58MM.	3198 036 90010	
9122	Wire Jumper, 0.58MM.	3198 036 90010		9219	Wire Jumper, 0.58MM.	3198 036 90010	
9123	Wire Jumper, 0.58MM.	3198 036 90010		9220	Wire Jumper, 0.58MM.	3198 036 90010	
9124	Wire Jumper, 0.58MM.	3198 036 90010		9221	Wire Jumper, 0.58MM.	3198 036 90010	
9125	Wire Jumper, 0.58MM.	3198 036 90010		9222	Wire Jumper, 0.58MM.	3198 036 90010	
9126	Wire Jumper, 0.58MM.	3198 036 90010		9223	Wire Jumper, 0.58MM.	3198 036 90010	
9127	Wire Jumper, 0.58MM.	3198 036 90010		9224	Wire Jumper, 0.58MM.	3198 036 90010	
9128	Wire Jumper, 0.58MM.	3198 036 90010		9225	Wire Jumper, 0.58MM.	3198 036 90010	
9129	Wire Jumper, 0.58MM.	3198 036 90010		9226	Wire Jumper, 0.58MM.	3198 036 90010	
9130	Wire Jumper, 0.58MM.	3198 036 90010		9227	Wire Jumper, 0.58MM.	3198 036 90010	
9131	Wire Jumper, 0.58MM.	3198 036 90010		9228	Wire Jumper, 0.58MM.	3198 036 90010	
9132	Wire Jumper, 0.58MM.	3198 036 90010		9229	Wire Jumper, 0.58MM.	3198 036 90010	
9133	Wire Jumper, 0.58MM.	3198 036 90010		9230	Wire Jumper, 0.58MM.	3198 036 90010	
9134	Wire Jumper, 0.58MM.	3198 036 90010		9231	Wire Jumper, 0.58MM.	3198 036 90010	
9135	Wire Jumper, 0.58MM.	3198 036 90010		9232	Wire Jumper, 0.58MM.	3198 036 90010	
9136	Wire Jumper, 0.58MM.	3198 036 90010		9233	Wire Jumper, 0.58MM.	3198 036 90010	
9137	Wire Jumper, 0.58MM.	3198 036 90010		9234	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010		9235	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010		9237	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010		9238	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010		9239	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010		9240	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010		9241	Wire Jumper, 0.58MM.	3198 036 90010	
9144	Wire Jumper, 0.58MM.	3198 036 90010		9242	Wire Jumper, 0.58MM.	3198 036 90010	
9145	Wire Jumper, 0.58MM.	3198 036 90010		9243	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010		9244	Wire Jumper, 0.58MM.	3198 036 90010	
9147	Wire Jumper, 0.58MM.	3198 036 90010		9245	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 10091

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 16308

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6963	Diode, Rect, S1D.	9322 128 69685
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic)	3135 037 10061

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747

S = Safety Part Be sure to use exact replacement part.

60PP920201 (continued)

1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP920217F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

Single Tuner PIP Panel Parts

0025	Shield	3139 121 26532
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0236	Connector, 3 Pin	2412 020 00725
0272	Connector, 3 Pin	2422 025 16382
1802	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
2801	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2803	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2804	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2805	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2806	Cap, 220u, 20%, 10V, Electrolytic. .	3198 025 12210
2807	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2808	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2809	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2810	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2811	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2812	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2813	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2814	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2815	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2816	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2817	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2818	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2819	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2820	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2821	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2822	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2823	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2824	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2825	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2826	Cap, 560p, 5%, 50V, Ceramic.	3198 016 05610
2827	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2828	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2829	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2830	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2831	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2832	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2833	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2834	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2836	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2837	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2840	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2841	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2890	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2891	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2892	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2893	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2894	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2895	Cap, 47p, 5%, 50V, Ceramic	3198 019 04790
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2930	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2931	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2932	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2933	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2934	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2935	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2936	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2937	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
3801	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3802	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3807	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3812	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3816	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3819	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3820	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3822	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3823	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3824	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3825	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3826	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3827	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3828	Res, 4M7, 5%, 1/10W, Metalized Glass	3198 021 54750
3829	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3830	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3831	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3832	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3833	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3834	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3836	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3839	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3840	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3844	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3845	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3849	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3850	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3853	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3854	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3855	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3856	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3857	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3858	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3859	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3860	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3864	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3866	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3870	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3871	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3872	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3890	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3915	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3916	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3917	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3918	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3919	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3920	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3921	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3922	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3923	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3924	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3925	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3926	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3927	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3956	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3958	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3960	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3961	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3962	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3968	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3969	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3970	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
4803	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4804	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4805	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4807	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4808	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4809	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4810	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4812	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4813	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4814	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4815	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4816	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4817	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4818	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4819	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4821	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5890	Coil, 10u.	3198 018 21090
5891	Coil, 10u.	3198 018 21090
5892	Coil, 10u.	3198 018 21090
5902	Coil, 4u7.	3198 018 24780
6801	Diode, Signal, BAT85	9336 247 60133
6890	Zener Diode, 3.9 volt.	3198 020 53980
7801	IC, HEF4053BT.	9333 729 60653
7803	IC, M65669SP	9322 146 60682
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, NPN, BC847B.	3198 010 42030
7806	Transistor, NPN, BC847B.	3198 010 42030
7807	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7813	Transistor, NPN, BC847B.	3198 010 42030
7816	Transistor, NPN, BC847B.	3198 010 42030
7817	Transistor, NPN, BC847B.	3198 010 42030
7891	Transistor, NPN, BC337-25.	3198 020 43530
7910	IC, M62320FP	9322 127 15682
7919	IC, TDA8601T/C1.	9351 538 90518
7920	Transistor, PNP, BC857B.	3198 010 42150
9800	Wire Jumper, 0.58MM.	3198 036 90010
9801	Wire Jumper, 0.58MM.	3198 036 90010
9802	Wire Jumper, 0.58MM.	3198 036 90010
9803	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9812	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9817	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
9820	Wire Jumper, 0.58MM.	3198 036 90010
9821	Wire Jumper, 0.58MM.	3198 036 90010
9822	Wire Jumper, 0.58MM.	3198 036 90010
9823	Wire Jumper, 0.58MM.	3198 036 90010
9824	Wire Jumper, 0.58MM.	3198 036 90010
9901	Wire Jumper, 0.58MM.	3198 036 90010
9902	Wire Jumper, 0.58MM.	3198 036 90010
9903	Wire Jumper, 0.58MM.	3198 036 90010
9905	Wire Jumper, 0.58MM.	3198 036 90010
9906	Wire Jumper, 0.58MM.	3198 036 90010
9907	Wire Jumper, 0.58MM.	3198 036 90010
9908	Wire Jumper, 0.58MM.	3198 036 90010
9912	Wire Jumper, 0.58MM.	3198 036 90010
9915	Wire Jumper, 0.58MM.	3198 036 90010
9921	Wire Jumper, 0.58MM.	3198 036 90010
9922	Wire Jumper, 0.58MM.	3198 036 90010
9923	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Single Tuner PIP Panel Assembly. . .	3139 137 22971

Rear Switch Panel Parts

Rear Switch Panel Parts

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mains Cord, 7A	2422 070 98164
	AC02	Cover, Back, Upper	3135 034 00171
	AC04	Back, Lower	3135 033 00122
	AC06	Frame, Chassis	3135 034 00606
	AC07	Barrier, Rear	3135 033 00141
	AC08	Frame, Rear Jack, 2-Tuner	3135 034 02421
	AC09	Frame, Screen	3135 017 07281
	AC10	Bracket, Mirror, Lower	3135 034 02451
	AC11	Frame, PIP	3135 014 11101
	AC13	Lens, IR, Receiver	3135 034 00861
	AC14	Lens, Fresnel, 60V	3135 033 20211
	AC15	Screen, Lenticular	3135 033 20091
	AC16	Screen, Protector	3135 034 01311
	AC17	Barrier, Light	3135 034 00891
	AC18	Mirror Assembly, Mylar	3135 037 51171
	AC21	Bracket, Module	3135 034 00361
	AC22	Frame, Side Jack Panel	3135 037 50632
	AC25	Speaker, 8R, 15W	2422 264 00455
	AC26	Bracket, Mirror Support	3135 011 03034
	AC27	Overlay, PIP Panel	3135 030 00032
	AC28	Retainer, Screen, Hroiz (2 Used)	3135 034 01231
	AC29	Retainer, Screen, Vert (2 Used)	3135 034 01261
	AC30	Baffle, 60V	3135 037 51701
	AC31	Nameplate	3135 015 02511
	AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
	AC34	DFU 60PP9202 HDTV Monitor	3135 035 20391
	AC38	Baffle Mounting Cup	3135 013 02761
	AC39	Caster	3135 030 40031
	AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
S	DEFL	Deflection Yoke, BY01715 (3 Used)	2422 549 45509
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used)	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X1	Screw, 8-32X0.5 TORX (4 Used)	3135 010 02971
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler	3135 013 01061
	X7	Seal, Vent Plug	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, 60 55W	3135 011 04272
	X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0382	IC, Spring	3135 011 02331
	0383	Insulator	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 1 Pin, 5V, 5A	2422 132 07411
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin	2422 025 08333
	1516	Connector, 12 Pin	2422 025 08333
	1518	Connector, 12 Pin	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic	3198 017 01030

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W, Metal Film	2322 193 53683
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3925	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3926	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3930	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3931	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830	
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3934	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225	
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090	
3937	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3940	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
S 5300	Transformer, US54107-00.	2422 531 02507	
5301	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5302	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5303	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5304	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Coil, 10u.	2422 535 95363	
5308	Coil, 1u	2422 535 95387	
5309	Coil, 10u.	2422 535 95363	
5310	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5311	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5312	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5313	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5314	Coil, 10u.	2422 535 95363	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5316	Coil, 10u.	2422 535 95363	
5317	Coil, 10u.	2422 535 95363	
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5321	Coil, 1u	2422 535 95387	
5322	Coil, 10u.	2422 535 95363	
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041	
5336	Coil, 10u.	2422 535 95363	
5801	Transformer, US40104-01.	2422 531 02512	
5802	Coil, 47u.	2422 535 95282	
5803	Coil, 2u2.	2422 535 91014	
5804	Coil, 5u1.	2422 549 45206	
5805	Coil, 90u.	2422 536 00272	
5807	Coil, 2u2.	2422 535 91014	
5808	Transformer, Signal Driver, UD15201-0	2422 531 02554	
5809	Coil, 47u.	3198 018 24790	
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434	
5902	Coil, 47u.	2422 535 95282	
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5904	High Voltage Generator, PTV.	3122 268 32865	
6301	Diode, Rect, BYV95C	9335 001 80133	
6302	Diode, Rect, 1N5062	9330 764 50133	
6303	Diode, Rect, 1N5062	9330 764 50133	
6304	Diode, Rect, BY229X-600	9340 380 20127	
6306	Diode, Rect, BY229X-600	9340 380 20127	
6307	Diode, Rect, BY229X-600	9340 380 20127	
6308	Diode, Rect, BY229X-600	9340 380 20127	
6309	Diode, Rect, BY229X-600	9340 380 20127	
6310	Diode, Rect, BYD33D	9337 234 00133	
6313	Diode, Signal, 1N4148.	9330 839 90133	
6314	Diode, Rect, BY229X-600	9340 380 20127	
6316	Diode, Rect, BY229X-600	9340 380 20127	
6317	Diode, Rect, BY229X-600	9340 380 20127	
6318	Diode, Rect, BYV95C	9335 001 80133	
6320	Diode, Signal, 1N4148.	9330 839 90133	
6321	Diode, Signal, 1N4148.	9330 839 90133	
6801	Diode, Rect, BY229X-200	9340 380 00127	
6802	Diode, Rect, BYV95C	9335 001 80133	
6803	Diode, Rect, BY229X-200	9340 380 00127	
6804	Zener Diode, 4.7 volt.	3198 010 24780	
6805	Diode, Rect, BYV27-200.	9335 526 80133	
6806	Diode, Rect, BYV27-200.	9335 526 80133	
6807	Diode, Signal, BAS216.	9340 255 30115	
6808	Diode, Signal, BAS216.	9340 255 30115	
6809	Diode, Rect, BYD33J	9337 234 20133	
6810	Diode, Rect, BYM357DX	9340 560 29127	
6811	Diode, Rect, BYV27-200.	9335 526 80133	
6812	Zener Diode, 68 volt	3198 010 26890	
6813	Zener Diode, 10 volt	9340 386 80115	
6814	Zener Diode, 10 volt	9340 386 80115	
6815	Diode, Signal, BAS216.	9340 255 30115	
6816	Zener Diode, 68 volt	3198 010 26890	
6817	Diode, Signal, BAS216.	9340 255 30115	
6818	Diode, Signal, BAS216.	9340 255 30115	
6819	Zener Diode, 18 volt	3198 010 21890	
6820	Zener Diode, 10 volt	9340 386 80115	
6821	Diode, Signal, BAS216.	9340 255 30115	
6822	Diode, Rect, BYV95C	9335 001 80133	
6823	Diode, Signal, BAS216.	9340 255 30115	
6824	Zener Diode, 10 volt	9340 386 80115	
6825	Zener Diode, 10 volt	9340 386 80115	
6826	Zener Diode, 18 volt	3198 010 21890	
6827	Diode, Rect, BYV27-200.	9335 526 80133	
6828	Zener Diode, 10 volt	9340 386 80115	
6829	Diode, Signal, BAS216.	9340 255 30115	
6830	Diode, Signal, BAS216.	9340 255 30115	
6831	Diode, Signal, BAS216.	9340 255 30115	
6832	Zener Diode, 15 volt	9340 387 20115	
6901	Diode, Signal, BAS216.	9340 255 30115	
6902	Zener Diode, 18 volt	3198 010 21890	
6903	Zener Diode, 4.7 volt.	3198 010 24780	
6904	Diode, Signal, BAS216.	9340 255 30115	
6905	Zener Diode, 3.9 volt.	3198 010 23980	
6906	Zener Diode, 8.2 volt.	3198 010 28280	
6908	Diode, Signal, BAS216.	9340 255 30115	
6909	Diode, Signal, 1N4148.	3198 010 10010	
6910	Diode, Signal, BAT85	9336 247 60133	
6912	Diode, Signal, BAS216.	9340 255 30115	
6913	Diode, Signal, BAS216.	9340 255 30115	
6914	Diode, Signal, BAS216.	9340 255 30115	
6915	Diode, Rect, BYV27-600.	9340 418 70133	
6916	Diode, Rect, BYV27-600.	9340 418 70133	
6917	Diode, Rect, BYV27-400.	9340 366 90133	
6919	Diode, Signal, BAT254.	9340 393 00115	
7300	Transistor, NPN, BC547B.	3198 020 40030	
7301	Transistor, FET, STW13NB60	9322 121 46687	
7302	IC, MC44603AP.	9322 108 36682	
7303	Optic Coupler, CQY80NG	9338 941 50682	
7304	IC, TL431BCLP.	9322 115 98676	
7305	IC, TL431BCLP.	9322 115 98676	
7309	Transistor, NPN, BC547B.	3198 020 40030	
7801	Transistor, NPN, BU2520AF.	9340 153 80127	
7802	Transistor, FET, 2SK2232	9322 135 90687	
7803	IC, LM393D	9339 849 10668	
7807	F.E.T. Signal, BSN304.	9340 235 30126	
7808	Transistor, NPN, BC847B.	3198 010 42030	
7809	Transistor, NPN, BC847B.	3198 010 42030	
7810	Transistor, NPN, BC847B.	3198 010 42030	
7811	IC, TDA8177.	9322 066 43687	
7812	Transistor, PNP, BF423	9332 593 60126	
7813	Transistor, NPN, BC847B.	3198 010 42030	
7814	Transistor, PNP, BC857B.	3198 010 42150	
7901	Transistor, NPN, BF487	9337 626 60112	
7902	Transistor, NPN, BC847B.	3198 010 42030	
7903	Transistor, PNP, BC327-25.	3198 020 43430	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, PNP, BC857B.	3198 010 42150	
7906	Transistor, NPN, BC847B.	3198 010 42030	
9000	Wire Jumper, 0.58MM.	3198 036 90010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	
9110	Wire Jumper, 0.58MM.	3198 036 90010	
9138	Wire Jumper, 0.58MM.	3198 036 90010	
9139	Wire Jumper, 0.58MM.	3198 036 90010	
9140	Wire Jumper, 0.58MM.	3198 036 90010	
9141	Wire Jumper, 0.58MM.	3198 036 90010	
9142	Wire Jumper, 0.58MM.	3198 036 90010	
9143	Wire Jumper, 0.58MM.	3198 036 90010	
9146	Wire Jumper, 0.58MM.	3198 036 90010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	
9156	Wire Jumper, 0.58MM.	3198 036 90010	
9158	Wire Jumper, 0.58MM.	3198 036 90010	
9161	Wire Jumper, 0.58MM.	3198 036 90010	
9162	Wire Jumper, 0.58MM.	3198 036 90010	
9165	Wire Jumper, 0.58MM.	3198 036 90010	
9166	Wire Jumper, 0.58MM.	3198 036 90010	
9167	Wire Jumper, 0.58MM.	3198 036 90010	
9168	Wire Jumper, 0.58MM.	3198 036 90010	
9169	Wire Jumper, 0.58MM.	3198 036 90010	
9170	Wire Jumper, 0.58MM.	3198 036 90010	
9171	Wire Jumper, 0.58MM.	3198 036 90010	
9172	Wire Jumper, 0.58MM.	3198 036 90010	
9173	Wire Jumper, 0.58MM.	3198 036 90010	
9176	Wire Jumper, 0.58MM.	3198 036 90010	
9177	Wire Jumper, 0.58MM.	3198 036 90010	
9178	Wire Jumper, 0.58MM.	3198 036 90010	
9179	Wire Jumper, 0.58MM.	3198 036 90010	
9180	Wire Jumper, 0.58MM.	3198 036 90010	
9181	Wire Jumper, 0.58MM.	3198 036 90010	
9187	Wire Jumper, 0.58MM.	3198 036 90010	
9188	Wire Jumper, 0.58MM.	3198 036 90010	
9189	Wire Jumper, 0.58MM.	3198 036 90010	

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
9818	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 4:3) . . .	3135 037 10981

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL	2422 542 90108
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 22K, 5%, 1 1/3W, Metal Film . .	3198 012 22230
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6014	Diode, Signal, BAV99	9332 153 70215
6018	Diode, Signal, BAV99	9332 153 70215
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic)	3135 037 11211

SSB Panel Parts

	SSB Panel Parts	
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3080	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%.	3198 031 11010
3791	Resistor Network, 100 ohm, 5%.	3198 031 11010
3792	Resistor Network, 100 ohm, 5%.	3198 031 11010
3793	Resistor Network, 100 ohm, 5%.	3198 031 11010
3794	Resistor Network, 100 ohm, 5%.	3198 031 11010
3795	Resistor Network, 100 ohm, 5%.	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4613	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R.	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic)	3104 328 25621

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3957	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	3198 020 56880
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215

CBA	HOP Panel Assembly (Basic)	3135 037 10061
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502

S = Safety Part Be sure to use exact replacement part.

60PP920217F (continued)

3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP9352/17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH, ...	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50391
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC, Spring	3135 011 02331
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0183	Insulator.	3135 010 02351
	0184	Terminal	3135 010 02801
	0381	IC, Spring	3135 011 02331
	0382	Spring Clip for 7805	3135 011 02621
	0383	Insulator.	3135 030 50051
	0384	Terminal	3135 010 02801
	0385	Terminal	3135 010 02801
	1000	Heatsink, TO-220	3135 011 03291
	1002	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 5V, 5A.	2422 132 07314
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypr opylene.	2022 333 00164
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
	2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
	2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
	3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PP9352/17 (continued)

7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

60PP935201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00091
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50391
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual	3135 035 20531
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC, Spring	3135 011 02331
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0183	Insulator.	3135 010 02351
	0184	Terminal	3135 010 02801
	0381	IC, Spring	3135 011 02331
	0382	Spring Clip for 7805	3135 011 02621
	0383	Insulator.	3135 030 50051
	0384	Terminal	3135 010 02801
	0385	Terminal	3135 010 02801
	1000	Heatsink, TO-220	3135 011 03291
	1002	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S	1305	Relay, 5V, 5A.	2422 132 07314
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F . . .	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2303	Cap, 100u, 20%, 25V, Electrolytic. .	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2313	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2316	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypr opylene.	2022 333 00164
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
	2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
	2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
	2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
	2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
	2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
	3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
	3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630
6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9810	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10171

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

1102	Connector, 12 Pin.	2422 025 08333	
1106	Tuner, V+U, PLL.	2422 542 90113	
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	
1250	Connector, 9 Pin	2422 025 16049	
1303	Connector, 5 Pin	2422 025 10428	
1335	Connector, 10 Pin.	2422 025 12484	
1344	Connector, 3 Pin	2412 020 00725	
1349	Connector, 5 Pin	2422 025 15832	
1410	Cable, 1 Pin, 70mm	3135 031 00531	
1411	Cable, 1 Pin, 240mm.	3135 031 00521	
1412	Cable, 1 Pin to 1 Pin.	3135 031 00571	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1610	Connector, 5 Pin	2422 025 12481	
1681	Connector, 3 Pin	2422 025 10768	
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	
1950	Connector, 9 Pin	2422 025 16049	
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2009	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080	
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790	
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812	
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343	
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040	
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374	
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814	
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030	
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840	
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250	
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710	
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3790	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3791	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3799	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7711	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Basic +)	3135 037 10351

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0026	Shielding, Bottom Cover, SSB	3104 301 24051
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2591	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3462	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4401	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, MSP3451G-FH-B8	9322 169 39702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SAA4978H/V203.	9352 640 20557
7714	IC, MSM54V12222A-30JS.	9322 121 55668
7715	IC, MSM54V12222A-30JS.	9322 121 55668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
CBA	SSB Module Assembly (Basic +). . . .	3104 328 20983

ACS Manual Assembly

	ACS Manual Assembly	
0001	Shield Wrap.	3135 011 04131
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 10246

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PP935201 (continued)

7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Basic +)	3135 037 10071

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC04	Back, Lower, 51W	3135 033 00931
AC07	Barrier, Rear.	3135 033 00291
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 51671
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

	AC39	Caster	3135 030 40031
	AC40	Bracket, Mirror, Mylar	3135 031 20131
	AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC50	Quick Use Guide, American English.	3135 035 21371
S	DEFL	Deflection Yoke, BLACK, BY01715 (3 Used)	00CL ICK HERE
S	FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
	REMOTE	Transmitter, RC2061/01	3128 147 14611
	X10	Ethylen Glycol/Glyceraol	4835 310 67032
	X11	Seal, CRT.	3135 013 02321
	X13	Spring, Compression (4 Used)	3135 011 00611
S	X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S	X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S	X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
	X16	Pad, CRT (Not Shown)	3135 014 02811
S	X17	Anode Leads (3 used)	4835 321 27397
	X2	Lens, Delta, 260	3135 037 50721
	X3	Lens, C-Element, Clear	3135 034 00721
	X3	Lens, C-Element, Green	3135 034 00731
	X4	Seal, Lens	3135 013 02632
	X5	Cap, Coupler	3135 014 02681
	X6	Diaphram, Coupler.	3135 013 01061
	X7	Seal, Vent Plug.	3135 013 01231
	X8	Plug, Vent	3135 014 02642
	X9	Coupler, CRT, Red or Blue.	3135 011 02555
	X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

		LSB Panel Parts	
	0033	Heatsink, TO-220	3135 011 03291
	0034	Heatsink, Vertical	3135 011 04591
	0035	Heatsink, TO-220	3135 011 03291
	0037	Heatsink, TO-220	3135 011 03291
	0039	Heatsink, TO-220	3135 011 03291
	0041	Heatsink, TO-220	3135 011 03291
	0043	Heatsink, TO-220	3135 011 03291
	0045	Heatsink, TO-220	3135 011 03291
	0047	Heatsink, TO-220	3135 011 03291
	0081	Heatsink, TO-247	3135 011 00553
	0082	Heatsink, Vertical Out	3135 037 50741
	0085	Heatsink, TO-220	3135 011 03291
	0129	Insulator.	3135 010 02321
	0134	IC-Spring, Clip for 6810	3135 011 01512
	0180	Heatsink	3135 031 60051
	0181	IC-Spring, Clip for 6810	3135 011 01512
	0182	IC, Spring	3135 011 02331
	0381	IC, Spring	3135 011 02331
	0383	Insulator.	3135 030 50051
	1000	Heatsink, TO-220	3135 011 03291
	1202	Connector, 4 Pin	2422 025 12479
S	1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
	1500	Connector, 5 Pin	2422 025 11472
	1501	Connector, 4 Pin	2422 025 16153
	1502	Connector, 4 Pin	2422 025 16153
	1503	Connector, 4 Pin	2422 025 16153
	1504	Connector, 3 Pin	2422 025 14409
	1505	Connector, 1 Pin	2422 015 18552
	1506	Connector, 1 Pin	2422 015 18552
	1510	Connector, 12 Pin.	2422 025 08333
	1516	Connector, 12 Pin.	2422 025 08333
	1518	Connector, 12 Pin.	2422 025 08333
S	1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S	1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S	1900	Surge Protector, DSP-152M-A21F	2422 549 43675
	1901	Connector, 3 Pin	2412 020 00725
	2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
	2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
	2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
	2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
	2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
	2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
	2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
	2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
	2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
	2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
	2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
	2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S	2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
	2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
	2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
	2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
	2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
	2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
	2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
	2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
	2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
	2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
	2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
	2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
	2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
	2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
	2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
	2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
	2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
	2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
	2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
	2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
	2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
	2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
	2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
	2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
	2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
	2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
	2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
	2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
	2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
	2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

	1043	Connector, 10 Pin.	2422 025 16587		2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	1102	Connector, 12 Pin.	2422 025 08333		2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
	1106	Tuner, V+U, PLL.	2422 542 90113		2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1200	Filter, Ceramic, 4MHZ5	2422 549 43302		2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1201	Connector, 10 Pin.	2422 025 12484		2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	1222	Connector, 5 Pin	2422 025 12481		2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1250	Connector, 9 Pin	2422 025 16049		2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1272	Connector, 3 Pin	2412 020 00725		2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
	1302	Connector, 2 Pin	2422 025 09405		2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
	1303	Connector, 5 Pin	2422 025 10428		2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
	1335	Connector, 10 Pin.	2422 025 12484		2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
	1344	Connector, 3 Pin	2412 020 00725		2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
	1349	Connector, 5 Pin	2422 025 15832		2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	1410	Cable, 1 Pin, 70mm	3135 031 00531		2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	1411	Cable, 1 Pin, 240mm.	3135 031 00521		2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1412	Cable, 1 Pin, 130mm.	3135 031 00601		2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	1516	Connector, 12 Pin.	2422 025 08333		2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
	1518	Connector, 12 Pin.	2422 025 08333		2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
	1610	Connector, 5 Pin	2422 025 12481		2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
	1681	Connector, 3 Pin	2422 025 10768		2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S	1700	Fuse, 2 A, 250V IEC.	2422 086 10783		2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S	1701	Fuse, 2 A, 250V IEC.	2422 086 10783		2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	1702	Thyristor, BT169B.	9338 268 50126		2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	1950	Connector, 9 Pin	2422 025 16049		2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090		2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
	2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499		2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090		2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
	2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
	2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
	2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
	2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
	2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
	2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
	2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
	2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
	2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
	2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
	2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
	2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730		2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
	2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010		2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
	2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656		2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
	2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
	2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477		2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
	2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
	2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710		2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291		2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
	2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
	2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
	2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
	2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
	2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
	2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
	2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290		2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
	2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
	2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310		2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
	2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210		2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9177	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9187	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9189	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9202	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9205	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010	9231	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010	9232	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010	9233	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010	9234	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010	9235	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010	9237	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010	9238	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010	9239	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010	9240	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010	9241	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010	9242	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010	9243	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010	9244	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010	9245	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010	9246	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010	9247	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010	9248	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010	9249	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010	9250	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010	9251	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010	9252	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010	9254	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010	9255	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010	9256	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010	9257	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010	9258	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010	9259	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010	9260	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010	9261	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010	9263	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010	9264	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010	9265	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010	9266	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

ACS Manual Assembly

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

60PP9363H17 (continued)

3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP938317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 52311
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Glass.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PP938317F (continued)

9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP9502/17 - Manual no. 7621

Power Supply Panel Parts

	0035	Heatsink, TO-220	3135 011 03291
	0060	Heatsink,.	3135 031 60051
	0061	Spring	3135 011 01041
	0062	Insulator.	3135 010 02351
	0204	Heatsink, TO-220	3135 011 03291
	0218	Heatsink	3135 031 60071
	0219	Spring	3135 011 01041
	0220	Insulator.	3135 010 02341
	0231	Heatsink, TO-220	3135 011 03291
S	1000	Fuse, T 5A IEC	2422 093 00035
	1102	Connector, 12 Pin.	2422 025 08333
	1108	Connector, 4 Pin	2422 025 15503
	1110	Connector, 1 Pin	2422 015 18552
	1500	Connector, 5 Pin	2422 025 11472
	2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S	2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S	2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
	2004	Surge Protector, DSP-501N-A21F	2422 549 42349
	2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
	2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S	2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S	2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S	2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
	2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
	2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
	2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
	2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
	2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
	2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
	2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
	2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
	2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
	2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
	2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
	2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
	2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
	2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
	2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S	2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
	2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S	3011	Variable Resistor.	2322 595 90021
	3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
	3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
	3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
	3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
	3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
	3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
	3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
	3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S	5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
	5201	Line Filter 100uH,	2422 549 44101
	5202	Transformer, US28103-00.	2422 531 02496
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5234	Coil, 10u.	2422 535 95363
	5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5238	Coil, 10u.	2422 535 95363
	5240	Coil, 10u.	2422 535 95363
	5242	Coil, 10u.	2422 535 95363
	5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5244	Coil, 10u.	2422 535 95363
	5246	Coil, 10u.	2422 535 95363
	5247	Coil, 10u.	2422 535 95363
	6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6203	Diode, Rect, BY229X-200	9340 380 00127
	6204	Diode, Rect, PBYR10100X	9340 555 24127
	6207	Diode, Rect, BYD33D	9337 234 00133
	6231	Diode, Rect, PBYR10100X	9340 555 24127
	6236	Diode, Signal, 1N4148.	3198 010 10010
	6240	Zener Diode, 10 volt	3198 010 31090
	7205	Transistor, NPN, BC547B.	3198 020 40030
	7212	IC, TL431BCLP.	9322 115 98676
S	7213	Optic Coupler, CQY80NG	9338 941 50682
	7214	Transistor, NPN, BC547B.	3198 020 40030
	7215	F.E.T. Power	9322 134 76687
	7216	F.E.T. Power, 2SK2232.	9322 135 90687
	7217	F.E.T. Power, 2SK2232.	9322 135 90687
	7218	IC, TOP246Y.	9322 166 44687
	7220	Transistor, NPN, BC547B.	3198 020 40030
	7221	Transistor, NPN, BC547B.	3198 020 40030
	7222	Transistor, NPN, BC547B.	3198 020 40030
	9000	Wire Jumper, 0.58MM.	3198 036 90010
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9002	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9007	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9213	Wire Jumper, 0.58MM.	3198 036 90010
	9214	Wire Jumper, 0.58MM.	3198 036 90010
	9215	Wire Jumper, 0.58MM.	3198 036 90010
	9216	Wire Jumper, 0.58MM.	3198 036 90010
	9219	Wire Jumper, 0.58MM.	3198 036 90010
	9220	Wire Jumper, 0.58MM.	3198 036 90010
	CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

	0163	4 Pin Connector.	3139 110 38691
	0166	Cable, 3 Pin, 280mm.	3139 110 38551
	0172	Phono to Phone-120	3139 121 08861
	0178	Cable, 3 Pin, 280mm.	3139 131 01611
	0200	Connector, 5 Pin	2422 025 15848
	0201	Connector, 10 Pin.	2422 025 12484
	0205	Connector, 10 Pin.	2422 025 16587
	0207	Connector, 4 Pin	2422 025 12479
	0236	Connector, 3 Pin	2412 020 00725
	0237	1 Pin Connector.	2422 034 20021
	0256	Cable, 10 Pin, 180mm	3139 110 39351
	0273	Connector, 6 Pin	2422 025 12482
	1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
	1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
	1352	Filter, SAW, 45MHZ75.	2422 549 43074
	1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
	2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
	2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
	2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
	2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
	2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
	2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
	2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
	2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
	2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
	2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
	2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
	2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1.25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50861
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PP9502/17 (continued)

6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PP950201 - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R.	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC03	Customer Controls.	3135 017 07622
AC04	Back, Lower.	3135 033 00131
AC06	Frame, Chassis	3135 034 00605
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror Mounting	3135 011 04751
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR Receiver.	3135 014 11151
AC14	Lens, Fresnel.	3135 013 03451
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC23	Bracket, SSB Module	3135 034 00372
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, Assembly	3135 037 50861
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	DFU 55PP9502 HDTV Monitor.	3135 035 20551
AC36	Bracket, Chassis Hold-down	3135 011 02011
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC41	Bracket, Sensor ACS, (Not shown)	3135 034 01151
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
S DEFL	Inductor, Fixed, SCAVEM, DCV4215M (Not Shown)	2422 549 44097
S DEFL	Yoke, Green DAV4360M.	2422 549 45208
S DEFL	Yoke, Red or Blue, DAV4361M.	2422 549 45209
S FG2	Focus Control, 100M, 15KV.	2422 549 45198
REMOTE	Transmitter, RC2018/01IRT.	3128 147 13501
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X12	Bracket, CRT, Spring	3135 011 02371
X13	Spring, Compression (4 Used)	3135 011 00611
X14	Shoulder Bolt (4 Used)	3135 010 08101
S X15	CRT P16LFM00RFA(LU) Red.	9322 179 58682
S X15	CRT P16LFM00HHA(LU) Green.	9322 179 59682
S X15	CRT P16LFM00BMB(EU) Blue	9322 179 60682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0184	Terminal	3135 010 02801
0381	IC, Spring	3135 011 02331
0382	Spring Clip for 7805	3135 011 02621
0383	Insulator.	3135 030 50051
0384	Terminal	3135 010 02801
0385	Terminal	3135 010 02801
1000	Heatsink, TO-220	3135 011 03291
1002	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
S 1305	Relay, 5V, 5A.	2422 132 07314
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic .	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyes ter.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyes ter.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2901	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyes ter.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3359	Res, 68K, 5%, 1W	3198 012 16830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3363	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3818	Res, 2R2, 5%, 1W, Metal Film	3198 012 12280
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3863	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3902	Res, 3K3, 20%, 1/2W, Carbon Film . .	2120 103 90026
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5807	Coil, 1m5.	2422 535 95723
5808	Transformer, Signal Driver, UD151. .	2422 531 02515
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6807	Diode, Signal, BAS316.	3198 010 10630
6808	Diode, Signal, BAS316.	3198 010 10630
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6815	Diode, Signal, BAS316.	3198 010 10630
6816	Zener Diode, 68 volt	3198 010 26890
6817	Diode, Signal, BAS316.	3198 010 10630
6818	Diode, Signal, BAS316.	3198 010 10630
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6821	Diode, Signal, BAS316.	3198 010 10630
6822	Diode, Rect, BYV95C	9335 001 80133
6823	Diode, Signal, BAS316.	3198 010 10630
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6829	Diode, Signal, BAS316.	3198 010 10630
6830	Diode, Signal, BAS316.	3198 010 10630
6831	Diode, Signal, BAS316.	3198 010 10630
6832	Zener Diode, 15 volt	9340 387 20115
6901	Diode, Signal, BAS316.	3198 010 10630
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6904	Diode, Signal, BAS316.	3198 010 10630
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6908	Diode, Signal, BAS316.	3198 010 10630
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6912	Diode, Signal, BAS316.	3198 010 10630
6913	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

6914	Diode, Signal, BAS316.	3198 010 10630
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 10191

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 010 02351
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
0200	Connector, 5 Pin	2422 025 12481
0201	Connector, 10 Pin.	2422 025 12484
0207	Connector, 5 Pin	2422 025 12481
0272	Connector, 3 Pin	2412 020 00725
0302	Connector, 2 Pin	2422 025 09405
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 16599
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1250	Connector, 9 Pin	2422 025 16049
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3040	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3103	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3113	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3114	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Glass	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3143	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3180	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3181	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3304	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Glass	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Glass	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3718	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, BYD33D	9337 234 00133
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS316.	3198 010 10630
6010	Diode, Signal, BAS316.	3198 010 10630
6011	Diode, Signal, BAS316.	3198 010 10630
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	3198 020 56880
6017	Zener Diode, 6.8 volt.	3198 020 56880
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	3198 020 56880
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	3198 020 56880
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	3198 020 56880
6026	Zener Diode, 6.8 volt.	3198 020 56880
6027	Zener Diode, 6.8 volt.	3198 020 56880
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	3198 020 56880
6031	Zener Diode, 6.8 volt.	3198 020 56880
6032	Zener Diode, 6.8 volt.	3198 020 56880
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	3198 020 56880
6038	Zener Diode, 6.8 volt.	3198 020 56880
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6701	Thyristor, BT169B.	9338 268 50126
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9147	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 10841

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2120 108 93909
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9322 150 18685
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7716A	Socket, IC, 32 Pin, PLCC	2422 486 80938
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 15387

ACS Manual Assembly

	ACS Manual Assembly	
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 10255

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PP950201 (continued)

6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PW936317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polyp ropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F . . .	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polyp ropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic. .	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic .	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic .	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass .	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound. . .	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film . . .	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film . . .	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film. . .	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH, ...	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002 . .	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz. . . .	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y.	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC04	Back, Lower, 51W	3135 033 00931
AC07	Barrier, Rear.	3135 033 00291
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC12	Handles/Hand Wells (H/17 Models only)	3135 034 03811
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 15W	2422 264 00455
AC26	Bracket, Mirror Support.	3135 011 03034
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 51671
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21381
AC38	Baffle Mounting Cup.	3135 013 02761

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21371
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used)	00CL ICK HERE
S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT, P16LTG00HHA(U), Green.	9322 173 21682
S X15	CRT, P16LTG00RFA(U), Red	9322 173 22682
S X15	CRT, P16LTG00BMB(U), Blue.	9322 173 23682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2332	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic.	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic.	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic.	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene.	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
S 5300	Transformer, US54107-00.	2422 531 02507
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Basic 16:9).	3135 037 10991

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1030	Connector, 3 Pin	2422 025 11117

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

1043	Connector, 10 Pin.	2422 025 16587	2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
1102	Connector, 12 Pin.	2422 025 08333	2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
1106	Tuner, V+U, PLL.	2422 542 90113	2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1200	Filter, Ceramic, 4MHZ5	2422 549 43302	2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1201	Connector, 10 Pin.	2422 025 12484	2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
1222	Connector, 5 Pin	2422 025 12481	2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1250	Connector, 9 Pin	2422 025 16049	2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1272	Connector, 3 Pin	2412 020 00725	2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1302	Connector, 2 Pin	2422 025 09405	2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1303	Connector, 5 Pin	2422 025 10428	2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
1335	Connector, 10 Pin.	2422 025 12484	2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
1344	Connector, 3 Pin	2412 020 00725	2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
1349	Connector, 5 Pin	2422 025 15832	2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1410	Cable, 1 Pin, 70mm	3135 031 00531	2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
1411	Cable, 1 Pin, 240mm.	3135 031 00521	2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1412	Cable, 1 Pin, 130mm.	3135 031 00601	2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
1516	Connector, 12 Pin.	2422 025 08333	2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1518	Connector, 12 Pin.	2422 025 08333	2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
1610	Connector, 5 Pin	2422 025 12481	2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
1681	Connector, 3 Pin	2422 025 10768	2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783	2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783	2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
1702	Thyristor, BT169B.	9338 268 50126	2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
1950	Connector, 9 Pin	2422 025 16049	2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499	2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090	2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730	2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656	2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477	2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710	2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291	2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210	2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

9003	Wire Jumper, 0.58MM.	3198 036 90010	9167	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010	9168	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010	9169	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010	9170	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010	9171	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010	9172	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010	9173	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9174	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9175	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9176	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9177	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010	9178	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010	9179	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9181	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9182	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9183	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010	9185	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010	9186	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9187	Wire Jumper, 0.58MM.	3198 036 90010
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	9188	Wire Jumper, 0.58MM.	3198 036 90010
9037	Wire Jumper, 0.58MM.	3198 036 90010	9189	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9190	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9191	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010	9192	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010	9193	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010	9194	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010	9195	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010	9196	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010	9197	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010	9199	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010	9201	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010	9202	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010	9203	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010	9204	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010	9205	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010	9206	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010	9207	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010	9208	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9209	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010	9210	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010	9211	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010	9212	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010	9213	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010	9214	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010	9215	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010	9217	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010	9218	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010	9219	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010	9220	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010	9221	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010	9222	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010	9223	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010	9224	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010	9225	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010	9226	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010	9227	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010	9228	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010	9229	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010	9230	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010	9231	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010	9232	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010	9233	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010	9234	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010	9235	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010	9237	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010	9238	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010	9239	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010	9240	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010	9241	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010	9242	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010	9243	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010	9244	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010	9245	Wire Jumper, 0.58MM.	3198 036 90010
9148	Wire Jumper, 0.58MM.	3198 036 90010	9246	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010	9247	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010	9248	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010	9249	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010	9250	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010	9251	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010	9252	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010	9254	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010	9255	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010	9256	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010	9257	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010	9258	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010	9259	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010	9260	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010	9261	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010	9263	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010	9264	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010	9265	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010	9266	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

CBA	SSM Panel Assembly (Basic +)	3135 037 11231

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2353	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2354	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290
2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2385	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 1u, 10%, 10V, Ceramic	2020 552 96372
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2424	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2425	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3303	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3397	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3464	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4318	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	IC, TDA9181T	9352 630 99118
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Basic +)	3104 328 25651

ACS Manual Assembly

ACS Manual Assembly

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6006	Diode, Signal, BAS216.	9340 255 30115
6308	Diode, Signal, BAS216.	9340 255 30115
6309	Diode, Signal, BAS216.	9340 255 30115
6310	Diode, Signal, BAS216.	9340 255 30115
6311	Diode, Signal, BAS216.	9340 255 30115
6312	Diode, Signal, BAS216.	9340 255 30115
6313	Diode, Signal, BAS216.	9340 255 30115
6314	Diode, Signal, BAS216.	9340 255 30115
6315	Diode, Signal, BAS216.	9340 255 30115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
CBA	ACS Panel Assembly (Manual).	3135 037 11381

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215
7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Glass	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic.	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Glass	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic.	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

60PW936317F (continued)

3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581

60PW938317F - Manual no. 7621

Power Supply Panel Parts

0035	Heatsink, TO-220	3135 011 03291
0060	Heatsink,.	3135 031 60051
0061	Spring	3135 011 01041
0062	Insulator.	3135 010 02351
0204	Heatsink, TO-220	3135 011 03291
0218	Heatsink	3135 031 60071
0219	Spring	3135 011 01041
0220	Insulator.	3135 010 02341
0231	Heatsink, TO-220	3135 011 03291
S 1000	Fuse, T 5A IEC	2422 093 00035
1102	Connector, 12 Pin.	2422 025 08333
1108	Connector, 4 Pin	2422 025 15503
1110	Connector, 1 Pin	2422 015 18552
1500	Connector, 5 Pin	2422 025 11472
2000	Cap, 680n, 20%, 275V, Metalized Polypropylene	2222 336 29149
S 2002	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
S 2003	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2004	Surge Protector, DSP-501N-A21F	2422 549 42349
2005	Cap, 220n, 20%, 275V, Metalized Polypropylene	2222 336 29146
2006	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2007	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2008	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2009	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
S 2011	Cap, 470p, 10%, v, Ceramic	2020 554 90169
S 2012	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2013	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2206	Cap, 220u, 20%, 25V, Electrolytic.	2020 012 92641
2208	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2210	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2213	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2215	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2216	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2217	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2218	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
2219	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2226	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2227	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2228	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2269	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010
2270	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2283	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2284	Cap, 1000u, 20%, 35V, Electrolytic	2020 021 91411
2285	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91374
2286	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2287	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
2288	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
2289	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2290	Cap, 1u, 20%, 50V, Electrolytic.	2020 012 92647
2291	Cap, 1000u, 20%, 25V, Electrolytic	2020 012 93458
2292	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557
2293	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2294	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90519
S 2295	Cap, 470p, 10%, v, Ceramic	2020 554 90169
2296	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
3000	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3001	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3002	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3003	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3004	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3009	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3010	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
S 3011	Variable Resistor.	2322 595 90021
3012	Res, 1M, 5%, 1/2W, Metalized Glass	2322 242 13105
3013	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3014	Res, 1 ohm, 10%, 5W, Wire Wound.	2322 251 41108
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3203	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3205	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3206	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3207	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3208	Res, 220 ohm, 5%, 5W, Wire Wound	2322 251 41221
3209	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3210	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3216	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
3224	Res, 6R8, 1%, 3/5W, Metal Film	2322 156 26808
3225	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3239	Res, 10K, 1%, 3/5W, Metal Film	2322 156 21003
3244	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3247	Res, 10K7, 1%, 3/5W, Metal Film.	2322 156 21073
3248	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3249	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3250	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3252	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3253	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3254	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3255	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3256	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3259	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3260	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3261	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3262	Res, 39K, 5%, 1/6W, Carbon Film.	3198 011 03930
3263	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3264	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3265	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S 5000	Filter, Mains, 8MH, 7Amp	2422 549 44591
5201	Line Filter 100uH,	2422 549 44101
5202	Transformer, US28103-00.	2422 531 02496
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5234	Coil, 10u.	2422 535 95363
5237	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5238	Coil, 10u.	2422 535 95363
5240	Coil, 10u.	2422 535 95363
5242	Coil, 10u.	2422 535 95363
5243	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5244	Coil, 10u.	2422 535 95363
5246	Coil, 10u.	2422 535 95363
5247	Coil, 10u.	2422 535 95363
6000	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6001	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6203	Diode, Rect, BY229X-200	9340 380 00127
6204	Diode, Rect, PBYR10100X	9340 555 24127
6207	Diode, Rect, BYD33D	9337 234 00133
6231	Diode, Rect, PBYR10100X	9340 555 24127
6236	Diode, Signal, 1N4148.	3198 010 10010
6240	Zener Diode, 10 volt	3198 010 31090
7205	Transistor, NPN, BC547B.	3198 020 40030
7212	IC, TL431BCLP.	9322 115 98676
S 7213	Optic Coupler, CQY80NG	9338 941 50682
7214	Transistor, NPN, BC547B.	3198 020 40030
7215	F.E.T. Power	9322 134 76687
7216	F.E.T. Power, 2SK2232.	9322 135 90687
7217	F.E.T. Power, 2SK2232.	9322 135 90687
7218	IC, TOP246Y.	9322 166 44687
7220	Transistor, NPN, BC547B.	3198 020 40030
7221	Transistor, NPN, BC547B.	3198 020 40030
7222	Transistor, NPN, BC547B.	3198 020 40030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9216	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Power Supply Panel Assembly.	3135 037 10591

DW PIP Panel Parts

0163	4 Pin Connector.	3139 110 38691
0166	Cable, 3 Pin, 280mm.	3139 110 38551
0172	Phono to Phone-120	3139 121 08861
0178	Cable, 3 Pin, 280mm.	3139 131 01611
0200	Connector, 5 Pin	2422 025 15848
0201	Connector, 10 Pin.	2422 025 12484
0205	Connector, 10 Pin.	2422 025 16587
0207	Connector, 4 Pin	2422 025 12479
0236	Connector, 3 Pin	2412 020 00725
0237	1 Pin Connector.	2422 034 20021
0256	Cable, 10 Pin, 180mm	3139 110 39351
0273	Connector, 6 Pin	2422 025 12482
1327	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1334	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1352	Filter, SAW, 45MHZ75.	2422 549 43074
1501	Resonator, Crystal, 32.768kHz.	2422 543 01069
2261	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2262	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2265	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2269	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2301	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2302	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2303	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2306	Cap, 10n, +80/-20%, 50V, Ceramic	3198 017 41030
2309	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2311	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
2312	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2313	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2314	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2316	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2317	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2319	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 41040
2321	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2322	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2324	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2327	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2328	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2331	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2332	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2333	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2334	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2335	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2336	Cap, 820p, 5%, 50V, Ceramic.	3198 016 08210
2338	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2342	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2345	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2348	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2351	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2354	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2355	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2356	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2357	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2372	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2373	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2374	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2375	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2376	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2377	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2380	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2385	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2386	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2390	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2391	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2392	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2393	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2401	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2402	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2403	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2404	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2405	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2411	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2412	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2415	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2431	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2432	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2434	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2436	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2501	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2502	Cap, 8p2, 6%, 50V, Ceramic	3198 016 38280
2503	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2504	Cap, 68n, 10%, 25V, Ceramic.	2020 552 96325
2505	Cap, 560p, 5%, 25V, Ceramic.	3198 016 35610
2506	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2507	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2508	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 36820
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2511	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2813	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2817	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2818	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2819	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2821	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2822	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2823	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2824	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2825	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2829	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2831	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2832	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2833	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2834	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2836	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2837	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2838	Cap, 220u, 20%, 6.3V, Electrolytic .	3198 025 02210
2839	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2841	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2842	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2843	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2844	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2846	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2847	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2848	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2849	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2851	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2852	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2853	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2854	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2856	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2857	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2861	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2863	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2864	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2866	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2867	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2868	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2869	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2871	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
2872	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2873	Cap, 47n, 10%, 16V, Ceramic.	3198 017 34730
2874	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2876	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2877	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2878	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2879	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 41040
2891	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2892	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2893	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2894	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2895	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2896	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2897	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2898	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2899	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
3263	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3264	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3267	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3268	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3270	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3301	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3302	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3305	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3311	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3315	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3316	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3318	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3321	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3322	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3324	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3326	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3327	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3329	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3330	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3334	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3335	Res, 120 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51210
3336	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3338	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3340	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3341	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3344	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3346	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3347	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3348	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3364	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3365	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3370	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3371	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3374	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3381	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3382	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3383	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3384	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3385	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3386	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3387	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3388	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3389	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3390	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3401	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3402	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3403	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3404	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3405	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3411	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3412	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3413	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3414	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3415	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3416	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3417	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3423	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3424	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3431	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3432	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3437	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3438	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3439	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3451	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3453	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3460	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3461	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3462	Res, 2R2, 5%, 1/3W, Metal Film . . .	2306 204 03228
3501	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3502	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3503	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3504	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3506	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3507	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3508	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3509	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3510	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3801	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3802	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3803	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3804	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3805	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3806	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3807	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3808	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3809	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3810	Res, 680 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 36810
3811	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3812	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3813	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3814	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3816	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3817	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3818	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3821	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3822	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3823	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3824	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3825	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3826	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3827	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3828	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3829	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3832	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3833	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3834	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3836	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3837	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3838	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3839	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3846	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3854	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3856	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3862	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3863	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3865	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3866	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3868	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3869	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3871	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3872	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3873	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3874	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3876	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3878	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3879	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3881	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3884	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3886	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3887	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3888	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3889	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3890	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3891	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3892	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3893	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3894	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3895	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3896	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3897	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3898	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
4301	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4315	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4434	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4437	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4438	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4827	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4828	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4831	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
5261	Coil, 5u6.	3198 018 35680
5309	Coil, 6u8.	3198 018 66880
5332	Coil, 6u8.	3198 018 66880
5333	Coil, 6u8.	3198 018 66880
5334	Coil, 6u8.	3198 018 66880
5349	Coil, 820n	3198 018 38270
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Jumper	3139 121 07612
5501	Coil, 6u8.	3198 018 66880
5816	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5818	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5827	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5834	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5839	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5848	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5849	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5851	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5853	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6412	Diode, Signal, BAS316.	3198 010 10630
6415	Diode, Signal, BAS316.	3198 010 10630
6801	Zener Diode, 3.9 volt.	3198 020 53980
6802	Zener Diode, 3.9 volt.	3198 020 53980
6803	Diode, Signal, BAS316.	3198 010 10630
7201	Tuner, V+U PLL.	2422 542 90077
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, HEF4053BT.	9333 729 60653
7402	IC, HEF4053BT.	9333 729 60653
7403	IC, M62320FP	9322 127 15668
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, PNP, BC369	9332 592 50126
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Z86130-12SSC	9322 147 01668
7801	IC, SAB9081H/N4.	9352 639 81557
7802	IC, LD1117V33.	9322 123 54687
7803	IC, TDA8601T/C1.	9351 538 90518
7804	IC, 74HC1G32GW	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310
CBA	DW PIP Panel Assembly.	3139 127 28331

3D Comb Filter Module Parts

0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHZ.	2422 543 01273
1008	Connector, 9 Pin	2422 025 16046
1009	Connector, 9 Pin	2422 025 16046
2000	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2003	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20V, Electrolytic . .	3198 032 58170
2008	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2010	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2016	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2036	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2037	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2044	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2047	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2051	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2052	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2054	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2055	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2056	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2057	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3041	Res, 820 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3103	1.3 ohm, 6V, PTC	2122 662 00139
3104	1.3 ohm, 6V, PTC	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5003	14.3M, Fixed, 4FUS	2422 549 44784
5004	14.3M, Fixed, 4FUS	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	14.3M, Fixed, 4FUS	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120R. . . .	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, TLMH3100.	9322 072 71685
6004	Diode, Rect, S1D.	9322 128 69685
6005	Diode, Rect, S1D.	9322 128 69685
6006	Diode, Signal, 1PS76SB10	9340 453 90115
6007	Diode, Signal, BAS17	9335 262 30215
7000	Transistor, NPN, BC847B.	9335 895 90215
7001	Transistor, PNP, BC857B.	9335 897 60215
7002	Transistor, NPN, BF570	9338 144 20215
7003	Transistor, PNP, BC857B.	9335 897 60215
7004	Transistor, NPN, BC847B.	9335 895 90215
7005	Transistor, PNP, BC857B.	9335 897 60215
7006	Transistor, NPN, BF570	9338 144 20215
7007	Transistor, PNP, BC857B.	9335 897 60215
7008	Transistor, NPN, BC847B.	9335 895 90215
7009	Transistor, PNP, BC857B.	9335 897 60215
7010	Transistor, NPN, BC847B.	9335 895 90215
7011	Transistor, NPN, BC847B.	9335 895 90215
7012	Transistor, PNP, BF550	9334 509 00215
7015	Transistor, NPN, BC847B.	9335 895 90215
7016	Transistor, PNP, BC857B.	9335 897 60215
7017	Transistor, NPN, BC847B.	9335 895 90215
7019	IC, LM809M3X-3.08.	9322 163 48668
7020	Transistor, NPN, BC847B.	9335 895 90215
7021	IC, LD1117DT33.	9322 134 45668
7022	IC, LD1117DT25	9322 160 50668
7023	IC, UPD64083GF	9322 170 65671
CBA	3D Comb Filter Module Assembly . . .	3135 037 10261

DVI Panel Assembly Parts

1201	24 Pin DVI Socket, F, 1.91DVI-D Y. .	2422 033 00448
1203	Shield, Top.	3135 031 20212
1204	15 Pin Board Mounted Connector, F, 1 .25.	2422 025 17521
1205	Shield, Bottom	3135 031 20221
2000	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2001	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2002	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2003	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2006	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2007	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2012	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2013	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2014	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2015	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2016	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2017	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2018	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2019	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2020	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2021	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2022	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2023	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2024	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2025	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2028	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2029	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2032	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2033	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2034	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2035	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2036	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2037	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2038	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2039	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2040	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2041	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2042	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2043	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2044	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2045	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2046	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2047	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2048	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2049	Cap, 10u, 20%, 20V, Electrolytic . .	3198 032 55130
2050	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2051	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2053	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2054	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
3001	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3002	Res, 75 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 37590
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3006	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3007	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3008	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510
3009	Res, 150 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31510

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3010	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3011	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3012	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3013	Res, 150 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31510
3014	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62701
3015	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3020	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3021	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3022	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3023	Res, 75 ohm, 5%, 1/16W, Metalized Glass.	3198 021 37590
3027	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3028	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3030	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3031	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3032	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
5002	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5003	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5004	Coil, 1u5.	3198 018 31580
5005	Coil, 1u5.	3198 018 31580
5006	Coil, 1u5.	3198 018 31580
5007	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5008	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5009	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5010	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5011	Inductor, Fixed, 100MHz, 600R.	3198 018 90040
5014	Coil, 5u6.	3198 018 35680
5015	Coil, 5u6.	3198 018 35680
6001	Diode, Signal, BAS316.	3198 010 10630
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Rect, BYG10J	9322 099 61685
7001	IC, LD1117DT33 (ST00).	9322 134 45668
7002	IC, SII907BCQ52 (SIIM)	9322 183 61682
7003	IC, M24C02-WMN6 (ST00)	9322 145 26668
7005	IC, 74LVC14AD (PHSE)	9352 607 37118
7006	F.E.T. Signal, BSN20	9340 125 00235
7007	F.E.T. Signal, BSN20	9340 125 00235
CBA	DVI Panel Assembly	3135 037 10371

Rear Switch Panel Parts

	Rear Switch Panel Parts	
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slid, 4 Pin, 2 Position, 6A.	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779
CBA	Rear Switch Panel Assembly	3135 017 05541

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord, 7A	2422 070 98164
AC02	Back, Upper, 60 inch. Models	3135 034 00341
AC06	Frame, Chassis	3135 034 00606
AC07	Barrier, Rear.	3135 033 00291
AC08	Frame, Rear Jack, 1 Tuner.	3135 034 02431
AC09	Frame, Screen.	3135 037 50891
AC10	Bracket, Mirror, Lower	3135 034 02451
AC11	Frame, PIP	3135 014 11101
AC13	Lens, IR, Receiver	3135 034 00861
AC14	Lens, Fresnel, 60W	3135 033 20221
AC15	Screen, Lenticular	3135 013 03441
AC16	Screen, Protector.	3135 034 01341
AC17	Barrier, Light	3135 034 00891
AC18	Mirror, Mylar.	3135 037 51201
AC21	Bracket, Module.	3135 034 00361
AC22	Frame, Side Jack Panel	3135 037 50632
AC25	Speaker, 8R, 25W, Woofer, (2 Used)	2422 264 00453
AC25A	Speaker, 8R, 25W, Tweeter, (2 Used) (Not Shown)	2422 264 00452
AC26	Bracket, Mirror Support.	3135 011 03034
AC27	Overlay, Jack Panel.	3135 030 00061
AC28	Retainer, Screen, Horiz (2 Used)	3135 034 01241
AC29	Retainer, Screen, Vert (2 Used).	3135 034 01291
AC30	Baffle, 60W.	3135 037 52311
AC31	Wordmark, Philips, Dark Silver	3111 250 00301
AC32	Bracket, Focus Control (Not Shown)	3135 034 00772
AC34	Owner's Manual, American English	3135 035 21401
AC38	Baffle Mounting Cup.	3135 013 02761
AC39	Caster	3135 030 40031
AC40	Bracket, Mirror, Mylar	3135 031 20131
AC42	Cover, ComPair Connector (Not shown)	3135 014 11122
AC47	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC50	Quick Use Guide, American English.	3135 035 21391
CBA	Solar Cell Assembly (4 Used)	3135 038 70041
S DEFL	Deflection Yoke, BLACK, BY01715 (3 Used).	00CL ICK HERE

S = Safety Part Be sure to use exact replacement part.

S FG2	Focus G2, 100M, 15KV HSB222	2422 549 45511
REMOTE	Transmitter, RC2061/01	3128 147 14611
X1	Screw, 8-32X0.5 TORX (4 Used).	3135 010 02971
X10	Ethylen Glycol/Glyceraol	4835 310 67032
X11	Seal, CRT.	3135 013 02321
X13	Spring, Compression (4 Used)	3135 011 00611
S X15	CRT P16LXL00RFA(U) Red	9322 194 69682
S X15	CRT P16LXL00HHA(U) Green	9322 194 70682
S X15	CRT P16LXL00BMB(U) Blue.	9322 194 71682
X16	Pad, CRT (Not Shown)	3135 014 02811
S X17	Anode Leads (3 used)	4835 321 27397
X2	Lens, Delta, 260	3135 037 50721
X3	Lens, C-Element, Clear	3135 034 00721
X3	Lens, C-Element, Green	3135 034 00731
X4	Seal, Lens	3135 013 02632
X5	Cap, Coupler	3135 014 02681
X6	Diaphram, Coupler.	3135 013 01061
X7	Seal, Vent Plug.	3135 013 01231
X8	Plug, Vent	3135 014 02642
X9	Coupler, CRT, Red or Blue.	3135 011 02555
X9	Coupler, Green, (Part of CRT Asm.)	3135 011 04281

LSB Panel Parts

	LSB Panel Parts	
0033	Heatsink, TO-220	3135 011 03291
0034	Heatsink, Vertical	3135 011 04591
0035	Heatsink, TO-220	3135 011 03291
0037	Heatsink, TO-220	3135 011 03291
0039	Heatsink, TO-220	3135 011 03291
0041	Heatsink, TO-220	3135 011 03291
0043	Heatsink, TO-220	3135 011 03291
0045	Heatsink, TO-220	3135 011 03291
0047	Heatsink, TO-220	3135 011 03291
0081	Heatsink, TO-247	3135 011 00553
0082	Heatsink, Vertical Out	3135 037 50741
0085	Heatsink, TO-220	3135 011 03291
0129	Insulator.	3135 010 02321
0134	IC-Spring, Clip for 6810	3135 011 01512
0180	Heatsink	3135 031 60051
0181	IC-Spring, Clip for 6810	3135 011 01512
0182	IC, Spring	3135 011 02331
0381	IC, Spring	3135 011 02331
0383	Insulator.	3135 030 50051
1000	Heatsink, TO-220	3135 011 03291
1202	Connector, 4 Pin	2422 025 12479
S 1300	Fuse/Clip, 5 Amp, 250V	2422 093 00035
1500	Connector, 5 Pin	2422 025 11472
1501	Connector, 4 Pin	2422 025 16153
1502	Connector, 4 Pin	2422 025 16153
1503	Connector, 4 Pin	2422 025 16153
1504	Connector, 3 Pin	2422 025 14409
1505	Connector, 1 Pin	2422 015 18552
1506	Connector, 1 Pin	2422 015 18552
1510	Connector, 12 Pin.	2422 025 08333
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
S 1801	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1804	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1805	Fuse, LT 1A, 250V, IEC	2422 086 10779
S 1900	Surge Protector, DSP-152M-A21F	2422 549 43675
1901	Connector, 3 Pin	2412 020 00725
2301	Cap, 2n2, 10%, 2KV, Ceramic.	2020 558 90559
2302	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2303	Cap, 100u, 20%, 25V, Electrolytic.	2020 012 92639
2304	Cap, 330p, 10%, 1KV, Ceramic	2020 558 90554
2305	Cap, 470p, 10%, 50V, Ceramic	3198 019 14710
2306	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2307	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2308	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2309	Cap, 82p, 5%, 50V, Ceramic	3198 019 08290
2310	Cap, 680p, 10%, 50V, Ceramic	3198 019 16810
2311	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2312	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2313	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2314	Cap, 470u, 20%, 200V, Electrolytic	2020 021 91321
2315	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2316	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2317	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2318	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2319	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2320	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2321	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2322	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2323	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2324	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2325	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2326	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2327	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471
2328	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2329	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2330	Cap, 1000u, 20%, 50V, Electrolytic	2020 021 91415
2331	Cap, 1000u, 20%, 50V, Electrolytic	2020 012 93471

60PW938317F (continued)

2332	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2334	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720
2335	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2336	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2338	Cap, 470u, 20%, 200V, Electrolytic .	2020 021 91321
2346	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2349	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
2350	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2353	Cap, 220p, 10%, 50V, Ceramic	3198 019 12210
2354	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2361	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2362	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2363	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2364	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2365	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2366	Cap, 1000u, 20%, 50V, Electrolytic .	2020 012 93471
2370	Cap, 100p, 10%, 500V, Ceramic. . . .	3198 019 41010
2371	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2372	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
S 2390	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173
2801	Cap, 47u, 20%, 160v, Electrolytic. .	2020 012 93545
2802	Cap, 22u, 20%, 250V, Electrolytic. .	2020 012 93386
2803	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2804	Cap, 470u, 20%, 35V, Electrolytic. .	3198 026 44710
2805	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2806	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2807	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2808	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2810	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2811	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2812	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2813	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2814	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2815	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2816	Cap, 430n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2817	Cap, 560p, 10%, 2KV, Ceramic	2020 558 90484
2818	Cap, 8n2, 5%, 2KV, Polypropylene . .	2222 375 90173
2819	Cap, 22n, 5%, 630v, Polypropylene. .	2222 375 90219
2820	Cap, 4u7, 10%, 100V, Metalized Polyester.	2222 368 90178
2821	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2822	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2823	Cap, 2n2, 10%, 50V, Ceramic.	3198 019 12220
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2826	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2827	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2828	Cap, 470n, 10%, 63V, Metalized Polyester.	2222 365 75474
2829	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2830	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2831	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2832	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2833	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2834	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2835	Cap, 1m5, 20%, 35V, Electrolytic . .	2020 021 91429
2836	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2837	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2838	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2839	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2840	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2841	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2842	Cap, 1u, 20%, 250V, Electrolytic . .	2020 012 93291
2843	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2844	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2846	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
2847	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90555
2850	Cap, 510n, 5%, 250V, Metalized Polypropylene.	00CL ICK HERE
2901	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2902	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2903	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2904	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2905	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2907	Cap, 4n7, 10%, 250V, Metalized Polyester.	2222 370 35472
2908	Cap, 220p, 10%, 2KV, Ceramic	2020 558 90478
2910	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2911	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2912	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2913	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2914	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2915	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2916	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2917	Cap, 47u, 20%, 200V, Electrolytic. .	2020 012 93486
2918	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2919	Cap, 1n, 10%, 1KV, Ceramic	3198 019 61020
2920	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2921	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2922	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2924	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2925	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2926	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2927	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
3300	Res, 22K, 5%, 5W, Metal Film	2322 257 41223
3301	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3302	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3305	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3306	Res, 15 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51590
3307	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3308	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3309	Res, 0R22, 5%, 3/5W, Metal Film. . .	3198 012 12270
3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3311	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3312	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3314	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3322	Zero ohm, ""chip"" Jumper.	2120 368 90118
3323	Res, 2K7, 1%, 3/5W, Metal Film . . .	2312 915 12702
3324	Res, 100K, 1%, 3/5W, Metal Film. . .	2312 915 11004
3325	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3327	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3328	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3329	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3343	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3344	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3345	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3347	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3350	Res, 47K, 1%, 3/5W, Metal Film . . .	2312 915 14703
3351	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3352	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3353	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3354	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3355	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3356	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3357	Res, 4K7, 1%, 3/5W, Metal Film . . .	2312 915 14702
3358	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3360	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3361	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3362	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3365	Res, 220 ohm, 5%, 5W, Wire Wound . .	2322 251 41221
3801	Res, 0R68, 5%, 2 1/2W, Metal Film. .	3198 012 36870
3802	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
3803	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3804	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3805	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3806	Res, 220 ohm, 1%, 3/5W, Metal Film .	2312 915 12201
3807	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3808	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3809	Res, 4R7, 5%, 1W, Metal Film	3198 012 14780
3810	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3811	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3812	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3813	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3814	Res, 1K87, 1%, 1/8W, Metalized Glass	2322 734 61872
3815	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3816	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3817	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3819	Res, 470 ohm, 5%, 1W, Metal Film . .	3198 012 14710
3820	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3821	Res, 1R5, 5%, 1W, Metal Film	3198 012 11580
3822	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3823	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3824	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3825	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3826	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3829	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3832	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3833	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3834	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3835	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3836	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3837	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
3838	Res, 1 ohm, 5%, 1W, Metal Film . . .	3198 012 11080
3839	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472
3840	Res, 4K7, 5%, 5W, Metal Film	2322 257 41472

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3841	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3842	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3843	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3844	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3845	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3846	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3847	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3848	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3849	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3850	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3851	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3852	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3853	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3854	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3855	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3856	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3857	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3858	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3859	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3860	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3861	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3862	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3864	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3865	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3866	Res, 150 ohm, 5%, 1W, Metal Film . .	3198 012 11510
3867	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3868	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3900	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198 011 02720
3901	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3903	Res, 330K, 5%, 1/4W, Metalized Glass	2322 241 53334
3904	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3905	Res, 27K, 5%, 1/6W, Carbon Film. . .	3198 011 02730
3906	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3907	Res, 100 ohm, 20%, 1/2W, Carbon Film	2120 103 90057
3908	Res, 22 ohm, 5%, 1/3W, Metal Film. .	2322 205 33229
3909	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3910	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3911	Res, 56K, 1%, 3/5W, Metal Film . . .	2312 915 15603
3912	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3913	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3914	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3915	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3916	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3917	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3918	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3919	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3920	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124
3921	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3922	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3923	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3924	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3925	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3926	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3927	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3928	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3929	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3930	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3931	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3932	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3933	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3934	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3935	Res, 2M2, 5%, 1/4W, Metalized Glass.	2322 241 53225
3936	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3937	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3940	Res, 100K, 5%, 1/6W, Carbon Film . .	3198 011 01040
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5300	Transformer, US54108-00 B.	2422 531 02508
5301	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5302	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5303	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5304	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5305	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5306	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5307	Coil, 10u.	2422 535 95363
5308	Coil, 1u	2422 535 95387
5309	Coil, 10u.	2422 535 95363
5310	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5311	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5312	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5313	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5314	Coil, 10u.	2422 535 95363
5315	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5316	Coil, 10u.	2422 535 95363
5317	Coil, 10u.	2422 535 95363
5318	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5320	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5321	Coil, 1u	2422 535 95387
5322	Coil, 10u.	2422 535 95363
5323	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5330	Mains Filter, 80uH, 1.8Amp, W8051.	2422 549 44041
5336	Coil, 10u.	2422 535 95363
5801	Transformer, US40104-01.	2422 531 02512
5802	Coil, 47u.	2422 535 95282
5803	Coil, 2u2.	2422 535 91014
5804	Coil, 5u1.	2422 549 45206
5805	Coil, 90u.	2422 536 00272
5809	Coil, 47u.	3198 018 24790
5810	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5811	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5901	Transformer, Signal, DAF, W8073-001.	2422 531 02434
5902	Coil, 47u.	2422 535 95282
5903	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5904	High Voltage Generator, PTV.	3122 268 32865
6301	Diode, Rect, BYV95C	9335 001 80133
6302	Diode, Rect, 1N5062	9330 764 50133
6303	Diode, Rect, 1N5062	9330 764 50133
6304	Diode, Rect, BY229X-600	9340 380 20127
6306	Diode, Rect, BY229X-600	9340 380 20127
6307	Diode, Rect, BY229X-600	9340 380 20127
6308	Diode, Rect, BY229X-600	9340 380 20127
6309	Diode, Rect, BY229X-600	9340 380 20127
6310	Diode, Rect, BYD33D	9337 234 00133
6313	Diode, Signal, 1N4148.	9330 839 90133
6314	Diode, Rect, BY229X-600	9340 380 20127
6316	Diode, Rect, BY229X-600	9340 380 20127
6317	Diode, Rect, BY229X-600	9340 380 20127
6318	Diode, Rect, BYV95C	9335 001 80133
6320	Diode, Signal, 1N4148.	9330 839 90133
6321	Diode, Signal, 1N4148.	9330 839 90133
6801	Diode, Rect, BY229X-200	9340 380 00127
6802	Diode, Rect, BYV95C	9335 001 80133
6803	Diode, Rect, BY229X-200	9340 380 00127
6804	Zener Diode, 4.7 volt.	3198 010 24780
6805	Diode, Rect, BYV27-200.	9335 526 80133
6806	Diode, Rect, BYV27-200.	9335 526 80133
6809	Diode, Rect, BYD33J	9337 234 20133
6810	Diode, Rect, BYM357DX	9340 560 29127
6811	Diode, Rect, BYV27-200.	9335 526 80133
6812	Zener Diode, 68 volt	3198 010 26890
6813	Zener Diode, 10 volt	9340 386 80115
6814	Zener Diode, 10 volt	9340 386 80115
6816	Zener Diode, 68 volt	3198 010 26890
6819	Zener Diode, 18 volt	3198 010 21890
6820	Zener Diode, 10 volt	9340 386 80115
6822	Diode, Rect, BYV95C	9335 001 80133
6824	Zener Diode, 10 volt	9340 386 80115
6825	Zener Diode, 10 volt	9340 386 80115
6826	Zener Diode, 18 volt	3198 010 21890
6827	Diode, Rect, BYV27-200.	9335 526 80133
6828	Zener Diode, 10 volt	9340 386 80115
6832	Zener Diode, 15 volt	9340 387 20115
6902	Zener Diode, 18 volt	3198 010 21890
6903	Zener Diode, 4.7 volt.	3198 010 24780
6905	Zener Diode, 3.9 volt.	3198 010 23980
6906	Zener Diode, 8.2 volt.	3198 010 28280
6909	Diode, Signal, 1N4148.	3198 010 10010
6910	Diode, Signal, BAT85	9336 247 60133
6915	Diode, Rect, BYV27-600.	9340 418 70133
6916	Diode, Rect, BYV27-600.	9340 418 70133
6917	Diode, Rect, BYV27-400.	9340 366 90133
6919	Diode, Signal, BAT254.	9340 393 00115
7300	Transistor, NPN, BC547B.	3198 020 40030
7301	Transistor, FET, STW13NB60	9322 121 46687
7302	IC, MC44603AP.	9322 108 36682
7303	Optic Coupler, CQY80NG	9338 941 50682
7304	IC, TL431BCLP.	9322 115 98676
7305	IC, TL431BCLP.	9322 115 98676
7309	Transistor, NPN, BC547B.	3198 020 40030
7801	Transistor, NPN, BU2520AF.	9340 153 80127
7802	Transistor, FET, 2SK2232	9322 135 90687
7803	IC, LM393D	9339 849 10668
7807	F.E.T. Signal, BSN304.	9340 235 30126
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, NPN, BC847B.	3198 010 42030
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	IC, TDA8177.	9322 066 43687
7812	Transistor, PNP, BF423	9332 593 60126
7813	Transistor, NPN, BC847B.	3198 010 42030
7814	Transistor, PNP, BC857B.	3198 010 42150
7901	Transistor, NPN, BF487	9337 626 60112
7902	Transistor, NPN, BC847B.	3198 010 42030
7903	Transistor, PNP, BC327-25.	3198 020 43430
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, PNP, BC857B.	3198 010 42150
7906	Transistor, NPN, BC847B.	3198 010 42030
9000	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

9110	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9180	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9198	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010
9303	Wire Jumper, 0.58MM.	3198 036 90010
9304	Wire Jumper, 0.58MM.	3198 036 90010
9307	Wire Jumper, 0.58MM.	3198 036 90010
9308	Wire Jumper, 0.58MM.	3198 036 90010
9309	Wire Jumper, 0.58MM.	3198 036 90010
9804	Wire Jumper, 0.58MM.	3198 036 90010
9805	Wire Jumper, 0.58MM.	3198 036 90010
9807	Wire Jumper, 0.58MM.	3198 036 90010
9808	Wire Jumper, 0.58MM.	3198 036 90010
9809	Wire Jumper, 0.58MM.	3198 036 90010
9811	Wire Jumper, 0.58MM.	3198 036 90010
9813	Wire Jumper, 0.58MM.	3198 036 90010
9814	Wire Jumper, 0.58MM.	3198 036 90010
9815	Wire Jumper, 0.58MM.	3198 036 90010
9816	Wire Jumper, 0.58MM.	3198 036 90010
CBA	LSB Panel Assembly (Core 16:9) . . .	3135 037 11011

SSM Panel Parts

	SSM Panel Parts	
0001	Heatsink	3135 031 60071
0002	Insulator.	3135 033 10011
0003	Clip, Transistor	3135 011 02681
0011	Spring, Clip, Horiz.	3135 011 04572
0012	Spring, Clip, Horiz.	3135 011 04572
0045	Heatsink, Folded	3135 011 04555
0101	Heatsink, TO-220	3135 011 03291
0102	Heatsink, TO-220	3135 011 03291
0103	Heatsink, TO-220	3135 011 03291
0105	Heatsink, TO-220	3135 011 03291
0106	Heatsink, TO-220	3135 011 03291
1000	Connector, 15 Pin.	2422 025 16976
1001	Connector, 15 Pin.	2422 025 16976
1002	Connector, 1 Pin	2422 015 18552
1003	Connector, 1 Pin	2422 015 18552
1005	Connector, 4 Pin	2422 025 10647
1006	Connector, 4 Pin	2422 025 10647
1007	Connector, 4 Pin	2422 025 10647
1008	Connector, 9 Pin	2422 025 16049
1009	Connector, 9 Pin	2422 025 16049
1010	Connector, 1 Pin	2422 015 18552
1011	Connector, 3 Pin	2412 020 00725
1014	Connector, 7 Pin	2422 025 11244
1020	Connector, SIMM, 80 Pin.	2422 025 17242
1021	Socket, Cinch, 2 Pin	2422 026 05293
1024	Socket, Cinch, 12 Pin.	2422 026 05064
1025	Socket, MDIN, 10 Pin	2422 026 04926
1026	Socket, MDIN, 10 Pin	2422 026 04926
1027	Socket, Cinch, 2 Pin	2422 026 05294
1028	Connector, 3 Pin	2422 025 09191
1029	Socket, Cinch, 1 Pin	2422 026 04425
1030	Connector, 3 Pin	2422 025 11117
1043	Connector, 10 Pin.	2422 025 16587
1102	Connector, 12 Pin.	2422 025 08333
1106	Tuner, V+U, PLL.	2422 542 90113
1200	Filter, Ceramic, 4MHZ5	2422 549 43302
1201	Connector, 10 Pin.	2422 025 12484
1207	Connector, 4 Pin	2422 025 12479
1222	Connector, 5 Pin	2422 025 12481
1250	Connector, 9 Pin	2422 025 16049
1272	Connector, 3 Pin	2412 020 00725
1302	Connector, 2 Pin	2422 025 09405
1303	Connector, 5 Pin	2422 025 10428
1335	Connector, 10 Pin.	2422 025 12484
1344	Connector, 3 Pin	2412 020 00725
1349	Connector, 5 Pin	2422 025 15832
1410	Cable, 1 Pin, 70mm	3135 031 00531
1411	Cable, 1 Pin, 240mm.	3135 031 00521
1412	Cable, 1 Pin, 130mm.	3135 031 00601
1516	Connector, 12 Pin.	2422 025 08333
1518	Connector, 12 Pin.	2422 025 08333
1610	Connector, 5 Pin	2422 025 12481
1681	Connector, 3 Pin	2422 025 10768
S 1700	Fuse, 2 A, 250V IEC.	2422 086 10783
S 1701	Fuse, 2 A, 250V IEC.	2422 086 10783
1702	Thyristor, BT169B.	9338 268 50126
1950	Connector, 9 Pin	2422 025 16049
2000	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2001	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2002	Cap, 10u, 20%, 100V, Electrolytic. .	3198 025 71090
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2008	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2011	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2012	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2013	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2014	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2015	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2016	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2017	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2018	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2019	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2020	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2021	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2022	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2023	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2024	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2025	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2026	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2027	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2028	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2029	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730
2030	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2031	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2032	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2036	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2037	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2039	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2041	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2042	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2043	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2046	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2049	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2055	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2056	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2057	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2059	Cap, 470u, 20%, 50V, Electrolytic. .	3198 026 54710
2060	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2061	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2062	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2063	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2066	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2067	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2069	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2072	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2073	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2074	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2075	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2076	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2077	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2078	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2079	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2080	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2081	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2082	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2083	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2084	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2085	Cap, 47n, +80/-20%, 50V, Ceramic . .	3198 017 24730

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2086	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2087	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2088	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2089	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2090	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2091	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2092	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2093	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2094	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2095	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2096	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2097	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2098	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2099	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2102	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2103	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2104	Cap, 100n, +80/-20%, 50V, Ceramic. .	2020 552 95499
2105	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 028 51080
2107	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2108	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2109	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2110	Cap, 47u, 20%, 16V, Electrolytic . .	3198 028 24790
2111	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2113	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2115	Cap, 150p, 5%, 50V, Ceramic.	2020 552 94291
2130	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2131	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2132	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2133	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2134	Cap, 100n, +80/-20%, 50V, Ceramic. .	2238 580 19812
2140	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2141	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2150	Cap, 100u, 20%, 50V, Electrolytic. .	2020 012 92656
2156	Cap, 1n, 5%, 50V, Ceramic.	2020 552 93477
2411	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2412	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2413	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2414	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2415	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2416	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2417	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2418	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2421	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2423	Cap, 470n, +80/-20%, 16V, Ceramic. .	2020 552 95343
2440	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2441	Cap, 10u, 20%, 50V, Electrolytic . .	3198 029 51090
2442	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2467	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2701	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2702	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2703	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2704	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2705	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2706	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2707	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2708	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2709	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2710	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2711	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2712	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2714	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2715	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2716	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2718	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2719	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2720	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2721	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2722	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2723	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2724	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2725	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2726	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2727	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2728	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2730	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2731	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91374
2732	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2733	Cap, 220n, +80/-20%, 50V, Ceramic. .	2238 580 19814
2736	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2737	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 017 21030
2763	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2773	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2774	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2775	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2776	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2777	Cap, 680n, 10%, 50V, Polyester . . .	3198 014 06840
2778	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2780	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2781	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2801	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2802	Cap, 220u, 20%, 16V, Electrolytic. .	3198 025 22210
2803	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2805	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2807	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2809	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2811	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2813	Cap, 470u, 20%, 25V, Electrolytic. .	3198 026 34710
3000	Res, 15K, 5%, 1 1/3W, Metal Film . .	3198 012 21530
3001	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3002	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3003	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3004	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3005	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3006	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3007	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3008	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3010	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3012	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3013	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3014	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3015	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3017	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3018	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3021	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3022	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3023	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3024	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3025	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3026	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3027	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3033	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3034	Res, 22K, 1%, 1/8W, Metalized Glass.	2322 734 62203
3039	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3045	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3046	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3047	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3051	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3052	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3057	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3068	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3069	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3070	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3071	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3072	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3073	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3090	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3091	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3092	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3093	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3094	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3095	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3096	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3097	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3098	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3099	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3100	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3101	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3104	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3105	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3106	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3109	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3111	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3114	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3115	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3116	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3117	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3119	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3120	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3121	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3122	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3123	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3124	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3125	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3126	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3127	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3128	Res, 1K2, 5%, 1/6W, Carbon Film. . .	3198 011 01220
3129	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3130	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3131	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3138	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3139	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3140	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3142	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3144	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3145	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3147	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3148	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3149	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3150	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3151	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3152	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3153	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3154	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3155	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3156	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3157	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3158	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3159	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3160	Res, 6R8, 5%, 1W, Metal Film	2120 106 90297
3161	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3162	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3163	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3164	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3165	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3166	Res, 100 ohm, 5%, 3W, Metal Film . .	2120 105 93449
3167	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3169	Res, 4K7, 5%, 1/8W, Metalized Glass.	2322 730 61472
3175	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3176	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3177	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3182	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3183	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
3190	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3304	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3305	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3313	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3314	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3321	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3322	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3329	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3330	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3412	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3416	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3418	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3422	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3440	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3441	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3442	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3443	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3444	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3447	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3701	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3702	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3703	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3704	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3705	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3706	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3707	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3708	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3709	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3710	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3711	Res, 120K, 5%, 1/4W, Carbon Film . .	2120 101 74124
3712	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3713	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3714	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3715	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3716	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3717	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3718	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3719	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3720	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3721	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3722	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3723	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3724	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3725	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3726	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3730	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3731	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3732	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3733	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3790	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3791	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3792	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3793	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3796	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3798	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
3801	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3802	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3803	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3804	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3805	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3806	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3807	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3808	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3809	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3811	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3812	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3813	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3814	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3815	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3816	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3817	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3818	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3821	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3822	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3823	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3824	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3825	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3826	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3827	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3828	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3831	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3832	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3833	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3834	Res, 10 ohm, 5%, 1/6W, Carbon Film .	3198 011 01090
3836	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3838	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3841	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3842	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3843	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3844	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3845	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3846	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3847	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3848	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3851	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3852	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3853	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3854	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3855	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3856	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3857	Res, 680 ohm, 5%, 1/10W, Metalized Glass	3198 021 56810
3858	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4003	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4014	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 10u.	2422 535 95363
5001	Coil, 10u.	2422 535 95363
5002	Coil, 10u.	2422 535 95363
5003	Coil, 10u.	2422 535 95363
5004	Coil, 10u.	2422 535 95363
5005	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5006	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5007	Coil, 5u6.	3198 018 15680
5008	Inductor, Fixed, 100MHz, 600 ohm	3198 018 90080
5009	Coil, 15u.	3198 018 31590
5010	Coil, 15u.	3198 018 31590
5011	Coil, 10u.	2422 535 95363
5701	Coil, 68u.	2422 536 00385
5702	Coil, 68u.	2422 536 00385
5709	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5710	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5711	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5712	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5713	Coil, 10u.	2422 535 95363
5714	Coil, 10u.	2422 535 95363
5715	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5716	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
6001	Diode, Rect, S1D.	9322 128 69685
6002	Diode, Rect, S1D.	9322 128 69685
6003	Diode, Rect, S1D.	9322 128 69685
6004	Diode, Rect, SB140.	9339 577 60673
6005	Diode, Rect, S1D.	9322 128 69685
6009	Diode, Signal, BAS216.	9340 255 30115
6010	Diode, Signal, BAS216.	9340 255 30115
6011	Diode, Signal, BAS216.	9340 255 30115
6012	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Diode, Signal, BAV99	9332 153 70215
6016	Zener Diode, 6.8 volt.	9340 386 40115
6017	Zener Diode, 6.8 volt.	9340 386 40115
6018	Diode, Signal, BAV99	9332 153 70215
6019	Zener Diode, 6.8 volt.	9340 386 40115
6020	Diode, Signal, BAV99	9332 153 70215
6021	Diode, Signal, BAV99	9332 153 70215
6022	Zener Diode, 6.8 volt.	9340 386 40115
6023	Diode, Signal, BAV99	9332 153 70215
6024	Diode, Signal, BAV99	9332 153 70215
6025	Zener Diode, 6.8 volt.	9340 386 40115
6026	Zener Diode, 6.8 volt.	9340 386 40115
6027	Zener Diode, 6.8 volt.	9340 386 40115
6028	Diode, Signal, BAV99	9332 153 70215
6029	Diode, Signal, BAV99	9332 153 70215
6030	Zener Diode, 6.8 volt.	9340 386 40115
6031	Zener Diode, 6.8 volt.	9340 386 40115
6032	Zener Diode, 6.8 volt.	9340 386 40115
6034	Zener Diode, 33 volt	9340 388 00115
6036	Zener Diode, 4.7 volt.	3198 020 54780
6037	Zener Diode, 6.8 volt.	9340 386 40115
6038	Zener Diode, 6.8 volt.	9340 386 40115
6052	Diode, Signal, BAS316.	3198 010 10630
6053	Diode, Signal, BAS316.	3198 010 10630
6702	Diode, Rect, S1D.	9322 128 69685
7002	Transistor, NPN, BC847B.	3198 010 42030
7003	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC817-25.	3198 010 43230
7007	Transistor, NPN, BC817-25.	3198 010 43230
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	IC, CXA2089S	9322 162 27682
7025	Transistor, NPN, BC847B.	3198 010 42030
7026	Transistor, NPN, BC847B.	3198 010 42030
7044	IC, STK392-120	9322 123 44682
7045	IC, STK392-120	9322 123 44682
7101	IC, L7912CV.	9337 107 20682
7102	IC, L7908CV.	9322 069 79682
7103	IC, L7912CV.	9335 040 20682
7105	IC, L7912CV.	9335 202 90682
7106	IC, LM317T	9337 220 80682
7208	Transistor, NPN, BC847B.	3198 010 42030
7403	IC, TDA1308T/N1.	9350 721 10115
7415	Transistor, NPN, BC847B.	3198 010 42030
7700	IC, TDA7490.	9322 147 50667
7701	Transistor, NPN, BC847B.	3198 010 42030
7704	Transistor, NPN, BC847B.	3198 010 42030
7705	Transistor, NPN, BC847B.	3198 010 42030
7706	Transistor, PNP, BC857B.	3198 010 42150
7707	Transistor, NPN, BC847B.	3198 010 42030
7708	Transistor, PNP, BC857B.	3198 010 42150
7710	Transistor, NPN, BC847B.	3198 010 42030
7800	Transistor, NPN, BC847B.	3198 010 42030
7801	Transistor, PNP, BC857B.	3198 010 42150
7802	Transistor, NPN, BC847B.	3198 010 42030
7803	Transistor, PNP, BC857B.	3198 010 42150
7804	Transistor, NPN, BC847B.	3198 010 42030
7805	Transistor, PNP, BC857B.	3198 010 42150
7806	Transistor, NPN, BC847B.	3198 010 42030
7808	Transistor, NPN, BC847B.	3198 010 42030
7809	Transistor, PNP, BC857B.	3198 010 42150
7810	Transistor, NPN, BC847B.	3198 010 42030
7811	Transistor, PNP, BC857B.	3198 010 42150
9003	Wire Jumper, 0.58MM.	3198 036 90010
9004	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9006	Wire Jumper, 0.58MM.	3198 036 90010
9007	Wire Jumper, 0.58MM.	3198 036 90010
9008	Wire Jumper, 0.58MM.	3198 036 90010
9011	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9035	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9036	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
9037	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010
9041	Wire Jumper, 0.58MM.	3198 036 90010
9042	Wire Jumper, 0.58MM.	3198 036 90010
9044	Wire Jumper, 0.58MM.	3198 036 90010
9100	Wire Jumper, 0.58MM.	3198 036 90010
9101	Wire Jumper, 0.58MM.	3198 036 90010
9102	Wire Jumper, 0.58MM.	3198 036 90010
9103	Wire Jumper, 0.58MM.	3198 036 90010
9104	Wire Jumper, 0.58MM.	3198 036 90010
9105	Wire Jumper, 0.58MM.	3198 036 90010
9106	Wire Jumper, 0.58MM.	3198 036 90010
9107	Wire Jumper, 0.58MM.	3198 036 90010
9108	Wire Jumper, 0.58MM.	3198 036 90010
9109	Wire Jumper, 0.58MM.	3198 036 90010
9110	Wire Jumper, 0.58MM.	3198 036 90010
9111	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010
9113	Wire Jumper, 0.58MM.	3198 036 90010
9114	Wire Jumper, 0.58MM.	3198 036 90010
9115	Wire Jumper, 0.58MM.	3198 036 90010
9116	Wire Jumper, 0.58MM.	3198 036 90010
9117	Wire Jumper, 0.58MM.	3198 036 90010
9118	Wire Jumper, 0.58MM.	3198 036 90010
9119	Wire Jumper, 0.58MM.	3198 036 90010
9120	Wire Jumper, 0.58MM.	3198 036 90010
9121	Wire Jumper, 0.58MM.	3198 036 90010
9122	Wire Jumper, 0.58MM.	3198 036 90010
9123	Wire Jumper, 0.58MM.	3198 036 90010
9124	Wire Jumper, 0.58MM.	3198 036 90010
9125	Wire Jumper, 0.58MM.	3198 036 90010
9126	Wire Jumper, 0.58MM.	3198 036 90010
9127	Wire Jumper, 0.58MM.	3198 036 90010
9128	Wire Jumper, 0.58MM.	3198 036 90010
9129	Wire Jumper, 0.58MM.	3198 036 90010
9130	Wire Jumper, 0.58MM.	3198 036 90010
9131	Wire Jumper, 0.58MM.	3198 036 90010
9132	Wire Jumper, 0.58MM.	3198 036 90010
9133	Wire Jumper, 0.58MM.	3198 036 90010
9134	Wire Jumper, 0.58MM.	3198 036 90010
9135	Wire Jumper, 0.58MM.	3198 036 90010
9136	Wire Jumper, 0.58MM.	3198 036 90010
9137	Wire Jumper, 0.58MM.	3198 036 90010
9138	Wire Jumper, 0.58MM.	3198 036 90010
9139	Wire Jumper, 0.58MM.	3198 036 90010
9140	Wire Jumper, 0.58MM.	3198 036 90010
9141	Wire Jumper, 0.58MM.	3198 036 90010
9142	Wire Jumper, 0.58MM.	3198 036 90010
9143	Wire Jumper, 0.58MM.	3198 036 90010
9144	Wire Jumper, 0.58MM.	3198 036 90010
9145	Wire Jumper, 0.58MM.	3198 036 90010
9146	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

9148	Wire Jumper, 0.58MM.	3198 036 90010
9149	Wire Jumper, 0.58MM.	3198 036 90010
9150	Wire Jumper, 0.58MM.	3198 036 90010
9151	Wire Jumper, 0.58MM.	3198 036 90010
9152	Wire Jumper, 0.58MM.	3198 036 90010
9153	Wire Jumper, 0.58MM.	3198 036 90010
9154	Wire Jumper, 0.58MM.	3198 036 90010
9155	Wire Jumper, 0.58MM.	3198 036 90010
9156	Wire Jumper, 0.58MM.	3198 036 90010
9157	Wire Jumper, 0.58MM.	3198 036 90010
9158	Wire Jumper, 0.58MM.	3198 036 90010
9159	Wire Jumper, 0.58MM.	3198 036 90010
9160	Wire Jumper, 0.58MM.	3198 036 90010
9161	Wire Jumper, 0.58MM.	3198 036 90010
9162	Wire Jumper, 0.58MM.	3198 036 90010
9163	Wire Jumper, 0.58MM.	3198 036 90010
9164	Wire Jumper, 0.58MM.	3198 036 90010
9165	Wire Jumper, 0.58MM.	3198 036 90010
9166	Wire Jumper, 0.58MM.	3198 036 90010
9167	Wire Jumper, 0.58MM.	3198 036 90010
9168	Wire Jumper, 0.58MM.	3198 036 90010
9169	Wire Jumper, 0.58MM.	3198 036 90010
9170	Wire Jumper, 0.58MM.	3198 036 90010
9171	Wire Jumper, 0.58MM.	3198 036 90010
9172	Wire Jumper, 0.58MM.	3198 036 90010
9173	Wire Jumper, 0.58MM.	3198 036 90010
9174	Wire Jumper, 0.58MM.	3198 036 90010
9175	Wire Jumper, 0.58MM.	3198 036 90010
9176	Wire Jumper, 0.58MM.	3198 036 90010
9177	Wire Jumper, 0.58MM.	3198 036 90010
9178	Wire Jumper, 0.58MM.	3198 036 90010
9179	Wire Jumper, 0.58MM.	3198 036 90010
9181	Wire Jumper, 0.58MM.	3198 036 90010
9182	Wire Jumper, 0.58MM.	3198 036 90010
9183	Wire Jumper, 0.58MM.	3198 036 90010
9185	Wire Jumper, 0.58MM.	3198 036 90010
9186	Wire Jumper, 0.58MM.	3198 036 90010
9187	Wire Jumper, 0.58MM.	3198 036 90010
9188	Wire Jumper, 0.58MM.	3198 036 90010
9189	Wire Jumper, 0.58MM.	3198 036 90010
9190	Wire Jumper, 0.58MM.	3198 036 90010
9191	Wire Jumper, 0.58MM.	3198 036 90010
9192	Wire Jumper, 0.58MM.	3198 036 90010
9193	Wire Jumper, 0.58MM.	3198 036 90010
9194	Wire Jumper, 0.58MM.	3198 036 90010
9195	Wire Jumper, 0.58MM.	3198 036 90010
9196	Wire Jumper, 0.58MM.	3198 036 90010
9197	Wire Jumper, 0.58MM.	3198 036 90010
9199	Wire Jumper, 0.58MM.	3198 036 90010
9201	Wire Jumper, 0.58MM.	3198 036 90010
9202	Wire Jumper, 0.58MM.	3198 036 90010
9203	Wire Jumper, 0.58MM.	3198 036 90010
9204	Wire Jumper, 0.58MM.	3198 036 90010
9205	Wire Jumper, 0.58MM.	3198 036 90010
9206	Wire Jumper, 0.58MM.	3198 036 90010
9207	Wire Jumper, 0.58MM.	3198 036 90010
9208	Wire Jumper, 0.58MM.	3198 036 90010
9209	Wire Jumper, 0.58MM.	3198 036 90010
9210	Wire Jumper, 0.58MM.	3198 036 90010
9211	Wire Jumper, 0.58MM.	3198 036 90010
9212	Wire Jumper, 0.58MM.	3198 036 90010
9213	Wire Jumper, 0.58MM.	3198 036 90010
9214	Wire Jumper, 0.58MM.	3198 036 90010
9215	Wire Jumper, 0.58MM.	3198 036 90010
9217	Wire Jumper, 0.58MM.	3198 036 90010
9218	Wire Jumper, 0.58MM.	3198 036 90010
9219	Wire Jumper, 0.58MM.	3198 036 90010
9220	Wire Jumper, 0.58MM.	3198 036 90010
9221	Wire Jumper, 0.58MM.	3198 036 90010
9222	Wire Jumper, 0.58MM.	3198 036 90010
9223	Wire Jumper, 0.58MM.	3198 036 90010
9224	Wire Jumper, 0.58MM.	3198 036 90010
9225	Wire Jumper, 0.58MM.	3198 036 90010
9226	Wire Jumper, 0.58MM.	3198 036 90010
9227	Wire Jumper, 0.58MM.	3198 036 90010
9228	Wire Jumper, 0.58MM.	3198 036 90010
9229	Wire Jumper, 0.58MM.	3198 036 90010
9230	Wire Jumper, 0.58MM.	3198 036 90010
9231	Wire Jumper, 0.58MM.	3198 036 90010
9232	Wire Jumper, 0.58MM.	3198 036 90010
9233	Wire Jumper, 0.58MM.	3198 036 90010
9234	Wire Jumper, 0.58MM.	3198 036 90010
9235	Wire Jumper, 0.58MM.	3198 036 90010
9237	Wire Jumper, 0.58MM.	3198 036 90010
9238	Wire Jumper, 0.58MM.	3198 036 90010
9239	Wire Jumper, 0.58MM.	3198 036 90010
9240	Wire Jumper, 0.58MM.	3198 036 90010
9241	Wire Jumper, 0.58MM.	3198 036 90010
9242	Wire Jumper, 0.58MM.	3198 036 90010
9243	Wire Jumper, 0.58MM.	3198 036 90010
9244	Wire Jumper, 0.58MM.	3198 036 90010
9245	Wire Jumper, 0.58MM.	3198 036 90010
9246	Wire Jumper, 0.58MM.	3198 036 90010
9247	Wire Jumper, 0.58MM.	3198 036 90010
9248	Wire Jumper, 0.58MM.	3198 036 90010
9249	Wire Jumper, 0.58MM.	3198 036 90010
9250	Wire Jumper, 0.58MM.	3198 036 90010
9251	Wire Jumper, 0.58MM.	3198 036 90010
9252	Wire Jumper, 0.58MM.	3198 036 90010
9254	Wire Jumper, 0.58MM.	3198 036 90010
9255	Wire Jumper, 0.58MM.	3198 036 90010
9256	Wire Jumper, 0.58MM.	3198 036 90010
9257	Wire Jumper, 0.58MM.	3198 036 90010
9258	Wire Jumper, 0.58MM.	3198 036 90010
9259	Wire Jumper, 0.58MM.	3198 036 90010
9260	Wire Jumper, 0.58MM.	3198 036 90010
9261	Wire Jumper, 0.58MM.	3198 036 90010
9263	Wire Jumper, 0.58MM.	3198 036 90010
9264	Wire Jumper, 0.58MM.	3198 036 90010
9265	Wire Jumper, 0.58MM.	3198 036 90010
9266	Wire Jumper, 0.58MM.	3198 036 90010
CBA	SSM Panel Assembly (Core).	3135 037 11241

SSB Panel Parts

	SSB Panel Parts	
0002	Shielding, Frame, SSB.	3104 301 24124
0003	Shielding, Top Cover, SSB.	3104 301 24111
0082	Shielding, Bottom Cover, SSB	3104 301 23963
0302	Connector, 2 Pin	2422 025 16542
1001	Resonator, Crystal, 12MHz.	2422 543 89018
1002	Connector, 10 Pin.	2422 025 16729
1003	Fuse, 500MA, 50V, UL	2422 086 11092
1303	Connector, 5 Pin	2422 025 16966
1304	Connector, 7 Pin	2422 025 17104
1318	Resonator, Crystal, 3.579545MHz. . .	2422 543 00861
1407	Filter, Ceramic, 4MHZ5, TPSCC*MB. .	2422 549 44043
1408	Filter, S.A.W. 45Mhz75	2422 549 44377
1410	Filter, Ceramic, 4M5, SFSCC*MCC BP .	2422 549 44534
1651	Resonator, Crystal, 18.432MHz. . . .	2422 543 89019
1680	Connector, 6 Pin	2422 025 16961
1681	Connector, 3 Pin	2422 025 17103
1682	Connector, 10 Pin.	2422 025 16729
1701	Resonator, Crystal, 12MHz.	2422 543 89018
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2003	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2004	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2009	Cap, 470p, 5%, 50V, Ceramic.	3198 016 34710
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2014	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2015	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2016	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2023	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2024	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2025	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2026	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2032	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2033	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2300	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2302	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2304	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2306	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2314	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2315	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2321	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2323	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
2324	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2328	Cap, 22p, 5%, 50V, Ceramic	3198 016 32290
2340	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2341	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2342	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2350	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2351	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2352	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2356	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2357	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2358	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 33320
2361	Cap, 1p2, 21%, 50V, Ceramic.	3198 016 31280
2362	Cap, 12p, 5%, 50V, Ceramic	3198 016 31290

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2365	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2366	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2367	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2368	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2369	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2370	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2371	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2372	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2373	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2374	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2375	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2376	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2377	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2378	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2384	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2395	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2396	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2397	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2401	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
2410	Cap, 470n, 10%, 16V, Ceramic	2222 780 15658
2411	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2412	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 34720
2413	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2418	Cap, 10p, 5%, 50V, Ceramic	3198 016 31090
2420	Cap, 150p, 5%, 50V, Ceramic.	3198 016 31510
2422	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2501	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2502	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2503	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2504	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2505	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2506	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2507	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2508	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2510	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2511	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2512	Cap, 470n, +80/-20%, 10V, Ceramic. .	3198 017 44740
2550	Cap, 330p, 10%, 50V, Ceramic	3198 017 33310
2552	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2553	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2554	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2555	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2562	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2563	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2564	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2565	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2566	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2567	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2568	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2569	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2570	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2571	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2574	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2575	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2576	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2577	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2578	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2579	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2584	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2585	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2586	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2592	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2593	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2594	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2595	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2609	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2610	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 32220
2611	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2632	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2634	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2640	Cap, 220n, +80/-20%, 16V, Ceramic. .	3198 017 42240
2643	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2644	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2645	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2646	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2649	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2651	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2652	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2653	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2654	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2659	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2660	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2661	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2662	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2663	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2664	Cap, 470p, 10%, 50V, Ceramic	3198 017 34710
2665	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2666	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2667	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2668	Cap, 3p3, 8%, 50V, Ceramic	3198 016 33380
2670	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2673	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2674	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2677	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2678	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2679	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2680	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2681	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2682	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2686	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2687	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2691	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
2693	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2694	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2695	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2696	Cap, 330n, +80/-20%, 25V, Ceramic. .	2222 910 19856
2702	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2704	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2706	Cap, 100u, 20%, 16V, Electrolytic. .	2020 021 91555
2708	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2709	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2710	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2712	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2713	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2728	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2729	Cap, 56p, 5%, 50V, Ceramic	3198 016 35690
2730	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2731	Cap, 100p, 5%, 50V, Ceramic.	3198 016 31010
2733	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2738	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2743	Cap, 22n, 10%, 25V, Ceramic.	3198 017 32230
2747	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2748	Cap, 18p, 5%, 50V, Ceramic	3198 016 31890
2755	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2756	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2758	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2759	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2760	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2761	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2762	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2763	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2764	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2765	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2766	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2767	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2770	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2771	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2772	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2773	Cap, 1n, 5%, 25V, Ceramic.	3198 016 31020
2774	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2776	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2785	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2786	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2788	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2790	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2792	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2795	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2796	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2798	Cap, 680p, 5%, 25V, Ceramic.	3198 016 36810
2799	Cap, 10u, 20%, 16V, Electrolytic . .	2020 021 91556
2908	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2909	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2910	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2911	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2912	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
3001	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3002	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3006	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3008	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3009	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3010	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3011	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3012	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3015	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3018	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
3019	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3021	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3026	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3027	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3028	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3029	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3030	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3031	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3032	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3033	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3034	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3035	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3039	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3040	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3041	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3042	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3043	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3044	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3045	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3048	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3049	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3050	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3051	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3052	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3053	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3056	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3057	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3058	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3059	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3060	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3061	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3062	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3063	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3064	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3065	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3066	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3067	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3068	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3069	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3070	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3071	Res, 1R5, 5%, 1/8W, Metalized Glass.	2322 750 61508
3074	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3076	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3077	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3300	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3304	Res, 3R9, 5%, 1/8W, Metalized Glass.	2322 750 63908
3305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3311	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3313	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3314	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3315	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3316	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3317	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3319	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3324	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3329	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3332	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3333	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3337	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3340	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3341	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3342	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3355	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3360	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3368	Res, 220 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32210
3370	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3371	Res, 47 ohm, 5%, 1/16W, Metalized Gla ss.	3198 021 34790
3372	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3373	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3374	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3376	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3377	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3378	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3382	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3384	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3385	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3387	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3393	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3395	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3396	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3397	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3398	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3400	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3401	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3402	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3403	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3405	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3415	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3416	Res, 6R8, 5%, 1/8W, Metalized Glass.	2322 750 66808
3418	Res, 390 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33910
3419	Res, 330 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 33310
3420	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3436	Res, 270 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 32710
3437	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3441	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3446	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3456	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3457	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3458	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3460	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3461	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3462	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3463	Res, 18K, 5%, 1/16W, Metalized Glass	3198 021 31830
3467	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3519	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3521	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3522	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3523	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3524	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3525	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3526	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3527	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3529	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3530	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3531	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3532	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3533	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3540	Cap, 1u, +80/-20%, 10V, Ceramic. . .	3198 017 41050
3546	Res, 470 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 34710
3550	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3558	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3559	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3560	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3561	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3562	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3563	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3564	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3565	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3566	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3567	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3570	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3571	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3572	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010
3574	Res, 100 ohm, 5%, 1/16W, Metalized Gl ass.	3198 021 31010

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3576	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3577	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3624	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3625	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3630	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3634	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3636	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3637	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3639	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3642	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3643	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3644	Res, 4R7, 5%, 1/8W, Metalized Glass.	2322 750 64708
3651	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3652	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3653	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3654	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3655	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3656	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3657	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3658	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3666	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3667	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3668	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3669	Res, 270 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32710
3670	Res, 470 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34710
3671	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3684	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3685	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3686	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3687	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3688	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3689	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3690	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3691	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3692	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3693	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3694	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3695	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3698	Res, 680 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36810
3699	Res, 56K, 5%, 1/16W, Metalized Glass	3198 021 35630
3702	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3703	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3705	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3706	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3707	Res, 3K9, 5%, 1/16W, Metalized Glass	3198 021 33920
3708	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3709	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3710	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3711	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3714	Res, 22 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32290
3716	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3717	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3718	Res, 220 ohm, 5%, 1/16W, Metalized Glass.	3198 021 32210
3725	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3728	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3731	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3732	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3733	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3739	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3740	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3741	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3744	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3745	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3746	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3747	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3748	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3749	Res, 68 ohm, 5%, 1/16W, Metalized Glass.	3198 021 36890
3754	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3755	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3757	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3759	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
3790	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3791	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3792	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3793	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3794	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3795	Resistor Network, 100 ohm, 5%. . . .	3198 031 11010
3796	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3797	Res, 100 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31010
3900	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3901	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3902	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3903	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3904	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3905	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3906	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3907	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3908	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3909	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3910	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
3911	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4310	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4311	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4312	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4313	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4322	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4326	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4406	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4409	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4520	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4522	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4603	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4604	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4610	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4611	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4632	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4633	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4642	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4645	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4682	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4683	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4685	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4686	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4688	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4689	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4712	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4713	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4714	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4715	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4716	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4717	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4723	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4724	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4726	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4732	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4734	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4792	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4793	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4901	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4906	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4908	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4919	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4920	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4921	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4925	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4927	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4928	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4929	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4935	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4937	Res, Zero ohm, 'Chip' Jumper	3198 021 90030

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

4938	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4939	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4944	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4945	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4946	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4947	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4948	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4949	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4950	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4951	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4952	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4953	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4954	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5301	Coil, 6u8.	3198 018 36880
5303	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5304	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5305	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5306	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5307	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5308	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5309	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5401	Coil, 390n	3198 018 33970
5406	Coil, 15u.	3198 018 31590
5407	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5408	Variable, Inductor, 91MHz.	2422 549 44875
5409	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5410	Coil, 1u	3198 018 51080
5412	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5413	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5414	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5651	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5652	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5653	Inductor, Fixed, EMI, 100MHz, 30R. .	2422 549 43769
5654	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5656	Coil, 6u8.	3198 018 36880
5657	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5658	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5659	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5660	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5661	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5662	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5663	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5664	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5665	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5666	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5667	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5668	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5701	Inductor, Fixed, 100MHz, 600 ohm . .	3198 018 90080
5702	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5703	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5705	Inductor, Fixed, EMI, 100MHz, 120R .	2422 535 95427
5706	Coil, 5u6.	3198 018 35680
5707	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5711	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5713	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5718	Coil, 330n	3198 018 33370
5720	Inductor, Fixed, 100MHz, 600R. . . .	3198 018 90040
5798	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5799	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5900	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5901	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5902	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5903	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5904	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
6003	Diode, Signal, BAS316.	3198 010 10630
6303	Zener Diode, 47 volt	9340 389 00115
6304	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Zener Diode, 22 volt	3198 020 52290
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6316	Diode, Signal, BAS316.	3198 010 10630
6319	Diode, Signal, BAS316.	3198 010 10630
6652	Zener Diode, 10 volt	3198 020 51090
6654	Diode, Signal, BAS316.	3198 010 10630
6657	Zener Diode, 2.7 volt.	9340 548 43115
6658	Diode, Signal, BAS316.	3198 010 10630
7001	IC, SAA5677/HL/M1.	9352 692 99557
7002	Transistor, PNP, BC857B.	3198 010 42150
7003	Transistor, NPN, BC847BW	3198 010 42310
7004	Transistor, NPN, BC847BW	3198 010 42310
7005	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7006	Transistor, NPN, PMBT2369.	3198 010 43360
7007	Transistor, NPN, PMBT2369.	3198 010 43360
7009	IC, Voltage/Current Regulator, LD1117 D33.	9322 116 74668
7012	IC, M24C32-WMN6.	9322 124 74668
7013	Transistor, NPN, PDTC144EU	3198 010 44330
7303	Transistor, NPN, BC857BW	3198 010 42320
7304	Transistor, NPN, PDTC144EU	3198 010 44330
7305	Transistor, NPN, BC847BW	3198 010 42310
7320	Transistor, NPN, BC847BW	3198 010 42310
7322	Transistor, NPN, BC847BW	3198 010 42310
7323	IC, TDA9321H/N2.	9352 625 24518
7375	Transistor, NPN, BC847BW	3198 010 42310
7410	Transistor, NPN, BC847BW	3198 010 42310
7411	Transistor, NPN, BC847B.	3198 010 42030
7413	Transistor, NPN, BFS20	9330 921 11215
7651	IC, SM, MSP3451G-FH-B8-V3.	9322 183 41702
7664	Transistor, NPN, BC847BPN.	9340 425 30115
7665	Transistor, NPN, BC847BPN.	9340 425 30115
7666	Transistor, NPN, BC847BPN.	9340 425 30115
7668	Transistor, NPN, BC857BW	3198 010 42320
7674	Transistor, NPN, BC847CW	9340 217 80115
7675	Transistor, NPN, BC847BS	9340 425 20115
7678	Transistor, NPN, BC847BS	9340 425 20115
7701	Transistor, NPN, BC857BW	3198 010 42320
7702	Transistor, NPN, BC847BW	3198 010 42310
7704	Transistor, NPN, PMBT2369.	3198 010 43360
7708	IC, SAA4990H/V2.	9352 067 50557
7709	IC, SM, SAA4978H/V204.	9352 688 09557
7714	IC, SM, MSM54V12222B-25JS.	9322 183 81668
7715	IC, SM, MSM54V12222B-25JS.	9322 183 81668
8302	Cable, Shielded, 2 Pin	3104 311 03031
CBA	SSB Panel Assembly (Core).	3104 328 25661

ACS Manual Assembly

	ACS Manual Assembly	
0002	Shield, Cover, ACS	3135 011 04141
1000	Connector, 15 Pin.	2422 025 16977
1001	Connector, 15 Pin.	2422 025 16977
1002	Connector, 1 Pin	2422 034 20021
1003	Connector, 1 Pin	2422 034 20021
1005	Connector, 1 Pin	2422 034 20021
1010	Connector, 4 Pin	2422 025 12479
1011	Connector, 5 Pin	2422 025 12481
1018	Connector, 3 Pin	2412 020 00725
1019	Connector, 2 Pin	2412 020 00724
1200	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1300	Connector, 3 Pin	2422 025 17535
1301	Connector, 6 Pin	2422 025 12482
1302	Connector, 1 Pin	2422 034 20021
2001	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2002	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2003	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2006	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2007	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2008	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2009	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2012	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2016	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2017	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2018	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2019	Cap, 1n5, 10%, 50V, Ceramic.	3198 017 01520
2020	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2021	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2022	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2023	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2024	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2025	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2026	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2027	Cap, 120p, 5%, 50V, Ceramic.	3198 016 01210
2028	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2029	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2030	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2031	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2032	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2033	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2034	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2035	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2040	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2041	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2042	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2043	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2044	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2045	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2046	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2047	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2048	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2049	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2050	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2051	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2052	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2053	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2054	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2055	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2056	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2057	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2058	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2059	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2200	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2204	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2205	Cap, 56p, 5%, 50V, Ceramic	3198 016 05690
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2210	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2211	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2223	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2224	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2235	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2250	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2251	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2252	Cap, 100u, 20%, 16V, Electrolytic. .	3198 030 41010
2253	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2279	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2280	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2281	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2282	Cap, 10u, 20%, 16V, Electrolytic . .	3198 030 41090
2310	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2311	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2312	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2313	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2314	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2315	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2317	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2318	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2319	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2320	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3005	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3020	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3021	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3022	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3023	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3024	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3025	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3026	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3027	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3028	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3029	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3033	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3034	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3035	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3036	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3048	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3050	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3051	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3054	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3055	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3056	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3058	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3061	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3063	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3064	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3065	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3066	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3068	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3069	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3070	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3071	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3073	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3074	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3075	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3076	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3079	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3080	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3081	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3082	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3083	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3084	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3085	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3086	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3087	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3088	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3089	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3202	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3203	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3205	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3207	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3210	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3211	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3212	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3213	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3214	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3215	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3216	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3217	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3218	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3219	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3220	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3221	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3222	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3223	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3224	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3226	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3227	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3229	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3230	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3232	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3233	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3234	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3235	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3236	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3237	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3240	Res, 24K, 1%, 1/8W, Metalized Glass.	2322 734 62403
3241	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3243	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3282	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3291	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3292	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3293	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3294	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3295	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3296	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3297	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3298	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3299	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3306	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3307	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3308	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3309	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3314	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3315	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3316	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3317	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3327	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3328	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3329	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3332	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3333	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3348	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3349	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3350	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3351	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3400	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3401	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3405	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3418	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3419	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4000	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4302	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4304	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4306	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4307	Res, Zero ohm, 'Chip' Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

4308	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5006	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5200	Coil, 100u	2422 535 94279
6000	Diode, Signal, BAS316.	3198 010 10630
6001	Diode, Signal, BAS316.	3198 010 10630
6006	Diode, Signal, BAS316.	3198 010 10630
6208	Diode, Signal, BAS316.	3198 010 10630
6209	Diode, Signal, BAS316.	3198 010 10630
6230	Diode, Signal, BAS316.	3198 010 10630
6231	Zener Diode, 5.1 volt.	9340 386 10115
6308	Diode, Signal, BAS316.	3198 010 10630
6309	Diode, Signal, BAS316.	3198 010 10630
6310	Diode, Signal, BAS316.	3198 010 10630
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Diode, Signal, BAS316.	3198 010 10630
6313	Diode, Signal, BAS316.	3198 010 10630
6314	Diode, Signal, BAS316.	3198 010 10630
6315	Diode, Signal, BAS316.	3198 010 10630
6405	Zener Diode, 5.1 volt.	9340 386 10115
7000	IC, M24128-MN6	9322 117 46668
7002	IC, STV2050A	9322 169 57671
7003	IC, LM833D	9322 068 82668
7004	IC, LM833D	9322 068 82668
7005	IC, LM833D	9322 068 82668
7006	IC, LD1117DT33C.	9322 119 88668
7007	IC, L78M05CDT.	9322 104 47668
7014	Transistor, NPN, BC847B.	3198 010 42030
7015	Transistor, NPN, BC847B.	3198 010 42030
7016	Transistor, NPN, BC847B.	3198 010 42030
7017	Transistor, NPN, BC847B.	3198 010 42030
7020	Transistor, NPN, BC847B.	3198 010 42030
7021	Transistor, PNP, BC857B.	3198 010 42150
7022	Transistor, NPN, BC847B.	3198 010 42030
7023	Transistor, NPN, BC847B.	3198 010 42030
7024	Transistor, PNP, BC857B.	3198 010 42150
7025	Transistor, PNP, BC857B.	3198 010 42150
7026	Transistor, NPN, BC847B.	3198 010 42030
7027	Transistor, NPN, BC847B.	3198 010 42030
7028	Transistor, PNP, BC857B.	3198 010 42150
7036	Transistor, NPN, BC847B.	3198 010 42030
7037	Transistor, NPN, BC847B.	3198 010 42030
7100	IC, SAA5677/HL/M1.	9352 692 99557
7101	IC, A/D Converter, TLV0831CD	9322 173 07668
7140	IC, TL074CD.	9322 015 84668
7141	IC, 74HCT4051D	9337 153 00118
7227	Transistor, NPN, BF570	9338 144 20215
7301	IC, TPS3707-33D.	9322 173 08668
7540	Transistor, NPN, BC847B.	3198 010 42030
CBA	ACS Panel Assembly (Automatic) . . .	3135 037 11391

H.O.P. Panel Parts

	H.O.P. Panel Parts	
1111	Connector, 15 Pin.	2422 025 17519
1150	Socket, Cinch, 3 Pin	2422 026 05298
1180	Socket, Cinch, 2 Pin	2422 026 05297
1250	Connector, 9 Pin	2422 025 16046
1510	Connector, 12 Pin.	2422 025 08333
1601	Crystal Resonator, 12Mhz, 20P, DSX840 R.	2422 543 01095
1610	Connector, 5 Pin	2422 025 12481
1700	Connector, 3 Pin	2412 020 00725
1701	Connector, 5 Pin	2422 025 12481
1710	Connector, 3 Pin	2412 020 00725
1711	Connector, 5 Pin	2422 025 12481
1720	Connector, 3 Pin	2412 020 00725
1721	Connector, 5 Pin	2422 025 12481
1950	Connector, 9 Pin	2422 025 16046
2111	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2150	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2160	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2170	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2190	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2191	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2210	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2216	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2220	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2230	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2247	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2248	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2250	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2260	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2270	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2290	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2291	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2321	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2322	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2324	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2325	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2326	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2329	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2330	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2331	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2409	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2410	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2416	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2419	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2420	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2421	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2422	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2424	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2429	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2430	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2436	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2439	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2440	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2441	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2442	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2444	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2449	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2450	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2456	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2459	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2460	Cap, 4p7, 5%, 50V, Ceramic	3198 016 04780
2461	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2462	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2464	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2470	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2471	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2472	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2473	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2480	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2481	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2482	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2483	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2490	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2491	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2492	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2493	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2500	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2501	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2502	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2505	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2506	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2507	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2509	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2510	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2511	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2519	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2520	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2521	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2601	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2602	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2607	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2615	Cap, 100n, 5%, 16V, Polypropylene. .	2020 319 90005
2616	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2617	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2618	Cap, 2u2, +80/-20%, 10V, Ceramic . .	3198 017 22250
2619	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2620	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2621	Cap, 12p, 5%, 50V, Ceramic	3198 016 01290
2626	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2627	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2628	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2632	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2633	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2634	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2635	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2636	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2637	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2638	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2639	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2644	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2700	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2701	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2702	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2704	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2710	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2711	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2714	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2720	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2721	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2724	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2731	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2740	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2741	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2750	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2800	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2802	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2804	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2806	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2807	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

2809	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2810	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2811	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2812	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2813	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2814	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2815	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2816	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2901	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2902	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2903	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2904	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2905	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2906	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2909	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2910	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2911	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2912	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2913	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2922	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2923	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2924	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2931	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2933	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2944	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2945	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2951	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2952	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2953	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2957	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2958	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2961	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2963	Cap, 47u, 20%, 16V, Electrolytic . .	3198 030 44790
2968	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3150	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3151	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3160	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3161	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3170	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3171	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3180	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3181	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3185	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3186	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3247	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3248	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3251	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3261	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3271	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3281	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3286	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3320	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3321	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3322	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3323	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3324	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3325	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3326	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3331	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3332	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3333	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3335	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3336	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3339	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3410	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3411	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3412	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3413	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3414	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3415	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3416	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3418	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3419	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3420	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3421	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3424	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3425	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3426	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3427	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3428	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3429	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3430	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3431	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3432	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3433	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3434	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3435	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3436	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3438	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3439	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3441	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3442	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3443	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3444	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3445	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3447	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3448	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3449	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3450	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3451	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3452	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3453	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3454	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3455	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3456	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3458	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3459	Res, 430 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 64301
3460	Res, 180 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51810
3461	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3462	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3463	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3464	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3465	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3467	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3468	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3470	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3480	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3481	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3490	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3491	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3500	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3501	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3502	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3507	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

3510	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3511	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3515	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3518	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3519	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3521	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3522	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3523	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3525	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3526	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3527	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3528	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3529	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3530	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3531	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3532	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3540	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
3541	Res, 22 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52290
3542	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3601	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3602	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3603	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3604	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3607	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3608	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3609	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3613	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3614	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3616	Res, 39K, 1%, 1/10W, Metalized Glass	2120 108 92633
3623	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3624	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3626	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3627	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3628	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3630	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3631	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3632	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3633	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3634	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3635	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3636	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3637	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3638	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3639	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3643	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3645	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3646	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3647	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3648	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3700	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3701	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3702	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3703	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3704	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3705	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3706	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3707	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3708	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3710	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3711	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3712	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3713	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3714	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3715	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3716	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3720	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3721	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3722	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3723	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3724	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3725	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3726	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3727	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3730	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3731	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3732	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3740	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3750	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3801	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3802	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3803	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3804	Res, 3K, 1%, 1/8W, Metalized Glass .	2322 734 63002
3805	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3806	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3807	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3809	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3810	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3811	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3812	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3813	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3814	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3815	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3824	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3825	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3901	Res, 18K, 5%, 1/10W, Metalized Glass	3198 021 51830
3902	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3903	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3911	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3922	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3923	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3944	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3951	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3952	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3953	Res, 1 ohm, 5%, 1/8W, Metalized Glass	2322 750 61008
3955	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3956	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3965	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3966	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
4605	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4907	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5410	Coil, 680n	3198 018 36870
5411	Coil, 1u5.	3198 018 31580
5430	Coil, 680n	3198 018 36870
5431	Coil, 1u5.	3198 018 31580
5450	Coil, 680n	3198 018 36870
5451	Coil, 1u5.	3198 018 31580
5701	Coil, 820n	3198 018 38270
5711	Coil, 820n	3198 018 38270
5721	Coil, 820n	3198 018 38270
6151	Diode, Signal, BAS316.	3198 010 10630
6152	Diode, Signal, BAS316.	3198 010 10630
6161	Diode, Signal, BAS316.	3198 010 10630
6162	Diode, Signal, BAS316.	3198 010 10630
6171	Diode, Signal, BAS316.	3198 010 10630
6172	Diode, Signal, BAS316.	3198 010 10630
6181	Diode, Signal, BAS316.	3198 010 10630
6182	Diode, Signal, BAS316.	3198 010 10630
6186	Diode, Signal, BAS316.	3198 010 10630
6187	Diode, Signal, BAS316.	3198 010 10630
6331	Diode, Signal, BAS316.	3198 010 10630
6495	Diode, Signal, BAS316.	3198 010 10630
6643	Diode, Signal, BAS316.	3198 010 10630
6923	Zener Diode, 6.8 volt.	9340 386 40115
6963	Diode, Rect, S1D.	9322 128 69685
7110	IC, BA7657F.	9322 115 62668
7210	IC, BA7657F.	9322 115 62668
7328	IC, 74HC4538D.	9337 149 10653
7330	IC, 74HC157D	9337 137 40653
7410	IC, SM MC1496D	9339 656 40668
7411	Transistor, NPN, BF570	9338 144 20215
7412	Transistor, PNP, BF550	9334 509 00215
7413	Transistor, PNP, BF550	9334 509 00215
7414	Transistor, PNP, BF550	9334 509 00215
7430	IC, SM MC1496D	9339 656 40668
7431	Transistor, NPN, BF570	9338 144 20215

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

7432	Transistor, PNP, BF550	9334 509 00215
7433	Transistor, PNP, BF550	9334 509 00215
7434	Transistor, PNP, BF550	9334 509 00215
7450	IC, SM MC1496D	9339 656 40668
7451	Transistor, NPN, BF570	9338 144 20215
7452	Transistor, PNP, BF550	9334 509 00215
7453	Transistor, PNP, BF550	9334 509 00215
7454	Transistor, PNP, BF550	9334 509 00215
7510	IC, SM MC1496D	9339 656 40668
7511	Transistor, NPN, BF570	9338 144 20215
7520	IC, SM MC1496D	9339 656 40668
7521	Transistor, NPN, BF570	9338 144 20215
7530	Transistor, NPN, BF570	9338 144 20215
7540	Transistor, NPN, BF570	9338 144 20215
7600	IC, TDA9332H/N2.	9352 625 21557
7700	Transistor, NPN, BF570	9338 144 20215
7701	Transistor, PNP, BF550	9334 509 00215
7710	Transistor, NPN, BF570	9338 144 20215
7711	Transistor, PNP, BF550	9334 509 00215
7720	Transistor, NPN, BF570	9338 144 20215
7721	Transistor, PNP, BF550	9334 509 00215
7730	Transistor, PNP, BF550	9334 509 00215
7800	IC, TDA8444T/N4.	9350 897 50118
7805	Transistor, NPN, BC847B.	9335 895 90215
7900	IC, LM393D	9339 849 10668
7922	Transistor, PNP, BC807-25.	9336 285 70215
CBA	HOP Panel Assembly (Core).	3135 037 10361

CRT Panel Parts

	CRT Panel Parts	
0001	Heatsink Compound.	3135 031 60081
0002	Spring	3135 011 01041
1201	Connector, 2 Pin	2422 025 10646
1202	4 Pin Connector.	2422 025 12489
S 1203	CRT Socket	2422 500 80037
1204	Connector, 1 Pin	2422 024 00628
S 1205	Surge Protector 1.5kV.	2422 549 43675
S 1206	Surge Protector.	2422 549 43073
1207	Connector, 5 Pin	2422 025 06353
1208	1 Pin Connector.	2422 034 20021
S 1209	Surge Protector.	2422 549 43073
1210	Connector, 3 Pin	2422 025 09191
1212	Connector, 4 Pin	2422 025 12479
1217	Connector, 5 Pin	2422 025 12481
2200	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2203	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2204	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2206	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
2207	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2208	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2209	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2210	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2211	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2212	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2213	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2214	Cap, 47n, 10%, 500V, Ceramic	2020 557 90697
2215	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2216	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2217	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2218	Cap, 100p, 10%, 1KV, Ceramic	2020 558 90522
2219	Cap, 2p2, 11%, 50V, Ceramic.	3198 016 02280
2221	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
3200	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3201	Res, 22 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 52290
3202	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90016
3203	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3206	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3208	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3209	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3210	Res, 10K, 20%, 1/2W, Carbon Film . .	2120 103 90029
3211	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3212	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3213	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3215	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3216	Res, 10 ohm, 5%, 1/8W, Metalized Glas	2322 750 61009
3217	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3218	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90018
3223	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3225	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3226	Zero ohm, 'Chip' Jumper.	2120 368 90118
3227	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
5200	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5201	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5202	Coil, 470n	3198 018 34770
5203	Coil, 470n	3198 018 34770
6200	Diode, Rect, BYD33M	9337 410 30133
6201	Diode BAS21.	9335 020 40215
6204	Diode, Signal, BAS316.	3198 010 10630
7200	Transistor, NPN, BF570	9338 144 20215
7201	IC, TDA6120Q/N2.	9352 626 34112
7202	Transistor, NPN, BF570	9338 144 20215
CBA	CRT Panel, (All)	3135 037 10081

Keyboard Parts

1001	Switch, Tactile.	2422 128 02742
1002	Switch, Tactile.	2422 128 02742
1003	Switch, Tactile.	2422 128 02742
1004	Switch, Tactile.	2422 128 02742
1006	Switch, Tactile.	2422 128 02742
1007	Switch, Tactile.	2422 128 02742
1200	LED, Holder (Not Shown).	3135 034 00711
1214	7 Pin Connector.	2422 025 12491
1215	1 Pin Board Connector.	2422 015 18551
2003	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2004	Cap, 100u, 20%, 16V, Electrolytic. .	3198 028 21010
3008	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3010	Res, 1K5, 1%, 1/8W, Metalized Glass.	2322 734 61502
3011	Res, 750 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 87501
3012	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3013	Res, 270 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 62701
3015	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3017	Res, 3K9, 1%, 1/8W, Metalized Glass.	2322 734 63902
3020	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3025	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
6002	LED VS TLDR5400.	9322 110 34682
6005	IR Receiver, TSOP1736	9322 152 44687
6009	Zener Diode, 6.8 volt.	9340 386 40115
6011	Zener Diode, 6.8 volt.	9340 386 40115
6013	Zener Diode, 6.8 volt.	9340 386 40115
6014	Zener Diode, 6.8 volt.	9340 386 40115
6015	Zener Diode, 6.8 volt.	9340 386 40115
6016	Zener Diode, 6.8 volt.	9340 386 40115
CBA	Keyboard Assembly.	3135 037 10551

Side Jack Panel Parts

1001	Cinch Connector.	2422 026 04756
1002	Socket, MDIN, 10 Pin	2422 026 04926
1007	Socket, Phone, 1 Pin	2422 026 04747
1335	Connector, 10 Pin.	2422 025 12484
1337	Connector, 1 Pin	2422 015 18552
1344	Connector, 3 Pin	2412 020 00725
2000	Cap, 220n, +80/-20%, 25V, Ceramic. .	2238 910 19854
2001	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2002	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
3000	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3001	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3002	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3005	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3006	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3007	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3009	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3019	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3020	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3023	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3028	Res, 10 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 51090
3029	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3030	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
6000	Zener Diode, 6.8 volt.	3198 020 56880
6001	Zener Diode, 6.8 volt.	3198 020 56880
6002	Zener Diode, 6.8 volt.	3198 020 56880
6003	Zener Diode, 6.8 volt.	3198 020 56880
6004	Zener Diode, 6.8 volt.	3198 020 56880
6005	Zener Diode, 6.8 volt.	3198 020 56880
6006	Zener Diode, 6.8 volt.	3198 020 56880
6007	Zener Diode, 6.8 volt.	3198 020 56880
6008	Zener Diode, 6.8 volt.	3198 020 56880
6009	Zener Diode, 6.8 volt.	3198 020 56880
6010	Zener Diode, 6.8 volt.	3198 020 56880
6011	Zener Diode, 6.8 volt.	3198 020 56880
6012	Zener Diode, 6.8 volt.	3198 020 56880
6013	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

60PW938317F (continued)

9000	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010
CBA	Side Jack Panel Assembly	3135 037 10581